

CHERUBINI

ELECTRONIC DRIVE SYSTEMS

PRODUCT BOOK

EN



70.3



ELECTRONIC DRIVE SYSTEMS

PRODUCT BOOK



70.3

From production to distribution, solutions made in Cherubini.

To offer Italian excellence to those who choose us, we conceive and develop our products in-house, carefully selecting the raw materials to be processed.

The production cycle is all carried out in specialised departments, and the advanced technological core of our products makes them easy and intuitive to programme and use.



CHERUBINI
tocco italiano dal 1947



GIRO and POP

The best option is the most stylish one.



Two complete and functional lines, expressing two distinct personalities.

GIRO, the innovative, elegant and sophisticated remote control.

POP, practical and lively, customisable in six colours.



HOME AUTOMATION EVOLUTION

New solutions for a more connected world.

A NEW MOTOR CONCEPT, MULTIPLE OPPORTUNITIES.

Our new generation of dual-radio motors integrates the Cherubini Remote Control CRC RX and Z-Wave radio protocols.

OPEN ZRX for rolling shutters, ORA ZRX for awnings and REBIS ZRX for technical blinds and screens are based on our dual-radio patent to create increasingly open, connected, and smart Home Building Automation systems.

MORE THAN ONE GATEWAY: AN OPEN ECOSYSTEM.

METAHome is the gateway designed as a multi-standard: today based on the Cherubini CRC RX and Z-Wave radio protocols, it has been also developed to manage EnOcean or ZigBee.

METAHome is the versatile solution for creating an ecosystem capable of integrating devices through different protocols, which can be easily managed via the dedicated App or the Google Home and Alexa voice assistants.



AN INCREASINGLY SMART BUILDING.

Our Home Automation is open to endless possibilities: besides our range of META smart devices, it is also compatible with numerous Z-Wave devices available on the market, capable of managing new building functions.

THE USER AT THE CENTRE.

All our solutions facilitate every type of user: maximum freedom and simplicity of installation and configuration for the installer, modularity and customisation for the end customer.



ONE MOTOR, TWO INTEGRATED PROTOCOLS

Dual Cherubini CRC_{RX} and
Z-Wave radio in one device.



The new dual radio ZRX motor series combines the convenience of installation and use via traditional Cherubini radio remote controls with the perfect motor integration in Z-Wave systems.

OPEN ZRX for rolling shutters, **ORA ZRX** for awnings and **REBIS ZRX** for technical blinds and screens open up our evolution towards an increasingly smart home through automation that is easy, intuitive and at the service of quality of life.



EASY CONNECTOR

Quick-connect unit, perfect for building sites.



The Easy Connector makes motor installation quick and easy, facilitating work on site.

Designed for immediate, stable connection.

Compact size connector: only 18 mm in diameter.

Compatible with the dedicated OPTime Easy radio receiver.

Installed as standard on Plug&Play Safe Easy and Plug&Play Ocean Easy motors, the Easy connector is also available on request on other models: discover all the details with your agent.



THE CABLE MUST BE ORDERED SEPARATELY



BLACK CONNECTOR (STANDARD CABLING)

Code	A4503_0333	A4503_0311	A4503_0314	A4503_0369
Length	1 m	2 m	4 m	8 m



WHITE CONNECTOR

Code	A4503_0M69	A4503_0M70	A4503_0M71	A4503_0M72
Length	1 m	2 m	4 m	8 m

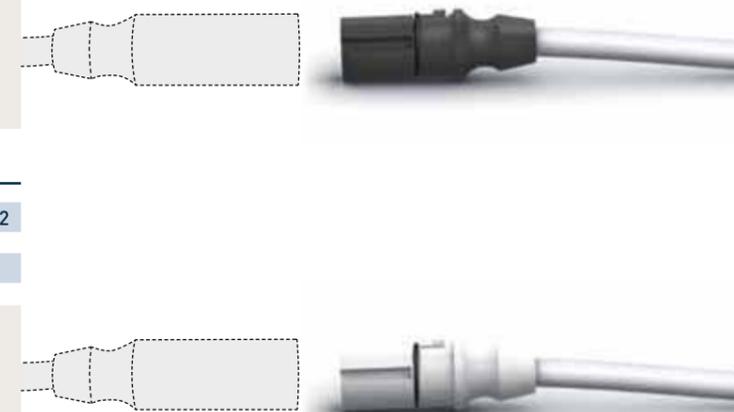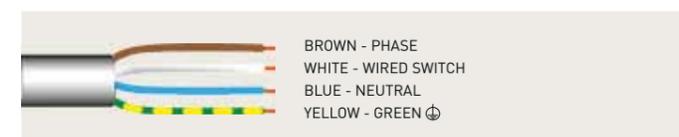

MOTORS

Ø 45

Universal head, more efficient and compact electronic board, Cherubini colours.



The Ø 45 motor range has been completely renewed by introducing Burgundy and Cherubini Blue colours and a more efficient and compact electronic board.

In both mechanical and electronic versions, the universal head can be installed on all the main supports on the market. And thanks to the supplied removable shoulders, it is compatible with any Cherubini bracket.



NEW, MORE RELIABLE, EFFICIENT AND COMPACT ELECTRONIC BOARD.





SELECTION TABLES

page 19

TUBULAR MOTORS

page 29

HOME AUTOMATION AND REMOTE CONTROLS

page 105

ACCESSORIES

page 145

GENERAL SALES TERMS AND WARRANTY

page 161 - 162

TECHNOLOGY



Dual-Radio

The dual-radio allows the motor to be programmed and controlled via two different protocols: Cherubini Remote Control RX and Z-Wave. The CRC RX protocol allows the motor to be installed traditionally using Cherubini remote controls by executing specific command sequences. Using the Z-Wave protocol, it is possible to configure the motor through a Z-Wave gateway, integrating it into a home automation network with constant feedback.



Fast motors

High-speed motors. Mainly indicated for very high vertical systems, large horizontal awnings and projection screens.



Cherubini Remote Control (RX Motors)

The radio system built into all RX motors enables encrypted transmission of the command between the motor and the remote control. Easy programming and operation: the motor confirms all the steps by means of small rotations.




Easy connector

Makes motor installation quick and easy.

SYMBOLS LEGEND




Awnings



Screens and mosquito nets



Pergola



Adjustable shutters



Rolling shutters



Venetian blinds

SERVICES



Training

We are committed to training as the foundation for proper counselling and installation of our products. The aim of our training courses for professional installers is to prepare our clients and their installers in technical training and sales counselling.



Technical service

Assistance in the installation, dealing by phone with a technician from the Cherubini team, or resolving pre-installation queries.



Technical-sales team

The technical-sales team will assist in identifying your needs so they can offer the most adequate product. Sales and technical counselling and support for projects and estimates. Direct phone contact with the client and the installation for on-site solutions to any incident or query.

"Efficient service is based on listening to customers and understanding their needs.

This is where our advice in providing the best solution starts."

*Marco Podavini
Technical Service*



SELECTION TABLES



**TUBULAR MOTORS FOR
AWNINGS**

page 20



**TUBULAR MOTORS FOR
ROLLING SHUTTERS**

page 22



**TUBULAR MOTORS FOR
SCREENS AND
MOSQUITO NETS**

page 26

TUBULAR MOTORS FOR AWNINGS



Cherubini offers you this practical guide in order to help you choose the right model of motor for the installation of your awning. In order to make the right choice, it is necessary to know some characteristics of the awning to be motorized:

- WIND-UP ROLLER DIAMETER
A larger wind-up roller diameter requires a higher motor torque
- AWNING WIDTH
Wind-up roller length
- NUMBER OF ARMS
The arms create perfect tension on the awning fabric
- AWNING PROJECTION
Lengthening of the awning arms: a larger projection requires a higher motor torque

Having determined the above data, we have to look for the torque of the required motor in the selection tables.

Example:

- Wind-up roller diameter: 70 mm
- Number of arms: 2
- Awning projection: 2 m
- Awning width: 6 m

		NUMBER OF ARMS					
		2	2	2	4	6	
AWNING WIDTH (up to)		3,6 m	4,8 m	6 m	12 m	15 m	
Ø63 Ø70 Ø78	AWNING PROJECTION	1,5 m	25 Nm	25 Nm	32 Nm	40 Nm	85 Nm
		2 m	25 Nm	25 Nm	32 Nm	50 Nm	85 Nm
		2,5 m	32 Nm	32 Nm	40 Nm	65 Nm	85 Nm
		3 m	32 Nm	32 Nm	50 Nm	85 Nm	100 Nm
		3,5 m			65 Nm	85 Nm	120 Nm
		4 m			85 Nm	100 Nm	120 Nm

Tables are purely indicative, as variations can occur according to the installation conditions. Contact our technical service for more detailed information.

TUBULAR MOTORS FOR AWNINGS

Which motor meets my requirements?

SELECTION TABLES

Awnings

		NUMBER OF ARMS					
		2	2	2	4	6	
AWNING WIDTH (up to)		3,6 m	4,8 m	6 m	12 m	15 m	
Ø63 Ø70 Ø78	AWNING PROJECTION	1,5 m	25 Nm	25 Nm	32 Nm	40 Nm	85 Nm
		2 m	25 Nm	25 Nm	32 Nm	50 Nm	85 Nm
		2,5 m	32 Nm	32 Nm	40 Nm	65 Nm	85 Nm
		3 m	32 Nm	32 Nm	50 Nm	85 Nm	100 Nm
		3,5 m			65 Nm	85 Nm	120 Nm
		4 m			85 Nm	100 Nm	120 Nm

		NUMBER OF ARMS					
		2	2	2	4	6	
AWNING WIDTH (up to)		3,6 m	4,8 m	6 m	12 m	15 m	
Ø85	AWNING PROJECTION	1,5 m	32 Nm	32 Nm	32 Nm	65 Nm	100 Nm
		2 m	32 Nm	32 Nm	40 Nm	85 Nm	100 Nm
		2,5 m	40 Nm	40 Nm	50 Nm	85 Nm	100 Nm
		3 m	40 Nm	40 Nm	65 Nm	100 Nm	120 Nm
		3,5 m			85 Nm	120 Nm	120 Nm
		4 m			85 Nm	120 Nm	120 Nm

Tables are purely indicative, as variations can occur according to the installation conditions. Contact our technical service for more detailed information.

TUBULAR MOTORS FOR ROLLING SHUTTERS



Cherubini offers you this practical guide in order to help you choose the right model of motor for the installation. In order to make the right choice, it is necessary to know some characteristics of the rolling shutter to be motorized:

- ROLLING SHUTTER WEIGHT

The total weight of the rolling shutter is calculated after determining its surface and the weight of the material used per square meter.

$$\text{MATERIAL WEIGHT} \times \text{SURFACE} = \text{ROLLING SHUTTER WEIGHT}$$

- WIND-UP ROLLER DIAMETER

A larger wind-up roller diameter requires a higher motor torque.

- PROFILE THICKNESS

The profile thickness is of basic importance for the determination of the wind-up diameter generated on the roller.

A larger wind-up roller diameter requires a higher motor torque.

Having determined the above data, we have to look for the torque of the required motor in the selection tables.

Example:

- Rolling shutter material: aluminium profile 3Kg/m²
- Rolling shutter height: 2 m
- Rolling shutter width: 1,5 m
- Wind-up roller: 60 mm

ROLLING SHUTTER SURFACE

$$2 \text{ m} \times 1,5 \text{ m} = 3 \text{ m}^2$$

ROLLING SHUTTER WEIGHT

$$3 \text{ kg/m}^2 \times 3 \text{ m}^2 = 9 \text{ kg}$$

SERIES Ø45

Ø ROLLER		6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	32 Nm*	40 Nm	50 Nm
Ø50/55	Without safety stops	13 kg	21 kg	33 kg	40 kg	46 kg			
	With safety stops	11 kg	18 kg	29 kg	36 kg	41 kg			
Ø60/65	Without safety stops	12 kg	19 kg	28 kg	36 kg	42 kg	54 kg	68 kg	85 kg
	With safety stops	10 kg	15 kg	23 kg	30 kg	36 kg	47 kg	58 kg	73 kg
Ø70/80	Without safety stops	10 kg	15 kg	22 kg	27 kg	36 kg	47 kg	58 kg	73 kg
	With safety stops	7 kg	11 kg	17 kg	21 kg	31 kg	38 kg	48 kg	59 kg

The friction safety coefficient has been taken into consideration in the tables. Tables are purely indicative, as variations can occur according to the installation conditions. Contact our technical service for more detailed information.

* Roll/Modo RX: 30 Nm

TUBULAR MOTORS FOR ROLLING SHUTTERS

Which motor meets my requirements?

SELECTION TABLES

SERIES Ø35

PROFILE THICKNESS up to 10 mm - Without hard hangers

ROLLING SHUTTER MAXIMUM HEIGHT 2500 mm			
Ø ROLLER	3 Nm	5 Nm	9 Nm
Ø40	8 kg	13 kg	24 kg
Ø45	7 kg	12 kg	21 kg
Ø50	6 kg	10 kg	19 kg

ROLLING SHUTTER MAXIMUM HEIGHT 3500 mm			
Ø ROLLER	3 Nm	5 Nm	9 Nm
Ø40	7 kg	11 kg	20 kg
Ø45	6 kg	11 kg	18 kg
Ø50	5 kg	9 kg	17 kg

SERIES Ø45

PROFILE THICKNESS up to 10 mm

ROLLING SHUTTER MAXIMUM HEIGHT 2500 mm									
Ø ROLLER		6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	32 Nm*	40 Nm	50 Nm
Ø50	Without safety stops	15 kg	25 kg	40 kg	50 kg	55 kg			
	With safety stops	13 kg	21 kg	35 kg	46 kg	49 kg			
Ø60	Without safety stops	14 kg	23 kg	33 kg	44 kg	50 kg	65 kg	81 kg	102 kg
	With safety stops	11 kg	18 kg	27 kg	36 kg	43 kg	56 kg	70 kg	87 kg
Ø70	Without safety stops	11 kg	18 kg	26 kg	33 kg	43 kg	56 kg	70 kg	87 kg
	With safety stops	8 kg	13 kg	20 kg	26 kg	37 kg	46 kg	58 kg	71 kg

ROLLING SHUTTER MAXIMUM HEIGHT 3500 mm									
Ø ROLLER		6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	32 Nm*	40 Nm	50 Nm
Ø50	Without safety stops	13 kg	21 kg	33 kg	40 kg	46 kg			
	With safety stops	11 kg	18 kg	29 kg	36 kg	41 kg			
Ø60	Without safety stops	12 kg	19 kg	28 kg	36 kg	42 kg	54 kg	68 kg	85 kg
	With safety stops	10 kg	15 kg	23 kg	30 kg	36 kg	47 kg	58 kg	73 kg
Ø70/80	Without safety stops	10 kg	15 kg	22 kg	27 kg	36 kg	47 kg	58 kg	73 kg
	With safety stops	7 kg	11 kg	17 kg	21 kg	31 kg	38 kg	48 kg	59 kg

* Roll/Modo RX: 30 Nm

TUBULAR MOTORS FOR ROLLING SHUTTERS

SELECTION TABLES

SERIES Ø45
PROFILE THICKNESS from 11 to 15 mm

ROLLING SHUTTER MAXIMUM HEIGHT 2500 mm									
Ø ROLLER		6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	32 Nm*	40 Nm	50 Nm
Ø50	Without safety stops	13 kg	21 kg	32 kg	42 kg	48 kg			
	With safety stops	10 kg	17 kg	27 kg	35 kg	42 kg			
Ø60	Without safety stops	11 kg	18 kg	27 kg	35 kg	44 kg	57 kg	71 kg	88 kg
	With safety stops	8 kg	14 kg	23 kg	30 kg	38 kg	47 kg	61 kg	75 kg
Ø70/80	Without safety stops	10 kg	15 kg	23 kg	30 kg	38 kg	48 kg	61 kg	75 kg
	With safety stops	7 kg	11 kg	18 kg	24 kg	31 kg	38 kg	51 kg	60 kg

ROLLING SHUTTER MAXIMUM HEIGHT 3500 mm									
Ø ROLLER		6 Nm	10 Nm	15 Nm	20 Nm	25 Nm	32 Nm*	40 Nm	50 Nm
Ø50	Without safety stops	11 kg	18 kg	27 kg	35 kg	40 kg			
	With safety stops	8 kg	14 kg	23 kg	30 kg	35 kg			
Ø60	Without safety stops	10 kg	15 kg	23 kg	30 kg	37 kg	48 kg	59 kg	73 kg
	With safety stops	7 kg	12 kg	19 kg	25 kg	32 kg	39 kg	51 kg	63 kg
Ø70/80	Without safety stops	8 kg	13 kg	19 kg	25 kg	32 kg	40 kg	50 kg	63 kg
	With safety stops	6 kg	9 kg	15 kg	20 kg	26 kg	32 kg	43 kg	50 kg

* Roll/Modo RX: 30 Nm

The friction safety coefficient has been taken into consideration in the tables. Tables are purely indicative, as variations can occur according to the installation conditions. Contact our technical service for more detailed information.

TUBULAR MOTORS FOR ROLLING SHUTTERS

Which motor meets my requirements?

SERIES Ø58

ROLLING SHUTTER MAXIMUM HEIGHT 2500 mm				
Ø ROLLER	65 Nm	85 Nm	100 Nm	120 Nm
Ø70	100 kg	125 kg	145 kg	170 kg
Ø90	85 kg	105 kg	125 kg	155 kg
Ø102	75 kg	95 kg	115 kg	130 kg
Ø133	50 kg	70 kg	80 kg	100 kg

ROLLING SHUTTER MAXIMUM HEIGHT 3500 mm				
Ø ROLLER	65 Nm	85 Nm	100 Nm	120 Nm
Ø70	85 kg	104 kg	121 kg	142 kg
Ø90	70 kg	88 kg	104 kg	129 kg
Ø102	65 kg	79 kg	96 kg	108 kg
Ø133	45 kg	58 kg	67 kg	83 kg

SELECTION TABLES FOR PLUG&PLAY OCEAN EASY AND PLUG&PLAY SAFE EASY MOTORS

SERIES Ø45
PROFILE THICKNESS up to 10 mm - With hard hangers

ROLLING SHUTTER MAXIMUM HEIGHT 1500 mm			
Ø ROLLER	6 Nm	10 Nm	20 Nm
Ø50	14 kg	24 kg	45 kg
Ø60	12 kg	20 kg	40 kg
Ø70	9 kg	15 kg	31 kg

ROLLING SHUTTER MAXIMUM HEIGHT 2500 mm			
Ø ROLLER	6 Nm	10 Nm	20 Nm
Ø50	13 kg	21 kg	40 kg
Ø60	11 kg	18 kg	35 kg
Ø70	8 kg	13 kg	27 kg

SERIES Ø45
PROFILE THICKNESS from 11 to 15 mm - With hard hangers

ROLLING SHUTTER MAXIMUM HEIGHT 1500 mm			
Ø ROLLER	6 Nm	10 Nm	20 Nm
Ø50	11 kg	19 kg	39 kg
Ø60	9 kg	16 kg	33 kg
Ø70	8 kg	13 kg	26 kg

ROLLING SHUTTER MAXIMUM HEIGHT 2500 mm			
Ø ROLLER	6 Nm	10 Nm	20 Nm
Ø50	10 kg	17 kg	34 kg
Ø60	8 kg	14 kg	29 kg
Ø70	7 kg	11 kg	23 kg

TUBULAR MOTORS FOR SCREENS AND MOSQUITO NETS



TUBULAR MOTORS FOR SCREENS AND MOSQUITO NETS

Which motor meets my requirements?

Cherubini offers you this practical guide in order to help you choose the right model of motor for the installation. In order to make the right choice, it is necessary to know some characteristics of the system to be motorized:

- WIND-UP ROLLER DIAMETER
A larger wind-up roller diameter requires a higher motor torque
- FABRIC WEIGHT PER SQUARE METER
- SURFACE
(width and height)
- BOTTOM RAIL WEIGHT

Having determined the above data, we have to look for the torque of the required motor in the selection tables.

Example:

- Fabric = 0,5 kg/m²
- Height = 5 m
- Width = 4 m
- Bottom rail = 4 kg
- Wind-up roller diameter = 78 mm

SURFACE = WIDTH x HEIGHT = 4x5 = 20 m²

SYSTEM WEIGHT = SURFACE x FABRIC WEIGHT = 20 m² x 0,5 kg/m² = 10 kg

TOTAL WEIGHT = SYSTEM WEIGHT + BOTTOM RAIL WEIGHT = 10 + 4 kg = 14 kg

SERIES Ø45

	6 Nm	7 Nm	10 Nm	15 Nm	20 Nm	25 Nm
Ø ROLLER	17 turns	30 turns	17 turns	17/30 turns	17 turns	17 turns
Ø50	18 kg	18 kg	30 kg	45 kg	57 kg	65 kg
Ø60	15 kg	15 kg	24 kg	40 kg	50 kg	57 kg
Ø70	-	-	21 kg	33 kg	42 kg	51 kg
Ø78	-	-	17 kg	27 kg	34 kg	45 kg

Tables are purely indicative, as variations can occur according to the installation conditions. Contact our technical service for more detailed information.

SELECTION TABLES

SERIES Ø35

	3 Nm	5 Nm	9 Nm
Ø ROLLER	30 turns	30/21 turns	16 turns
Ø40	11 kg	15 kg	28 kg
Ø50	7 kg	12 kg	23 kg
Ø60	-	9 kg	18 kg

SERIES Ø45

	6 Nm	7 Nm	10 Nm	15 Nm	20 Nm	25 Nm
Ø ROLLER	17 turns	30 turns	17 turns	17/30 turns	17 turns	17 turns
Ø50	18 kg	18 kg	30 kg	45 kg	57 kg	65 kg
Ø60	15 kg	15 kg	24 kg	40 kg	50 kg	57 kg
Ø70	-	-	21 kg	33 kg	42 kg	51 kg
Ø78	-	-	17 kg	27 kg	34 kg	45 kg

The friction safety coefficient has been taken into consideration in the tables. Tables are purely indicative, as variations can occur according to the installation conditions. Contact our technical service for more detailed information.

"We are always looking for more reliable and advanced solutions, designed to make people's daily lives more comfortable.

Products that are often hidden from view, transforming complex actions into simple gestures".

Massimo Viganò
Motor Design Department



TUBULAR MOTORS

guidelines for choosing a motor

p. 30

motors Ø 35

Wired - mechanical LS
Wired - electronic LS
Wired - electronic LS
With integrated radio - electronic LS
With integrated radio - electronic LS

ROLL
PLUG&PLAY PLUS
SENSO WIRE
TRONIC RX
SENSO RX

p. 32
p. 34
p. 36
p. 38
p. 40

motors Ø 45

Wired - mechanical LS
Wired - mechanical LS
Wired - mechanical LS
With integrated radio - mechanical LS
Wired, with manual override - mechanical LS
With integrated radio and manual override - mechanical LS
Wired - electronic LS
Wired - electronic LS
Wired, with manual override - electronic LS
Wired, with manual override - electronic LS
Wired - electronic LS
With radio - electronic LS
Wired - electronic LS
Wired - electronic LS
With integrated radio - electronic LS
With integrated radio - electronic LS
With integrated radio CRC_{RX} and Z-Wave- electronic LS
With integrated radio - electronic LS
With integrated radio - electronic LS
With integrated radio CRC_{RX} and Z-Wave- electronic LS
With integrated radio - electronic LS
With integrated radio - electronic LS
With integrated radio CRC_{RX} and Z-Wave- electronic LS

ROLL
MICRO
GARDA
GARDA RX
OCEAN
OCEAN RX
PLUG&PLAY PLUS
PLUG&PLAY
PLUG&PLAY OCEAN EASY
PLUG&PLAY SAFE EASY
PLUG&PLAY SHORT
PLUG&PLAY SHORT RX
WAVE WIRE
SENSO WIRE
MODO RX
TRONIC RX
OPEN ZRX
CLIMA PLUS RX
WAVE RX
ORA ZRX
WAVE LOCK RX
SENSO RX
REBIS ZRX

p. 42
p. 44
p. 46
p. 48
p. 50
p. 52
p. 54
p. 56
p. 58
p. 60
p. 62
p. 64
p. 66
p. 68
p. 70
p. 72
p. 74
p. 76
p. 78
p. 80
p. 82
p. 84
p. 86

motors Ø 58

Wired - mechanical LS
Wired, with manual override - mechanical LS
Wired - electronic LS
With integrated radio - electronic LS

GARDA
OCEAN
WAVE WIRE
TRONIC RX
CLIMA PLUS RX
WAVE RX
WAVE LOCK RX

p. 88
p. 90
p. 92
p. 94
p. 96
p. 98
p. 100

fast motors

p. 102

GUIDELINES FOR CHOOSING A MOTOR



		ELECTRONIC MOTOR WITH BUILT-IN RADIO										ELECTRONIC MOTOR WITH WIRE CONTROL					SHORT ELECTRONIC MOTOR		CONTROL UNITS*						MOTOR WITH MECHANICAL LIMIT SWITCH AND BUILT-IN RADIO		STANDARD MOTOR WITH MECHANICAL LIMIT SWITCH*						
		SENSO RX 35/45 mm	REBIS ZRX 45 mm	MODO RX 45 mm	TRONIC RX 35 mm	TRONIC RX 45/58 mm	OPEN ZRX 45 mm	CLIMA PLUS RX 45/58 mm	WAVE RX 45/58 mm	ORA ZRX 45 mm	WAVE LOCK RX 45/58 mm	PLUG&PLAY PLUS 35/45 mm	PLUG&PLAY 45 mm	WAVE WIRE 45/58 mm	SENSO WIRE 35/45 mm	PLUG&PLAY OCEAN EASY 45 mm	PLUG&PLAY SAFE EASY 45 mm	PLUG&PLAY SHORT 45 mm	PLUG&PLAY SHORT RX 45 mm	TDS COMPACT	TDS GOLD	TDS SILVER	OPTIME / COMPACT ROLL	MYROLL	MINI	GARDA RX 45 mm	OCEAN RX 45 mm	GARDA 45/58 mm	ROLL 35/45 mm	MICRO 45 mm	OCEAN 45/58 mm		
APPLICATION	Roller screen	•	•						•	•	•	•	•	•						•	•	•	•	•	•								
	Awnings								•	•	•		•	•						•	•	•			•	•						•	
	Pergola								•	•	•		•	•						•	•	•			•	•						•	
	Rolling shutters			•	•	•	•					•	•			•	•							•	•	•	•	•	•	•	•	•	•
	Adjustable shutters							•																									
REMOTE CONTROL		•	•	•	•	•	•	•	•	•										•	•		•	•	•	•	•						
Z-WAVE			•			•			•																								
WIRED SWITCH		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
BUTTON PROGRAMMING		•	•		•	•	•	•	•	•	•	•		•																			
OBSTACLE DETECTION WHEN ASCENDING		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•				•						
OBSTACLE DETECTION WHEN DESCENDING		Soft hangers																															
		Hard hangers			•	•	•	•				•	•								•	•											
RETURN / RELEASE ON OBSTACLE				•	•	•	•	•			•																						
RELEASE ON UPPER END STOP				•	•	•	•	•			•				•	•																	
SUPER-SENSITIVITY		•	•		•					○	○	○		○	•									•									
OPTIMIZED FABRIC TENSIONER		•	•						•	•	•																						
CLOSING FORCE ADJUSTMENT		•	•	•	•	•	•	•	•	•				•													•						
INTERMEDIATE POSITION		•	•	•	•	•	•	•	•	•										•			•										
AUTOMATIC COUPLING AND UNCOUPLING										•																							
BLIND ADJUSTMENT MANAGEMENT								•																									
CLIMATIC CONTROLS		•	•						•	•	•									•	•	•			•	•	•						
OVERRIDE DEVICE															•	•											•						•
REDUCED LENGTH																		•	•											•			
QUICK CONNECTION															•	•																	

See the "automation system compatibility table" (page 106) for the mechanical limit switch motor + control unit combinations

* See the "automation system compatibility table" (page 106) for the mechanical limit switch motor + control unit combinations.
 ○ Up to 25 Nm

ROLL Ø35

the motor ideal for screen and rolling shutters



Mechanical limit switch



Reliable and easy adjustment of the limit switches.
Fixed limit switch position.

Strength and safety

The star-shaped metallic reducer pin makes the motor highly reliable.



MOTOR WITH WIRE CONTROL

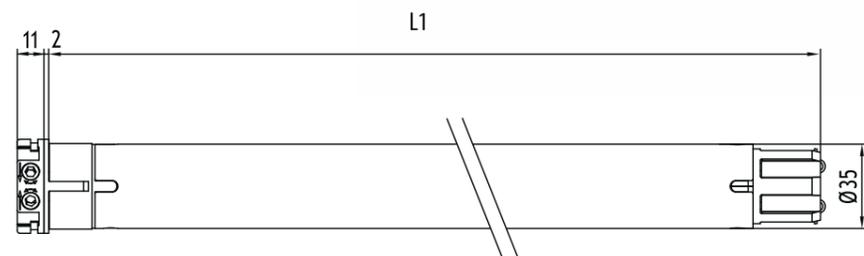

ROLL Ø35

MAIN CHARACTERISTICS


TECHNICAL FEATURES

Motor torque (Nm)	3	5	5	9
Speed (rpm)	30	30	21	16
Maximum turns	32	32	32	32
Power (W)	105	120	105	120
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Consumption (A)	0,40	0,50	0,40	0,50
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Weight (kg)	1,6	1,6	1,6	1,6
L1 (mm)	460	460	460	460

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

APPLICATION

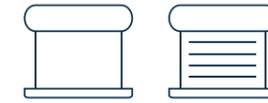

TECHNOLOGY



Code	Head	Torque	Speed
CMP35033000	Plastic material	3 Nm	30 rpm
CMP35053000	Plastic material	5 Nm	30 rpm
CMP35052100	Plastic material	5 Nm	21 rpm
CMP35091600	Plastic material	9 Nm	16 rpm

Certifications are available on the cherubini-group.com website

	3/30	5/30	5/21	9/16
Motor torque (Nm)	3	5	5	9
Speed (rpm)	30	30	21	16
Maximum turns	32	32	32	32
Power (W)	105	120	105	120
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Consumption (A)	0,40	0,50	0,40	0,50
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Weight (kg)	1,6	1,6	1,6	1,6
L1 (mm)	460	460	460	460



Skipper Senso

One-channel remote control with integrated light and temperature sensors. It enables the desired light and temperature levels to be maintained, in summer and winter.



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Compact Roll and OPTIME radio receivers

Small radio receivers. Compatible with the Cherubini remote controls.



Blue Bus

Allows the central command of different range of motors.

PLUG&PLAY PLUS Ø35

more than a motor, a system!



Electronic limit switch, wire control and encoder

This motor is recommended as drive system for interior and exterior "monobloc" shutters, roller blinds and screens.

Easy to install

Insert the motor into the tube, connect it to the power supply and it's ready.
When using mechanical stops no adjustment required.

Versatile

Without lockers components upwards or downwards, one or both limit switches may be set on the external button panel.

DEDICATED BUTTON PANEL NOT REQUIRED!



Protection against freezing

The motor will not operate if the guides and/or slats are frozen.

Specific functions

- Automatic or manual adjustment of the limit switch.
- Obstacle recognition either upwards or downwards, with drive inversion.
- May be connected either directly or in parallel.

MOTOR WITH WIRE CONTROL

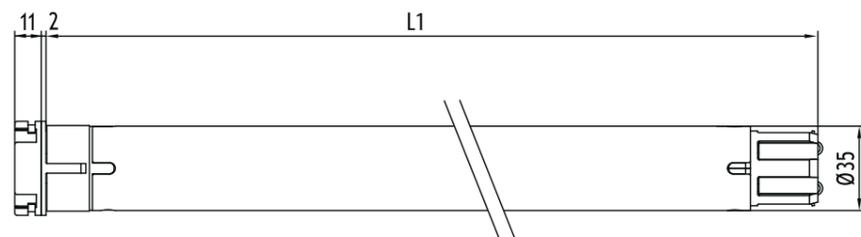

PLUG&PLAY PLUS Ø35

MAIN CHARACTERISTICS

TECHNICAL FEATURES


Motor torque (Nm)	5
Speed (rpm)	30
Power (W)	130
Power supply (V/Hz)	230/50
Consumption (A)	0,60
Cable 4 x 0,75 (m)	lg. 3
Operating time (min)	4
Protection degree	IP44
Weight (kg)	1,7
L1 (mm)	547

LOCKERS COMPONENTS

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

APPLICATION

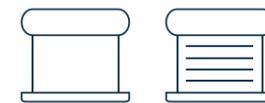

TECHNOLOGY




Code	Head	Torque	Speed
CEQ35053000	Plastic material	5 Nm	30 rpm
CEQ35091600	Plastic material	9 Nm	16 rpm

Certifications are available on the cherubini-group.com website

5/30	9/16
Motor torque (Nm)	5
Speed (rpm)	30
Power (W)	130
Power supply (V/Hz)	230/50
Consumption (A)	0,60
Cable 4 x 0,75 (m)	lg. 3
Operating time (min)	4
Protection degree	IP44
Weight (kg)	1,7
L1 (mm)	547

Accessories A and B are required for operation

A safety or end stops

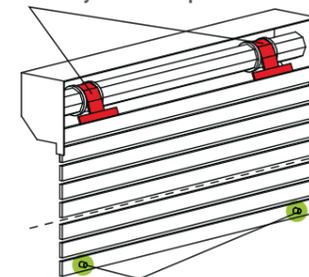

B visible or hidden stoppers



Blue Bus

Allows the central command of different range of motors.

SENSO WIRE

Ø35

ideal for screens and mosquito nets

Electronic limit switch, wire control and encoder
EASY TO INSTALL, EASY TO PROGRAM!

Adjustment of the limit switches through control panel

- No need to access the motor head.

DEDICATED BUTTON PANEL NOT REQUIRED!

Specific functions

- "Super-sensitivity" function on obstacle detection (downwards), setting on 3 levels possible.
- May be connected either directly or in parallel.



SENSO WIRE


Ø35

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	5
Speed (rpm)	30
Power (W)	130
Power supply (V/Hz)	230/50
Consumption (A)	0,60
Cable 4 x 0,75 (m)	lg. 3
Operating time (min)	4
Protection degree	IP44
Weight (kg)	1,7
L1 (mm)	547

APPLICATION



TECHNOLOGY





Code	Head	Torque	Speed
CEG35053000	Plastic material	5 Nm	30 rpm

Certifications are available on the cherubini-group.com website

5/30

5
30
130
230/50
0,60
lg. 3
4
IP44
1,7
547

MOTOR WITH WIRE CONTROL

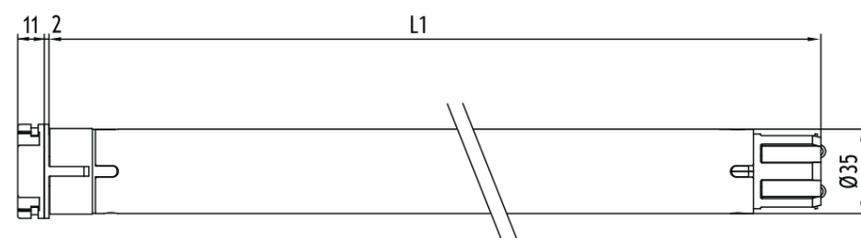

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



TDS Gold radio receiver

This receiver makes it possible to activate mechanical motors automatically.



Climatic controls WindTec WindTec SC

Wind and sun sensor (wireless, via radio receiver) and wind sensor (wired).



Blue Bus

Allows the central command of different range of motors.

TRONIC RX Ø35

designed for the application on french doors
with small cassette



Electronic limit switch with built-in receiver, wire and radio control

Simple and intuitive adjustment of the limit switches from the remote control.

The encoder technology makes it possible to keep the position set with optimum precision and reliability.

Safety and simplicity

High-safety coding system "Rolling Code".

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions



- Manual and semi-automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.

MOTOR WITH BUILT-IN RECEIVER

BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⚡

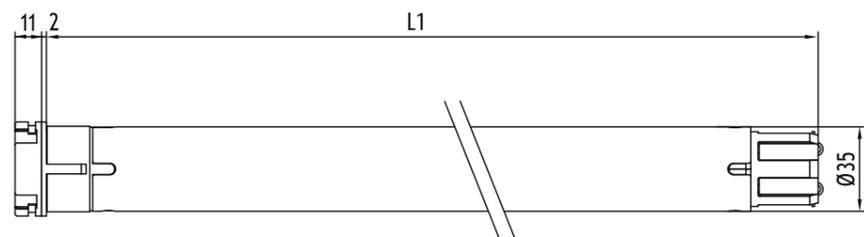

TRONIC RX Ø35

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	9
Speed (rpm)	16
Power (W)	130
Power supply (V/Hz)	230/50
Radio frequency (MHz)	433,92
Consumption (A)	0,60
Cable 4 x 0,75 (m)	lg. 2,5
Operating time (min)	4
Protection degree	IP44
Receiver storage capacity (No. Remote controls)	15
Weight (kg)	1,7
L1 (mm)	547

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CER35091600	Plastic material	9 Nm	16 rpm

Certifications are available on the cherubini-group.com website

9/16

9
16
130
230/50
433,92
0,60
lg. 2,5
4
IP44
15
1,7
547

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

Skipper Senso

One-channel remote control with integrated light and temperature sensors. It enables the desired light and temperature levels to be maintained, in summer and winter.



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

SENSO RX Ø35

ideal for screens and mosquito nets

Electronic limit switch with built-in receiver, wire and radio control

Simple and intuitive adjustment of the limit switches from the remote control.

The encoder technology makes it possible to keep the position set with optimum precision and reliability.

Safety and simplicity

High-safety coding system "Rolling Code".

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions

- "Super-sensitivity" function on obstacle detection (downwards) with drive inversion, set by remote control, setting on 3 levels possible, especially for screens and mosquito blinds.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.


Connection to WindTec and Rugiada climatic controls via radio.



SENSO RX Ø35

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CEA35033000	Plastic material	3 Nm	30 rpm
CEA35053000	Plastic material	5 Nm	30 rpm
CEA35091600	Plastic material	9 Nm	16 rpm



Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	3	5	9
Speed (rpm)	30	30	16
Power (W)	110	130	130
Power supply (V/Hz)	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92
Consumption (A)	0,50	0,60	0,60
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15
Weight (kg)	1,7	1,7	1,7
L1 (mm)	547	547	547

3/30	5/30	9/16
3	5	9
30	30	16
110	130	130
230/50	230/50	230/50
433,92	433,92	433,92
0,50	0,60	0,60
lg. 2,5	lg. 2,5	lg. 2,5
4	4	4
IP44	IP44	IP44
15	15	15
1,7	1,7	1,7
547	547	547

MOTOR WITH BUILT-IN RECEIVER

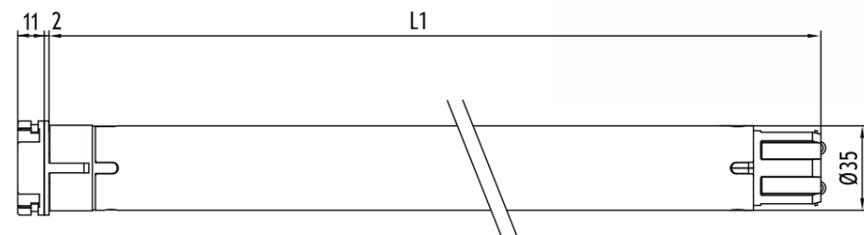

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

Skipper Senso

One-channel remote control with integrated light and temperature sensors. It enables the desired light and temperature levels to be maintained, in summer and winter.

Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.

Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

Climatic controls WindTec

Wind and sun/wind sensors with connection to the motor via radio (wireless).

ROLL Ø45

the ideal motor for motorising rolling shutters and screens



Mechanical limit switch



Reliable and easy adjustment of the limit switches.
Fixed limit switch position.

Strength and safety

The star-shaped technopolymer (10-30 Nm) or Zama (40-50 Nm) reducer pin makes the motor highly reliable.




MOTOR WITH WIRE CONTROL

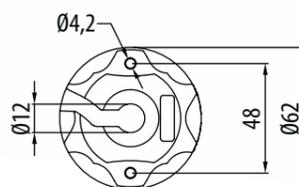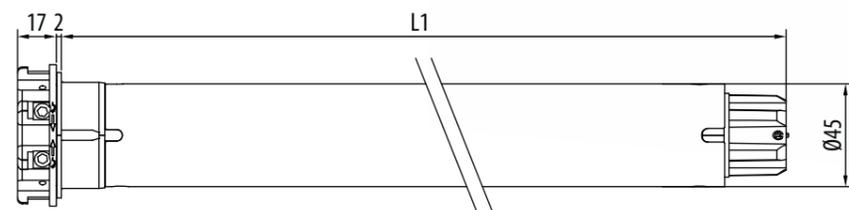

ROLL Ø45

MAIN CHARACTERISTICS

APPLICATION

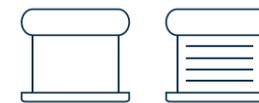

TECHNOLOGY



Code	Head	Torque	Speed
CMP45101700	Plastic material	10 Nm	17 rpm
CMP45201700	Plastic material	20 Nm	17 rpm
CMP45301700	Plastic material	30 Nm	17 rpm
CMP45401700	Plastic material	40 Nm	17 rpm
CMP45501200	Plastic material	50 Nm	12 rpm
CMP45073000	Plastic material	7 Nm	30 rpm
CMP45153000	Plastic material	15 Nm	30 rpm

Certifications are available on the cherubini-group.com website

This motor is compatible with the fastening system **OPTime**

TECHNICAL FEATURES

	10/17	20/17	30/17	40/17	50/12	7/30	15/30
Motor torque (Nm)	10	20	30	40	50	7	15
Speed (rpm)	17	17	17	17	12	30	30
Maximum turns*	25	25	25	25	25	37	37
Power (W)	135	195	250	275	275	170	240
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Consumption (A)	0,60	0,85	1,10	1,25	1,25	0,80	1,10
Cable** 4 x 0,75 (m)	lg. 2,5						
Operating time (min)	4	4	4	4	4	4	4
Protection degree	IP44						
Weight (kg)	2,3	2,5	3,0	3,0	3,0	2,5	3,0
L1 (mm)	496	546	546	546	546	546	546

*Upon request, available with 37 turns before stop.
**Possibility of cable with Hirschmann STAS 3.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Compact Roll and OPTime radio receivers

Small radio receivers. Compatible with the Cherubini remote controls.



Blue Bus

Allows the central command of different range of motors.

MICRO Ø45

ideal for limited spaces

Mechanical limit switch

Reliable and easy adjustment of the limit switches.



Strength and safety

The star-shaped technopolymer reducer pin makes the motor highly reliable.

SMALL MOTOR (44 cm)



MOTOR WITH WIRE CONTROL

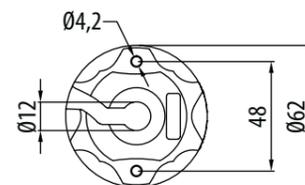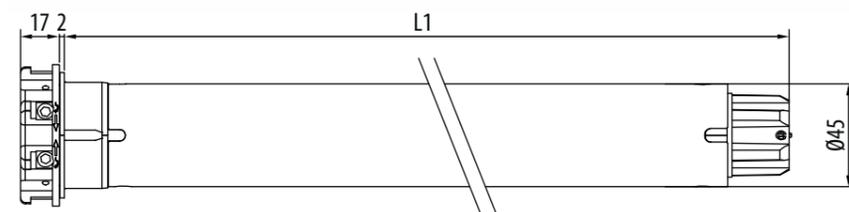

MICRO Ø45

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	10
Speed (rpm)	17
Maximum turns	25
Power (W)	135
Power supply (V/Hz)	230/50
Consumption (A)	0,60
Cable 4 x 0,75 (m)	lg. 2,5
Operating time (min)	4
Protection degree	IP44
Weight (kg)	1,9
L1 (mm)	421

APPLICATION



Code	Head	Torque	Speed
CMC45101700	Plastic material	10 Nm	17 rpm

Certifications are available on the cherubini-group.com website

This motor is compatible with the fastening system **OPTime**

10/17

10
17
25
135
230/50
0,60
lg. 2,5
4
IP44
1,9
421

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Compact Roll and OPTime radio receivers

Small radio receivers. Compatible with the Cherubini remote controls.



Blue Bus

Allows the central command of different range of motors.

GARDA Ø45



Mechanical limit switch

Reliable and easy adjustment of the limit switches.

Attachment without brackets



Thanks to the metallic head, the motor can be fastened directly to the bracket without needing additional supports.

Strength and safety

The star-shaped metallic reducer pin makes the motor highly reliable.



MOTOR WITH WIRE CONTROL

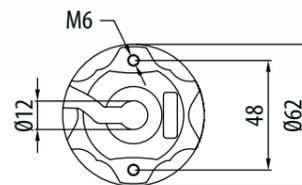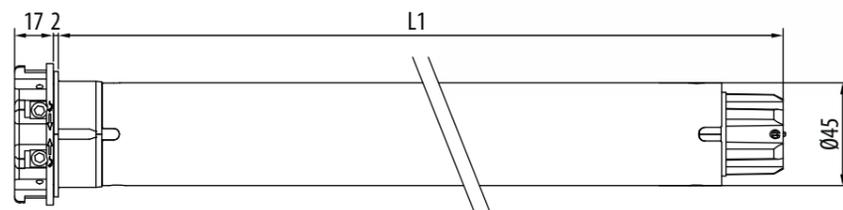

GARDA Ø45

APPLICATION



MAIN CHARACTERISTICS

Code	Head	Torque	Speed
CME45101700	Zama	10 Nm	17 rpm
CME45151700	Zama	15 Nm	17 rpm
CME45251700	Zama	25 Nm	17 rpm
CME45321700	Zama	32 Nm	17 rpm
CME45401700	Zama	40 Nm	17 rpm
CME45501200	Zama	50 Nm	12 rpm
CME45400400	Zama	40 Nm	4 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	10/17	15/17	25/17	32/17	40/17	50/12	40/4
Motor torque (Nm)	10	15	25	32	40	50	40
Speed (rpm)	17	17	17	17	17	12	4
Maximum turns*	25	25	25	25	25	25	25
Power (W)	150	170	225	250	275	275	215
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Consumption (A)	0,70	0,80	1,00	1,10	1,25	1,25	0,90
Cable** 4 x 0,75 (m)	lg. 2,5						
Operating time (min)	4	4	4	4	4	4	4
Protection degree	IP44						
Weight (kg)	2,7	2,7	3,0	3,0	3,0	3,0	3,2
L1 (mm)	546	546	546	546	546	546	587

*Upon request, available with 37 turns before stop.

** Possibility of cable with Hirschmann STAS 3.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.

Radio receivers for awnings

These receivers make it possible to activate mechanical motors automatically.

Radio receivers for rolling shutters

Small radio receivers. Compatible with the Cherubini remote controls.

Climatic controls WindTec WindTec SC

Wind and sun sensor (wireless, via radio receiver) and wind sensor (wired).

GARDA RX Ø45



GARDA RX Ø45

APPLICATION



TECHNOLOGY



Mechanical limit switch with in-built receiver

Reliable and easy adjustment of the limit switches.

Attachment without brackets

Thanks to the metallic head, the motor can be fastened directly to the bracket without needing additional supports.

Strength and safety

The star-shaped metallic reducer pin makes the motor highly reliable.

Safety and simplicity

High-safety coding system "Rolling Code". Easy programming and operation: the motor confirms all the steps by means of small rotations.

Optional connections

Wired switch.

Connection to WindTec, Mistral and Rugiada climatic controls via radio.



MAIN CHARACTERISTICS


Code	Head	Torque	Speed
CMT45101700	Zama	10 Nm	17 rpm
CMT45151700	Zama	15 Nm	17 rpm
CMT45251700	Zama	25 Nm	17 rpm
CMT45321700	Zama	32 Nm	17 rpm
CMT45401700	Zama	40 Nm	17 rpm
CMT45501200	Zama	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website



TECHNICAL FEATURES

	10/17	15/17	25/17	32/17	40/17	50/12
Motor torque (Nm)	10	15	25	32	40	50
Speed (rpm)	17	17	17	17	17	12
Maximum turns	25	25	25	25	25	25
Power (W)	150	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,70	0,80	1,00	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 2,5					
Operating time (min)	4	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15
Weight (kg)	3,2	3,2	3,6	3,6	3,6	3,6
L1 (mm)	646	646	646	646	646	646

MOTOR WITH BUILT-IN RECEIVER



BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⊕

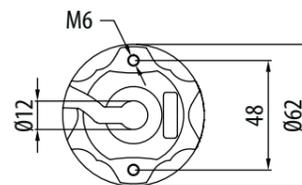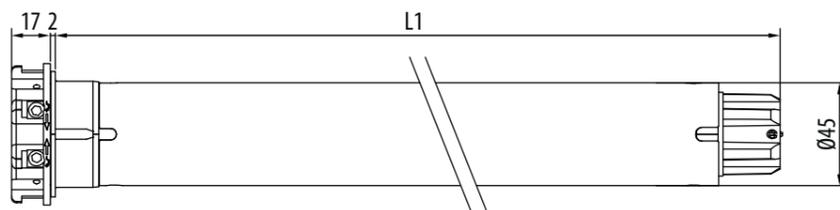

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

OCEAN Ø45



Mechanical limit switch

Reliable and easy adjustment of the limit switches.
Double access to the adjusting screws.

Compact override

Thanks to its small size, this device can be installed in limited spaces.
The reduction ratio is 1:24.

Attachment without brackets




Thanks to the metallic head, the motor can be fastened directly to the bracket without needing additional supports.

Strength and safety

The star-shaped metallic reducer pin makes the motor highly reliable.



MOTOR WITH WIRE CONTROL AND OVERRIDE

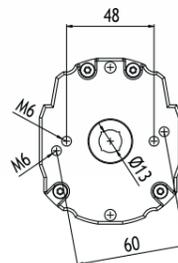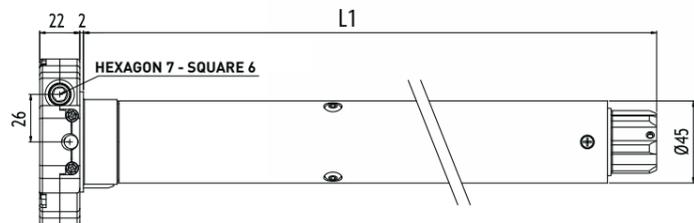

OCEAN Ø45

MAIN CHARACTERISTICS

APPLICATION



Code	Head	Torque	Speed
CMS45151700	Zama	15 Nm	17 rpm
CMS45251700	Zama	25 Nm	17 rpm
CMS45321700	Zama	32 Nm	17 rpm
CMS45401700	Zama	40 Nm	17 rpm
CMS45501200	Zama	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	15/17	25/17	32/17	40/17	50/12
Motor torque (Nm)	15	25	32	40	50
Speed (rpm)	17	17	17	17	12
Maximum turns	32	32	32	32	32
Power (W)	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Consumption (A)	0,80	1,00	1,10	1,25	1,25
Cable* 4 x 0,75 (m)	lg. 2,5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Weight (kg)	3,7	4,0	4,0	4,0	4,0
L1 (mm)	646	646	646	646	646

* Possibility of cable with Hirschmann STAS 3.

ACCESSORIES FOR MANUAL OPERATION

For a complete list see "Accessories for manual operation" on page 158



Foldable crank
with hook length 150 cm
Ref. 7463 150G 2101



Operating crank
lg. 150 cm
Ref. 9100 150L CH02



Eye with hexagon
7 x 86 mm
Ref. 6010 7008 CH16

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

AUTOMATION OF THE MOTOR WITH MANUAL OVERRIDE DEVICE

Ocean combined with TDS Compact and Compact Roll radio receivers becomes a radio controlled motor and takes on new functions.

Moving the override, the end positions remain unchanged.



OCEAN + TDS Compact

- Obstacle recognition during closing.
- Closing force adjustment on 3 levels possible.
- First intermediate position programmable from the remote control.
- Second intermediate position programmable from the remote control and controlled by the WindTec Lux light sensor.



OCEAN + Compact ROLL

- Obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Two intermediate positions that are programmable and usable from the remote control.

OCEAN RX Ø45



Mechanical limit switch

Built-in radio receiver et override device

The reduction ratio is 1:24.

Safety and simplicity

High-safety coding system "Rolling Code".

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions

- Precise adjustment for cassette awnings: the mechanical stop and regulation of the closing force enable the perfect awning closure, avoiding the danger of excessive pull on the fabric.
- Obstacle detection upwards, sensitivity setting on 3 levels possible via remote control.
- Direct fixing to the bracket without using supports.


Optional connections

Wired switch.




Connection to WindTec, Mistral and Rugiada climatic controls via radio.



MOTOR WITH BUILT-IN RECEIVER AND OVERRIDE DEVICE



BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⚡

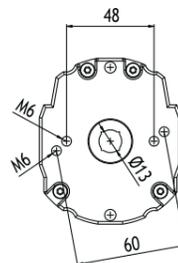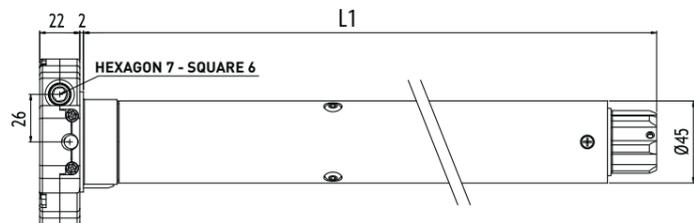

OCEAN RX Ø45

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CMX45321700	Zama	32 Nm	17 rpm
CMX45401700	Zama	40 Nm	17 rpm
CMX45501200	Zama	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	32	40	50
Speed (rpm)	17	17	12
Maximum turns	32	32	32
Power (W)	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50
Consumption (A)	1,10	1,25	1,25
Cable* 4 x 0,75 (m)	lg. 3	lg. 3	lg. 3
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15
Weight (kg)	4,2	4,2	4,2
L1 (mm)	725	725	725

32/17	40/17	50/12
32	40	50
17	17	12
32	32	32
250	275	275
230/50	230/50	230/50
1,10	1,25	1,25
lg. 3	lg. 3	lg. 3
4	4	4
IP44	IP44	IP44
15	15	15
4,2	4,2	4,2
725	725	725

* Possibility of cable with Hirschmann STAS 3.

ACCESSORIES FOR MANUAL OPERATION

For a complete list see "Accessories for manual operation" on page 158



Foldable crank
with hook length 150 cm
Ref. 7463 150G 2101



Operating crank
lg. 150 cm
Ref. 9100 150L CH02



Eye with hexagon
7 x 86 mm
Ref. 6010 7008 CH16

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

PLUG&PLAY PLUS Ø45

more than a motor, a system!

Electronic limit switch, wire control and encoder

This motor is recommended as drive system for interior and exterior "monobloc" shutters, roller blinds and screens.

Easy to install

Insert the motor into the tube, connect it to the power supply and it's ready.

When using mechanical stops no adjustment required.

Versatile

Without lockers components upwards or downwards, one or both limit switches may be set on the external button panel.

DEDICATED BUTTON PANEL NOT REQUIRED!



Protection against freezing

The motor will not operate if the guides and/or slats are frozen.

Specific functions

- Automatic or manual adjustment of the limit switch.
- Upwards and downwards obstacle detection with stop and reverse relaxation movement.
- Periodic relaxation movement on stop.
- May be connected either directly or in parallel.


MOTOR WITH WIRE CONTROL

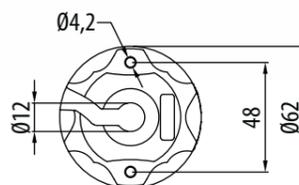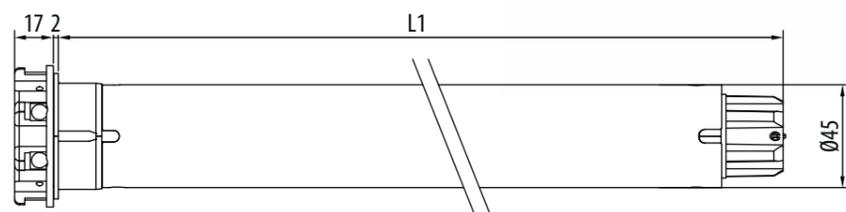

PLUG&PLAY PLUS Ø45

MAIN CHARACTERISTICS

APPLICATION

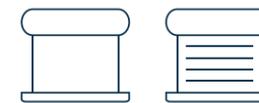

Code	Head	Torque	Speed
CEQ45061700	Plastic material	6 Nm	17 rpm
CEQ45101700	Plastic material	10 Nm	17 rpm
CEQ45151700	Plastic material	15 Nm	17 rpm
CEQ45251700	Plastic material	25 Nm	17 rpm
CEQ45321700	Plastic material	32 Nm	17 rpm
CEQ45401700	Plastic material	40 Nm	17 rpm
CEQ45501200	Plastic material	50 Nm	12 rpm


Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	6/17	10/17	15/17	25/17	32/17	40/17	50/12
Motor torque (Nm)	6	10	15	25	32	40	50
Speed (rpm)	17	17	17	17	17	17	12
Power (W)	110	135	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Consumption (A)	0,50	0,60	0,80	1,00	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 3						
Operating time (min)	4	4	4	4	4	4	4
Protection degree	IP44						
Weight (kg)	2,3	2,5	2,5	3,2	3,2	3,2	3,2
L1 (mm)	546	546	546	586	586	586	586

LOCKERS COMPONENTS

A and **B** accessories are required for automatic limit switch adjustment.

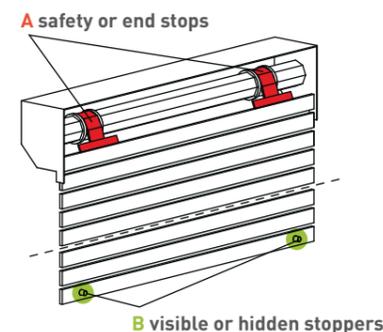

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Blue Bus

Allows the central command of different range of motors.

PLUG&PLAY Ø45

more than a motor, a system!



Electronic limit switch with wired control

This motor is recommended as drive system for interior and exterior "monobloc" shutters.

Easy to install

Insert the motor into the tube, connect it to the power supply and it's ready.

NO ADJUSTMENT REQUIRED.



Self-learning

Limit switches are optimized owing to the constant torque metering for the entire path the blinds take.

Specific functions

- Automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions.
- May be connected either directly or in parallel.
- Periodic relaxation movement on stop.
- Upwards and downwards obstacle detection with stop and reverse relaxation movement.

MOTOR WITH WIRE CONTROL

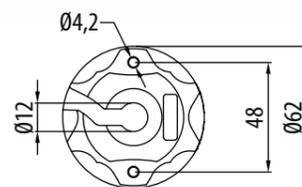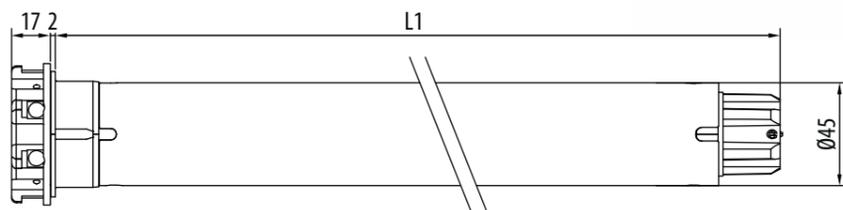

PLUG&PLAY Ø45

MAIN CHARACTERISTICS

APPLICATION



Code	Head	Torque	Speed
CEP45061700	Plastic material	6 Nm	17 rpm
CEP45101700	Plastic material	10 Nm	17 rpm
CEP45151700	Plastic material	15 Nm	17 rpm
CEP45251700	Plastic material	25 Nm	17 rpm

Certifications are available on the cherubini-group.com website
For higher motor torque ratings see Plug&Play Plus page 54


TECHNICAL FEATURES

	6/17	10/17	15/17	25/17
Motor torque (Nm)	6	10	15	25
Speed (rpm)	17	17	17	17
Power (W)	110	135	170	225
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Consumption (A)	0,50	0,60	0,80	1,00
Cable 4 x 0,75 (m)	lg. 3	lg. 3	lg. 3	lg. 3
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Weight (kg)	2,3	2,4	2,5	3,2
L1 (mm)	473	488	503	543

LOCKERS COMPONENTS

Accessories **A** and **B** are required for operation

A safety or end stops

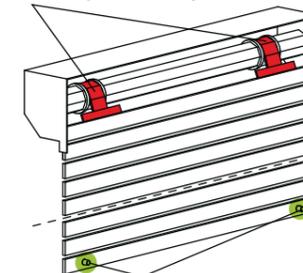

B visible or hidden stoppers

Installation is very simple: once the motor is installed into the tube it adjusts itself automatically.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Blue Bus

Allows the central command of different range of motors.

PLUG&PLAY OCEAN EASY Ø45

compact, strong, automatic!



Electronic limit switch and override device

Suitable for installation on rolling shutters with both stiff and stoppers on the last slat.

Compact override

The reduction ratio is 1:18.

Easy to install

Insert the motor into the tube, connect it to the power supply and it's ready.




NO ADJUSTMENT REQUIRED.

Specific functions

- Automatic adjustment of the limit switches.
- Limit switch self-learning feature after manual adjustment with manual override.
- Protection against freezing and obstacle detection on both directions.
- May be connected either directly or in parallel.



MOTOR WITH WIRE CONTROL AND OVERRIDE

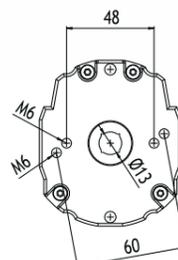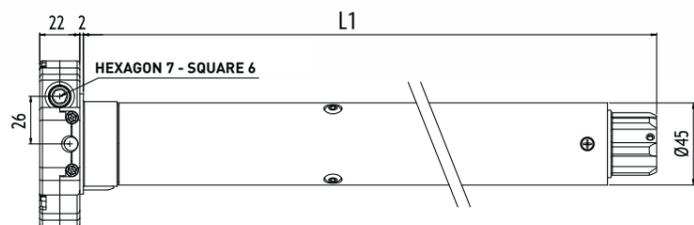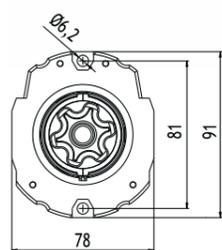

PLUG&PLAY OCEAN EASY Ø45

APPLICATION



MAIN CHARACTERISTICS

Code	Head	Torque	Speed
CEN45101700	Zama	10 Nm	17 rpm
CEN45201700	Zama	20 Nm	17 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	10	20
Speed (rpm)	17	17
Power (W)	150	170
Power supply (V/Hz)	230/50	230/50
Consumption (A)	0,70	0,80
Cable* 4 x 0,75	lg. 14 cm (connector included)	lg. 14 cm (connector included)
Operating time (min)	4	4
Protection degree	IP44	IP44
Weight (kg)	3,5	3,5
L1 (mm)	646	646

10/17

20/17

Motor torque (Nm)	10	20
Speed (rpm)	17	17
Power (W)	150	170
Power supply (V/Hz)	230/50	230/50
Consumption (A)	0,70	0,80
Cable* 4 x 0,75	lg. 14 cm (connector included)	lg. 14 cm (connector included)
Operating time (min)	4	4
Protection degree	IP44	IP44
Weight (kg)	3,5	3,5
L1 (mm)	646	646

*Black neoprene cable provided separately from the motor.

Choose the suitable length for the cable.

A4503_0J02 Length 1 m

A4503_0D67 Length 5 m

A4503_0J03 Length 2 m

A4503_0D68 Length 10 m


A4503_0D66 Length 3 m

LOCKERS COMPONENTS

ACCESSORIES FOR MANUAL OPERATION

For a complete list see "Accessories for manual operation" on page 158

A safety or end stops

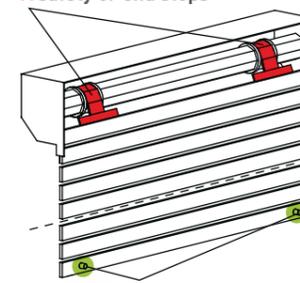

Accessories A and B are required for operation

B visible or hidden stoppers



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



OPTime radio receiver

Quick coupling small radio receiver. Compatible with the Cherubini remote controls.



Blue Bus

Allows the central command of different range of motors.

PLUG&PLAY SAFE EASY Ø45

Compact motor for second escape routes



Electronic limit switch and override device

Can only be installed on shutters fitted with both stiff and stoppers on the last slat.

Compact override

Thanks to its small size, this device can be installed in limited spaces.

The reduction ratio is 1:15.

Easy to install

Easy installation by inserting the motor into the tube and connecting the connector.


Specific functions

- Automatic adjustment of the limit switches.
- Limit switch self-learning feature after manual adjustment with manual override.
- Protection against freezing and obstacle detection on both directions.
- May be connected either directly or in parallel.

Easy connector with black neoprene cable

For maximum installation speed on-site.

MOTOR WITH WIRE CONTROL AND OVERRIDE

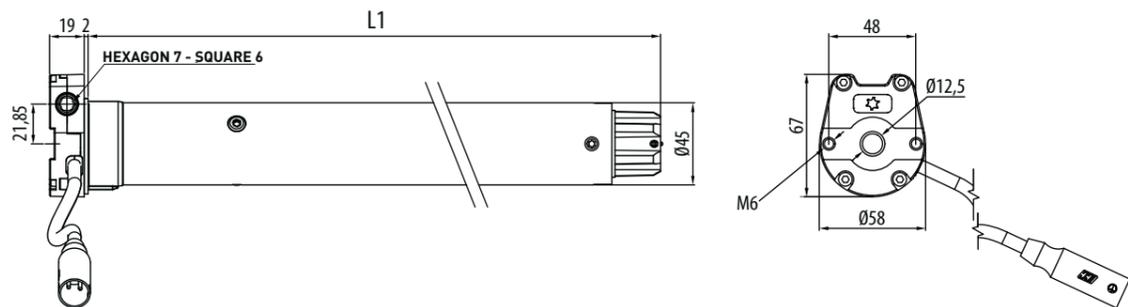

PLUG&PLAY SAFE EASY Ø45

MAIN CHARACTERISTICS

APPLICATION



Code	Head	Torque	Speed
CEK45061700	Zama	6 Nm	17 rpm
CEK45101700	Zama	10 Nm	17 rpm
CEK45151700	Zama	15 Nm	17 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	6/17	10/17	15/17
Motor torque (Nm)	6	10	15
Speed (rpm)	17	17	17
Power (W)	110	135	170
Power supply (V/Hz)	230/50	230/50	230/50
Consumption (A)	0,50	0,60	0,80
Cable* 4 x 0,75	lg. 20 cm (connector included)	lg. 20 cm (connector included)	lg. 20 cm (connector included)
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Weight (kg)	2,5	2,6	2,8
L1 (mm)	531	546	561

*Black neoprene cable provided separately from the motor.

Choose the suitable length for the cable.

A4503_OJ02 Length 1 m
A4503_OJ03 Length 2 m
A4503_OD66 Length 3 m


A4503_OD67 Length 5 m
A4503_OD68 Length 10 m

LOCKERS COMPONENTS

ACCESSORIES FOR MANUAL OPERATION

For a complete list see "Accessories for manual operation" on page 158

A safety or end stops

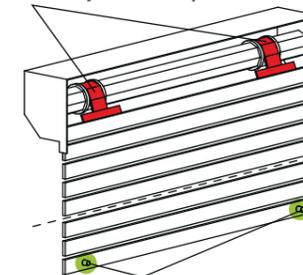

Accessories A and B are required for operation

B visible or hidden stoppers



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



OPTime radio receiver

Quick coupling small radio receiver. Compatible with the Cherubini remote controls.



Blue Bus

Allows the central command of different range of motors.

PLUG&PLAY SHORT Ø45

all of the plug&play functions in just 36 cm!



Electronic limit switch with wired control

This motor is recommended as drive system for interior and exterior "monobloc" shutters.

Easy to install

Insert the motor into the tube, connect it to the power supply and it's ready.


NO ADJUSTMENT REQUIRED.

Specific functions

- Automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions.
- May be connected either directly or in parallel.



MOTOR WITH WIRE CONTROL

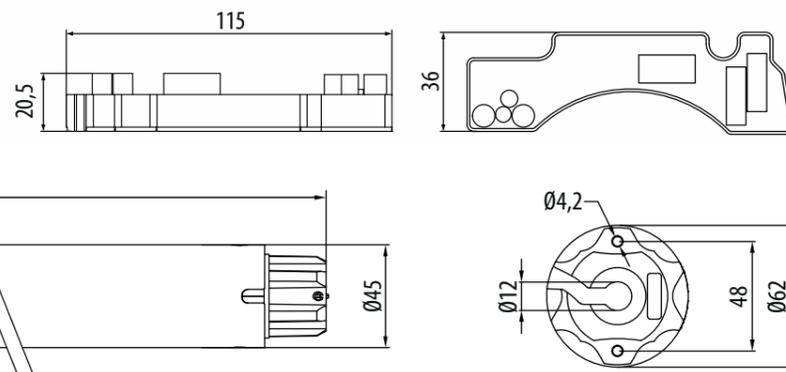

PLUG&PLAY SHORT Ø45

MAIN CHARACTERISTICS

APPLICATION



Code	Head	Torque	Speed
CES45061700	Plastic material	6 Nm	17 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	6
Speed (rpm)	17
Power (W)	110
Power supply (V/Hz)	230/50
Consumption (A)	0,50
Cable 4 x 0,75 (m)	lg. 2,6
Operating time (min)	4
Protection degree	IP44
Weight (kg)	1,7*
L1 (mm)	343

6/17


6
17
110
230/50
0,50
lg. 2,6
4
IP44
1,7*
343

* Including the control unit

LOCKERS COMPONENTS

Accessories **A** and **B** are required for operation

A safety or end stops

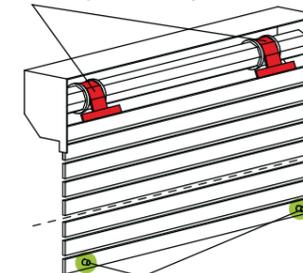

B visible or hidden stoppers

Installation is very simple: once the motor is installed into the tube it adjusts itself automatically.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Blue Bus

Allows the central command of different range of motors.

PLUG&PLAY SHORT RX Ø45

all of the plug&play functions,
plus radio-control, in just 36 cm!



Electronic limit switch with radio and wired control

This motor is recommended as drive system for interior and exterior "monobloc" shutters.

Easy to install


Insert the motor into the tube, connect it to the power supply and it's ready.

Optional connections


Wired switch.

Specific functions

- Automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, with drive inversion.
- Possibility to memorise 2 intermediate positions; They can be activated by remote control.
- With closing force adjustment.
- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, to avoid the complete stack of slats.

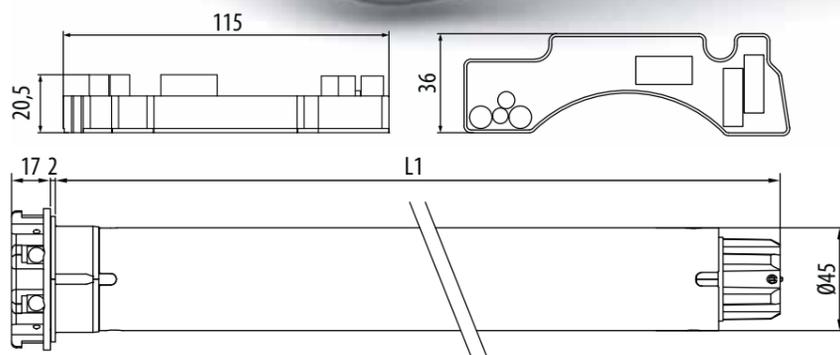

MOTOR WITH RADIO RECEIVER

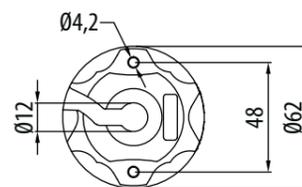

PLUG&PLAY SHORT RX Ø45

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	6
Speed (rpm)	17
Power (W)	110
Power supply (V/Hz)	230/50
Radio frequency (MHz)	433,92
Consumption (A)	0,50
Cable 4 x 0,75 (m)	lg. 2,6
Operating time (min)	4
Protection degree	IP44
Receiver storage capacity (No. Remote controls)	15
Weight (kg)	1,7*
L1 (mm)	343

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CEX45061700	Plastic material	6 Nm	17 rpm

Certifications are available on the cherubini-group.com website

6/17


6
17
110
230/50
433,92
0,50
lg. 2,6
4
IP44
15
1,7*
343

* Including the control unit

LOCKERS COMPONENTS

Accessories **A** and **B** are required for operation

A safety or end stops

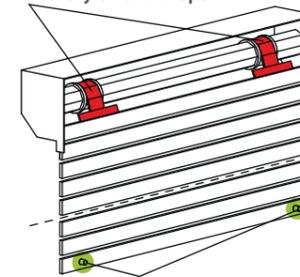

B visible or hidden stoppers

Installation is very simple: once the motor is installed into the tube it adjusts itself automatically.



Skipper Senso

One-channel remote control with integrated light and temperature sensors. It enables the desired light and temperature levels to be maintained, in summer and winter.



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

WAVE WIRE Ø45

the plug&play for awnings

Electronic limit switch, wire control and encoder
EASY TO INSTALL, EASY TO PROGRAM!

Adjustment of the limit switches through control panel

No need to access the motor head.

DEDICATED BUTTON PANEL NOT REQUIRED!

Specific functions




- "Super-sensitivity" function on obstacle detection (downwards), setting on 3 levels possible (only for 15 Nm).
- With cassette awnings, the motor allows the automatic setting of the closing limit switch (from 32 Nm).
- For other types of awnings it's possible to set both limit switches manually, through simple sequences on the control panel.
- May be connected either directly or in parallel.



MOTOR WITH WIRE CONTROL



BROWN - ROTATION R1
BLACK - ROTATION R2
BLUE - NEUTRAL
YELLOW - GREEN ⊕

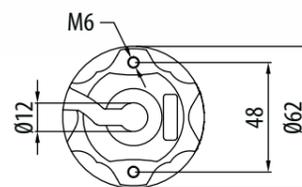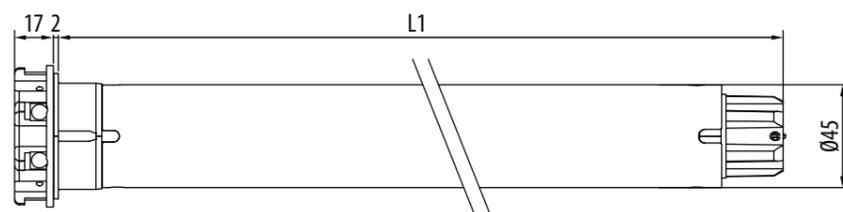

WAVE WIRE Ø45

MAIN CHARACTERISTICS

APPLICATION



Code	Head	Torque	Speed
CEW45151700	Zama	15 Nm	17 rpm
CEW45321700	Zama	32 Nm	17 rpm
CEW45401700	Zama	40 Nm	17 rpm
CEW45501200	Zama	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	15/17	32/17	40/17	50/12
Motor torque (Nm)	15	32	40	50
Speed (rpm)	17	17	17	12
Power (W)	170	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Consumption (A)	0,80	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 3	lg. 3	lg. 3	lg. 3
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Weight (kg)	3,0	3,4	3,4	3,4
L1 (mm)	503	543	543	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



TDS Gold radio receiver

This receiver makes it possible to activate mechanical motors automatically.



Climatic controls WindTec WindTec SC

Wind and sun sensor (wireless, via radio receiver) and wind sensor (wired).



Blue Bus

Allows the central command of different range of motors.

SENSO WIRE

Ø45

ideal for screens and mosquito nets

Electronic limit switch, wire control and encoder
EASY TO INSTALL, EASY TO PROGRAM!

Adjustment of the limit switches through control panel

No need to access the motor head.



DEDICATED BUTTON PANEL NOT REQUIRED!

Specific functions

- "Super-sensitivity" function on obstacle detection (downwards), setting on 3 levels possible.
- May be connected either directly or in parallel.



MOTOR WITH WIRE CONTROL

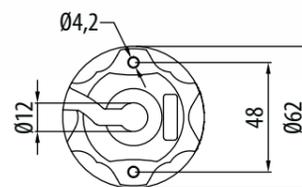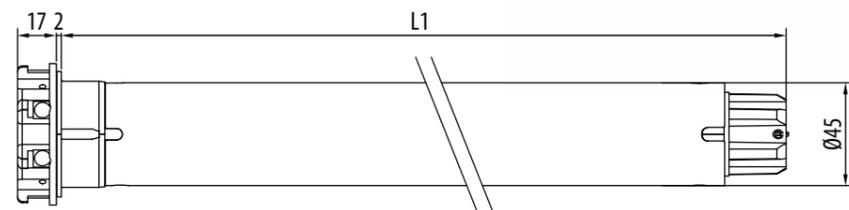

SENSO WIRE


Ø45

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	10	15	25	7	15
Speed (rpm)	17	17	17	30	30
Power (W)	135	170	225	170	225
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Consumption (A)	0,60	0,80	1,00	0,80	1,00
Cable 4 x 0,75 (m)	lg. 3				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Weight (kg)	2,4	2,5	3,2	2,5	3,2
L1 (mm)	488	503	543	503	543

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CEG45101700	Plastic material	10 Nm	17 rpm
CEG45151700	Plastic material	15 Nm	17 rpm
CEG45251700	Plastic material	25 Nm	17 rpm
CEG45073000	Plastic material	7 Nm	30 rpm
CEG45153000	Plastic material	15 Nm	30 rpm

Certifications are available on the cherubini-group.com website

	10/17	15/17	25/17	7/30	15/30
Motor torque (Nm)	10	15	25	7	15
Speed (rpm)	17	17	17	30	30
Power (W)	135	170	225	170	225
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Consumption (A)	0,60	0,80	1,00	0,80	1,00
Cable 4 x 0,75 (m)	lg. 3				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Weight (kg)	2,4	2,5	3,2	2,5	3,2
L1 (mm)	488	503	543	503	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



TDS Gold radio receiver

This receiver makes it possible to activate mechanical motors automatically.



Climatic controls WindTec WindTec SC

Wind and sun sensor (wireless, via radio receiver) and wind sensor (wired).



Blue Bus

Allows the central command of different range of motors.

MODO RX Ø45

the solution for every type of rolling shutter



Electronic limit switch with built-in receiver, wire and radio control

Simple and intuitive adjustment of the limit switches from the remote control.

The encoder technology makes it possible to keep the position set with optimum precision and reliability.

Safety and simplicity

High-safety coding system "Rolling Code".

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions




- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorising an intermediate position.

Optional connections

Wired switch.



MOTOR WITH BUILT-IN RECEIVER

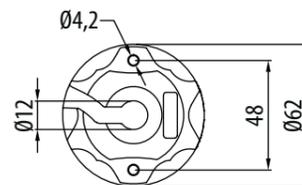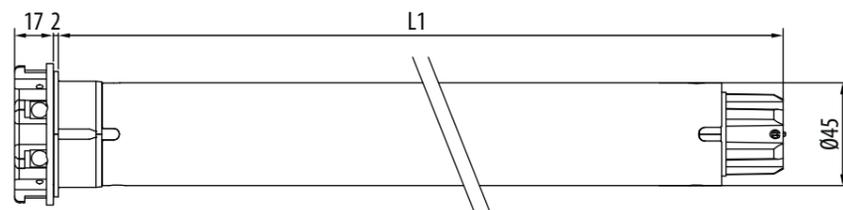

MODO RX Ø45

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CE045101700	Plastic material	10 Nm	17 rpm
CE045201700	Plastic material	20 Nm	17 rpm
CE045301700	Plastic material	30 Nm	17 rpm
CE045401700	Plastic material	40 Nm	17 rpm
CE045501200	Plastic material	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	10/17	20/17	30/17	40/17	50/12
Motor torque (Nm)	10	20	30	40	50
Speed (rpm)	17	17	17	17	12
Power (W)	135	195	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,85	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 2,5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15
Weight (kg)	2,3	2,3	3,2	3,2	3,2
L1 (mm)	546	546	586	586	586

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

Skipper Senso

One-channel remote control with integrated light and temperature sensors. It enables the desired light and temperature levels to be maintained, in summer and winter.

Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.

Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

TRONIC RX Ø45

safety and comfort



Electronic limit switch with built-in receiver, wire and radio control

Simple and intuitive adjustment of the limit switches from the remote control.

The encoder technology makes it possible to keep the position set with optimum precision and reliability.

Safety and simplicity

High-safety coding system "Rolling Code".

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions




- Manual and semi-automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.



MOTOR WITH BUILT-IN RECEIVER

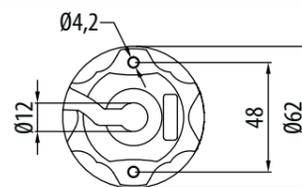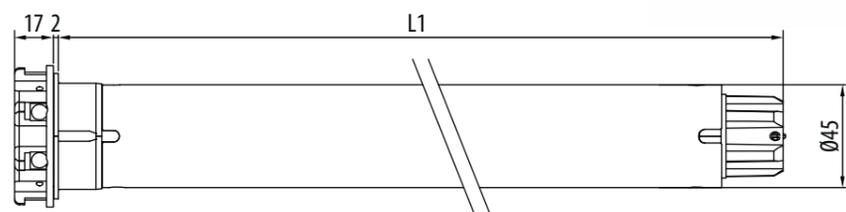

TRONIC RX Ø45

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)						
Speed (rpm)						
Power (W)						
Power supply (V/Hz)						
Radio frequency (MHz)						
Consumption (A)						
Cable 4 x 0,75 (m)						
Operating time (min)						
Protection degree						
Receiver storage capacity (No. Remote controls)						
Weight (kg)						
L1 (mm)						

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CER45061700	Plastic material	6 Nm	17 rpm
CER45101700	Plastic material	10 Nm	17 rpm
CER45151700	Plastic material	15 Nm	17 rpm
CER45251700	Plastic material	25 Nm	17 rpm
CER45321700	Plastic material	32 Nm	17 rpm
CER45401700	Plastic material	40 Nm	17 rpm
CER45501200	Plastic material	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

	6/17	10/17	15/17	25/17	32/17	40/17	50/12
Motor torque (Nm)	6	10	15	25	32	40	50
Speed (rpm)	17	17	17	17	17	17	12
Power (W)	110	135	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,50	0,60	0,80	1,00	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 3						
Operating time (min)	4	4	4	4	4	4	4
Protection degree	IP44						
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15	15
Weight (kg)	2,3	2,4	2,5	3,2	3,2	3,2	3,2
L1 (mm)	473	488	503	543	543	543	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

Skipper Senso

One-channel remote control with integrated light and temperature sensors. It enables the desired light and temperature levels to be maintained, in summer and winter.

Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.

Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

OPEN ZRX Ø45

dual-radio, multiple benefits

Electronic limit switch with integrated dual-radio Cherubini CRC RX and Z-Wave

The motor can be controlled by voice assistants (Google Home and Amazon Alexa) and CRC RX radio remote controls, switches, and online applications associated with the gateway.

Total information return

The motor keeps its status aligned for any type of command received: via cable through push button or switch, via CRC RX radio through remote control, via Z-Wave network, via voice assistant, tablet or smartphone.

Efficiency

Thanks to the dual-radio, the motor offers the same advantages and ease of programming as the Cherubini range, plus seamless integration into Z-Wave home building automation systems.



Specific functions

- Manual and semi-automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.

MOTOR WITH BUILT-IN RECEIVER

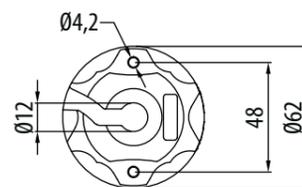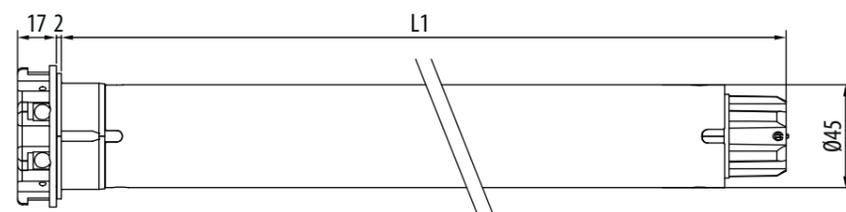

OPEN ZRX Ø45

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	6	10	15	25	32	40	50
Speed (rpm)	17	17	17	17	17	17	12
Power (W)	110	135	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,50	0,60	0,80	1,00	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 3						
Operating time (min)	4	4	4	4	4	4	4
Protection degree	IP44						
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15	15
Weight (kg)	2,3	2,4	2,5	3,2	3,2	3,2	3,2
L1 (mm)	473	488	503	543	543	543	543

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CZR45061700	Plastic material	6 Nm	17 rpm
CZR45101700	Plastic material	10 Nm	17 rpm
CZR45151700	Plastic material	15 Nm	17 rpm
CZR45251700	Plastic material	25 Nm	17 rpm
CZR45321700	Plastic material	32 Nm	17 rpm
CZR45401700	Plastic material	40 Nm	17 rpm
CZR45501200	Plastic material	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

6/17	10/17	15/17	25/17	32/17	40/17	50/12
6	10	15	25	32	40	50
17	17	17	17	17	17	12
110	135	170	225	250	275	275
230/50	230/50	230/50	230/50	230/50	230/50	230/50
433,92	433,92	433,92	433,92	433,92	433,92	433,92
0,50	0,60	0,80	1,00	1,10	1,25	1,25
lg. 3						
4	4	4	4	4	4	4
IP44						
15	15	15	15	15	15	15
2,3	2,4	2,5	3,2	3,2	3,2	3,2
473	488	503	543	543	543	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



METAHome Gateway

Enables control of Z-Wave devices and Cherubini CRC RX radio motors via smartphones and voice assistants.



Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

CLIMA PLUS RX Ø45

for all types of adjustable shutters - both for drop types and for coupling types

Electronic limit switch with built-in receiver, wire and radio control

Setting possible with remote control or wired switch.
Compatible with most home automation systems on the market.

Tilting setting

The 5 programmable tilting options are designed to control all types of shutters with adjustable slats on the market - both drop system and coupling system types.

Specific functions




- Manual and semi-automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorising an intermediate position.

Optional connections

Wired switch.



MOTOR WITH BUILT-IN RECEIVER

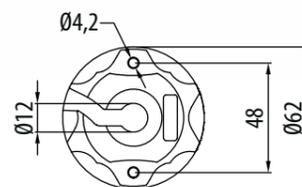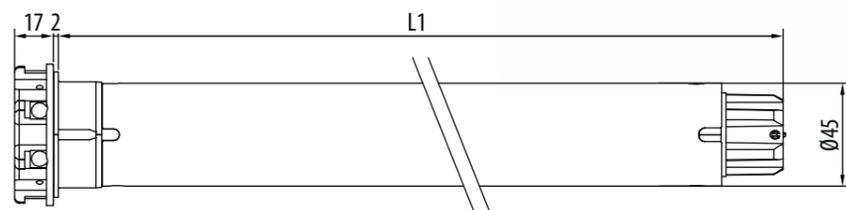

CLIMA PLUS RX Ø45

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CED45101200	Plastic material	10 Nm	12 rpm
CED45151200	Plastic material	15 Nm	12 rpm
CED45251200	Plastic material	25 Nm	12 rpm
CED45321200	Plastic material	32 Nm	12 rpm
CED45401200	Plastic material	40 Nm	12 rpm
CED45501200	Plastic material	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	10	15	25	32	40	50
Speed (rpm)	12	12	12	12	12	12
Power (W)	135	170	225	250	250	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00	1,10	1,10	1,25
Cable 4 x 0,75 (m)	lg. 3					
Operating time (min)	4	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15
Weight (kg)	2,4	2,5	3,2	3,2	3,2	3,2
L1 (mm)	488	503	543	543	543	543

	10/12	15/12	25/12	32/12	40/12	50/12
Motor torque (Nm)	10	15	25	32	40	50
Speed (rpm)	12	12	12	12	12	12
Power (W)	135	170	225	250	250	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00	1,10	1,10	1,25
Cable 4 x 0,75 (m)	lg. 3					
Operating time (min)	4	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15
Weight (kg)	2,4	2,5	3,2	3,2	3,2	3,2
L1 (mm)	488	503	543	543	543	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.



Blue Bus

Allows the central command of different range of motors.

WAVE RX Ø45

the motor for all awning types



Electronic limit switch with built-in receiver, wire and radio control

Attachment without brackets

Thanks to the metallic head, the motor can be fastened directly to the bracket.

Adjustment of the closing force

The possibility to adjust the applied force ensures the perfect closing of the cassette awnings and avoids the danger of over-stretching the awning fabric.

Specific functions

- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible (only for 10-15-25 Nm).
- Obstacle detection upwards, sensitivity setting on 3 levels possible.
- Torque control for the stop in closing position of cassette awnings.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.
Connection to WindTec, Mistral and Rugiada climatic controls via radio.

MOTOR WITH BUILT-IN RECEIVER



FUNCTIONS FOR PERGOLAS AND VERANDAS

Pitched pergolas



On pitched pergolas the motor stops automatically when the fabric reaches its point of greatest extension: performing a remote control sequence is sufficient to program the limit switches. From that moment onwards each time the motor reaches the opening limit switch position, it stops so that it keeps the awning fabric taut.

Pergolas and horizontal awnings

For pergolas and horizontal awnings it is possible to activate the Fabric Tightening function: the motor, after reaching the outer limit, automatically performs a short backwards turn to tighten the fabric.

Wave RX Ø45 4 rpm: the ideal for tilt slats pergolas


The "slow" version (4 rpm) was designed to automate tilt slats pergolas. The high-resolution electronic control of the revolutions enables fine tuning of the slats' angular position ensuring precise light management. The electronic limit switch managed by the remote control makes the motor extremely flexible and adaptable to every situation.

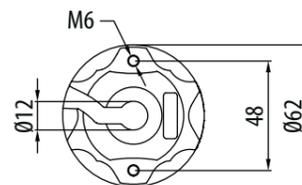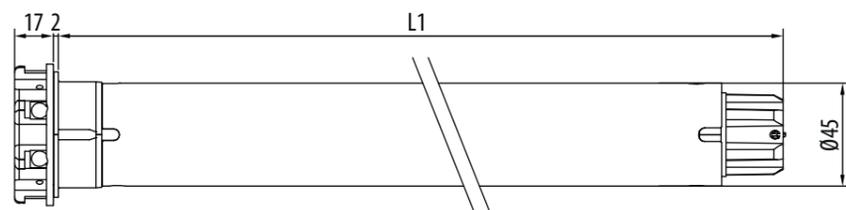

WAVE RX Ø45

MAIN CHARACTERISTICS

APPLICATION

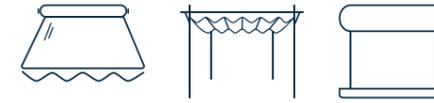

TECHNOLOGY



Code	Head	Torque	Speed
CET45101700	Zama	10 Nm	17 rpm
CET45151700	Zama	15 Nm	17 rpm
CET45251700	Zama	25 Nm	17 rpm
CET45321700	Zama	32 Nm	17 rpm
CET45401700	Zama	40 Nm	17 rpm
CET45501200	Zama	50 Nm	12 rpm
CET45400400	Zama	40 Nm	4 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	10	15	25	32	40	50	40
Speed (rpm)	17	17	17	17	17	12	4
Power (W)	135	170	225	250	275	275	215
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00	1,10	1,25	1,25	0,90
Cable 4 x 0,75 (m)	lg. 5						
Operating time (min)	4	4	4	4	4	4	4
Protection degree	IP44						
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15	15
Weight (kg)	3,0	3,1	3,6	3,6	3,6	3,6	3,4
L1 (mm)	488	503	543	543	543	543	525

10/17	15/17	25/17	32/17	40/17	50/12	40/4
10	15	25	32	40	50	40
17	17	17	17	17	12	4
135	170	225	250	275	275	215
230/50	230/50	230/50	230/50	230/50	230/50	230/50
433,92	433,92	433,92	433,92	433,92	433,92	433,92
0,60	0,80	1,00	1,10	1,25	1,25	0,90
lg. 5						
4	4	4	4	4	4	4
IP44						
15	15	15	15	15	15	15
3,0	3,1	3,6	3,6	3,6	3,6	3,4
488	503	543	543	543	543	525

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

ORA ZRX Ø45



dual-radio motor for awnings and pergolas

Electronic limit switch with integrated dual-radio Cherubini CRC RX and Z-Wave

The motor can be controlled by voice assistants (Google Home and Amazon Alexa) and CRC RX radio remote controls, switches, and online applications associated with the gateway.

Total information return

The motor keeps its status aligned for any type of command received: via cable through push button or switch, via CRC RX radio through remote control, via Z-Wave network, via voice assistant, tablet or smartphone.

Efficiency

Thanks to the dual-radio, the motor offers the same advantages and ease of programming as the Cherubini range, plus seamless integration into Z-Wave home building automation systems.

Specific functions


- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible (only for 10-15-25 Nm).
- Obstacle detection upwards, sensitivity setting on 3 levels possible.
- Torque control for the stop in closing position of cassette awnings.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.
Connection to WindTec, Mistral and Rugiada climatic controls via radio.

MOTOR WITH BUILT-IN RECEIVER

BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⊕

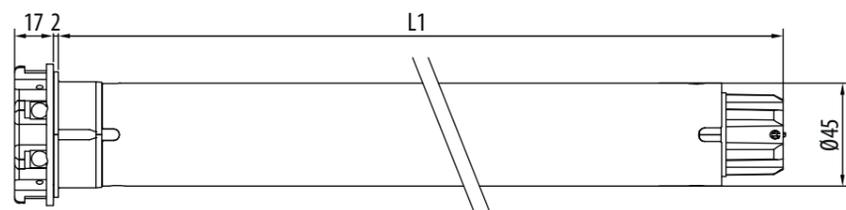


FUNCTIONS FOR PERGOLAS AND VERANDAS

Pitched pergolas

On pitched pergolas the motor stops automatically when the fabric reaches its point of greatest extension: performing a remote control sequence is sufficient to program the limit switches. From that moment onwards each time the motor reaches the opening limit switch position, it stops so that it keeps the awning fabric taut.

Pergolas and horizontal awnings

For pergolas and horizontal awnings it is possible to activate the Fabric Tightening function: the motor, after reaching the outer limit, automatically performs a short backwards turn to tighten the fabric.

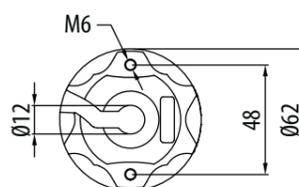

ORA ZRX Ø45

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CZT45101700	Zama	10 Nm	17 rpm
CZT45151700	Zama	15 Nm	17 rpm
CZT45251700	Zama	25 Nm	17 rpm
CZT45321700	Zama	32 Nm	17 rpm
CZT45401700	Zama	40 Nm	17 rpm
CZT45501200	Zama	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	10/17	15/17	25/17	32/17	40/17	50/12
Motor torque (Nm)	10	15	25	32	40	50
Speed (rpm)	17	17	17	17	17	12
Power (W)	135	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 5					
Operating time (min)	4	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15
Weight (kg)	3,0	3,1	3,6	3,6	3,6	3,6
L1 (mm)	488	503	543	543	543	543



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



METAHome Gateway

Enables control of Z-Wave devices and Cherubini CRC RX radio motors via smartphones and voice assistants.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

WAVE LOCK RX Ø45

the motor for automatic coupling awnings



Wave Lock RX was created to be adapted with great flexibility to all horizontal or vertical awnings equipped with automatic coupling.
Electronic programming of the coupling excursion and stretching force ensure consistent operation over time.

Attachment without brackets

Thanks to the metallic head, the motor can be fastened directly to the bracket.

Specific functions


- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible (only for 15-25 Nm).
- Obstacle detection upwards, sensitivity setting on 3 levels possible.
- Automatic programmable awning coupling and uncoupling system.
- Possibility of memorising the automatic coupling and uncoupling of the awning even in the intermediate position.
- Torque control for the stop in closing position of cassette awnings.
- Setting possible with remote control or wired switch.

Optional connections


Wired switch.
Connection to WindTec, Mistral and Rugiada climatic controls via radio.

MOTOR WITH BUILT-IN RECEIVER


- BROWN - PHASE
- WHITE - WIRED SWITCH
- BLUE - NEUTRAL
- YELLOW - GREEN ⚡

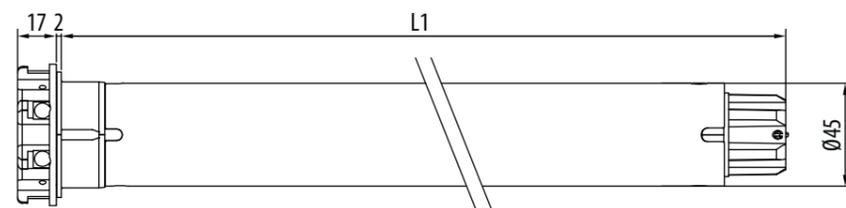

AUTOMATIC COUPLING AWNINGS

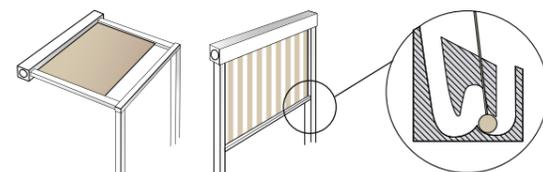


COUPLING AND UNCOUPLING SYSTEM

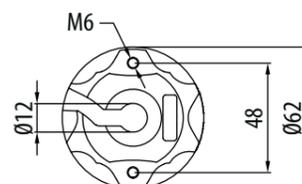

WAVE LOCK RX Ø45

APPLICATION

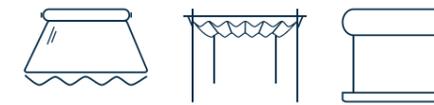

TECHNOLOGY



MAIN CHARACTERISTICS

Code	Head	Torque	Speed
CET45151725	Zama	15 Nm	17 rpm
CET45251725	Zama	25 Nm	17 rpm
CET45321725	Zama	32 Nm	17 rpm
CET45401725	Zama	40 Nm	17 rpm
CET45501225	Zama	50 Nm	12 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	15/17	25/17	32/17	40/17	50/12
Motor torque (Nm)	15	25	32	40	50
Speed (rpm)	17	17	17	17	12
Power (W)	170	225	250	275	275
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,80	1,00	1,10	1,25	1,25
Cable 4 x 0,75 (m)	lg. 5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15
Weight (kg)	3,1	3,6	3,6	3,6	3,6
L1 (mm)	503	543	543	543	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

SENSO RX Ø45

specific for screens and mosquito nets



Electronic limit switch with built-in receiver, wire and radio control

Safety and simplicity

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions

- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible.
- Obstacle detection upwards, sensitivity setting on 3 levels possible.
- Torque control for the stop in closing position of cassette awnings.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.



Optional connections

- Wired switch.
- Connection to WindTec and Rugiada climatic controls via radio.



MOTOR WITH BUILT-IN RECEIVER


- BROWN - PHASE
- WHITE - WIRED SWITCH
- BLUE - NEUTRAL
- YELLOW - GREEN ⊕

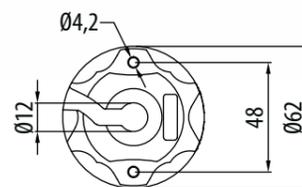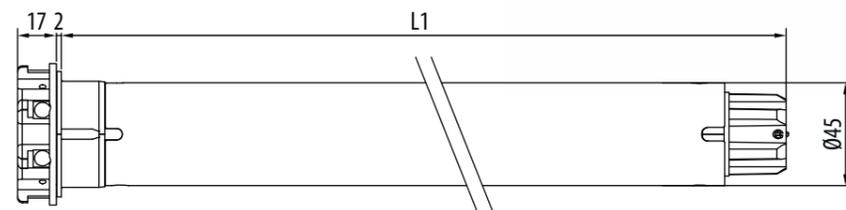

SENSO RX Ø45

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CEA45101700	Plastic material	10 Nm	17 rpm
CEA45151700	Plastic material	15 Nm	17 rpm
CEA45251700	Plastic material	25 Nm	17 rpm
CEA45073000	Plastic material	7 Nm	30 rpm
CEA45153000	Plastic material	15 Nm	30 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	10	15	25	7	15
Speed (rpm)	17	17	17	30	30
Power (W)	135	170	225	170	225
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00	0,80	1,00
Cable 4 x 0,75 (m)	lg. 5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15
Weight (kg)	2,4	2,5	3,2	2,5	3,2
L1 (mm)	488	503	543	503	543

	10/17	15/17	25/17	7/30	15/30
Motor torque (Nm)	10	15	25	7	15
Speed (rpm)	17	17	17	30	30
Power (W)	135	170	225	170	225
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00	0,80	1,00
Cable 4 x 0,75 (m)	lg. 5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15
Weight (kg)	2,4	2,5	3,2	2,5	3,2
L1 (mm)	488	503	543	503	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec

Wind and sun/wind sensors with connection to the motor via radio (wireless).

REBIS ZRX Ø45

dual-radio motor for technical blinds and screens

Electronic limit switch with integrated dual-radio Cherubini CRC RX and Z-Wave

The motor can be controlled by voice assistants (Google Home and Amazon Alexa) and CRC RX radio remote controls, switches, and online applications associated with the gateway.

Total information return

The motor keeps its status aligned for any type of command received: via cable through push button or switch, via CRC RX radio through remote control, via Z-Wave network, via voice assistant, tablet or smartphone.

Efficiency

Thanks to the dual-radio, the motor offers the same advantages and ease of programming as the Cherubini range, plus seamless integration into Z-Wave home building automation systems.

Safety and simplicity

Easy programming and operation: the motor confirms all the steps by means of small rotations.

Specific functions


- Adjustment of the limit switches from the remote control.
- "Super-sensitivity" function on obstacle detection, set by remote control, setting on 3 levels possible, especially for screens and mosquito blinds.
- Torque control for the stop in closing position of cassette awnings.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections



Wired switch.

Connection to WindTec and Rugiada climatic controls via radio.

MOTOR WITH BUILT-IN RECEIVER



BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⊕

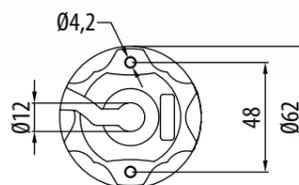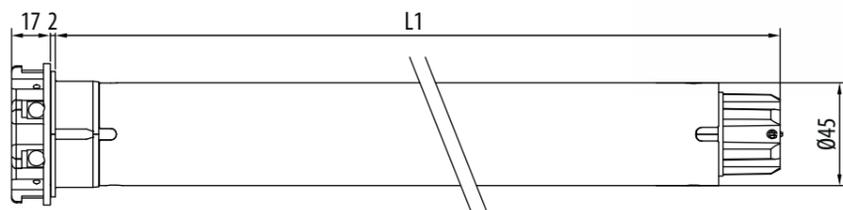

REBIS ZRX Ø45

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	10	15	25
Speed (rpm)	17	17	17
Power (W)	135	170	225
Power supply (V/Hz)	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00
Cable 4 x 0,75 (m)	lg. 5	lg. 5	lg. 5
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15
Weight (kg)	2,4	2,5	3,2
L1 (mm)	488	503	543

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CZA45101700	Plastic material	10 Nm	17 rpm
CZA45151700	Plastic material	15 Nm	17 rpm
CZA45251700	Plastic material	25 Nm	17 rpm

Certifications are available on the cherubini-group.com website

	10/17	15/17	25/17
Motor torque (Nm)	10	15	25
Speed (rpm)	17	17	17
Power (W)	135	170	225
Power supply (V/Hz)	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92
Consumption (A)	0,60	0,80	1,00
Cable 4 x 0,75 (m)	lg. 5	lg. 5	lg. 5
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15
Weight (kg)	2,4	2,5	3,2
L1 (mm)	488	503	543

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



METAHome Gateway

Enables control of Z-Wave devices and Cherubini CRC RX radio motors via smartphones and voice assistants.



Climatic controls WindTec

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

GARDA Ø58



Mechanical limit switch

Reliable and easy adjustment of the limit switches.

Strength and safety



The star-shaped metallic reducer pin makes the motor highly reliable.

Attachment without brackets

Thanks to the metallic head, the motor can be fastened directly to the bracket without needing additional supports.



MOTOR WITH WIRE CONTROL

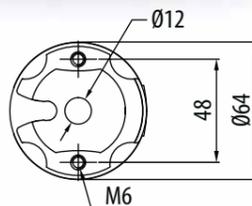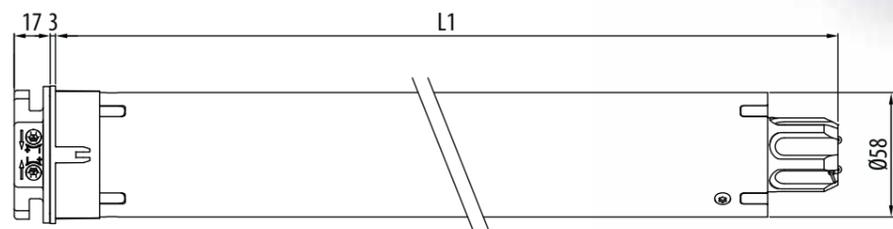

GARDA Ø58

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CME58061700	Zama	65 Nm	17 rpm
CME58081700	Zama	85 Nm	17 rpm
CME58101100	Zama	100 Nm	11 rpm
CME58121100	Zama	120 Nm	11 rpm
CME58027500	Zama	20 Nm	75 rpm
CME58043200	Zama	40 Nm	32 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

	65/17	85/17	100/11	120/11	20/75	40/32
Motor torque (Nm)	65	85	100	120	20	40
Speed (rpm)	17	17	11	11	75	32
Maximum turns*	25	25	25	25	37	37
Power (W)	330	375	360	415	415	360
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Consumption (A)	1,50	1,70	1,60	1,90	1,90	1,60
Cable** 4 x 0,75 (m)	lg. 2,5					
Operating time (min)	4	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44	IP44
Weight (kg)	5,7	5,7	5,7	5,7	5,7	5,7
L1 (mm)	646	646	646	646	646	646

*Upon request, available with 37 turns before stop.

** Possibility of cable with Hirschmann STAS 3.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.

Radio receivers for awnings

These receivers make it possible to activate mechanical motors automatically.

Radio receivers for rolling shutters

Small radio receivers. Compatible with the Cherubini remote controls.

Climatic controls WindTec WindTec SC

Wind and sun sensor (wireless, via radio receiver) and wind sensor (wired).

OCEAN Ø58



Mechanical limit switch

Reliable and easy adjustment of the limit switches.
Double access to the adjusting screws.

Strength and safety

The star-shaped metallic reducer pin makes the motor highly reliable.

Attachment without brackets


Thanks to the metallic head, the motor can be fastened directly to the bracket without needing additional supports.

Compact override

Thanks to its small size, this device can be installed in limited spaces.
The reduction ratio is 1:55.



MOTOR WITH WIRE CONTROL AND OVERRIDE

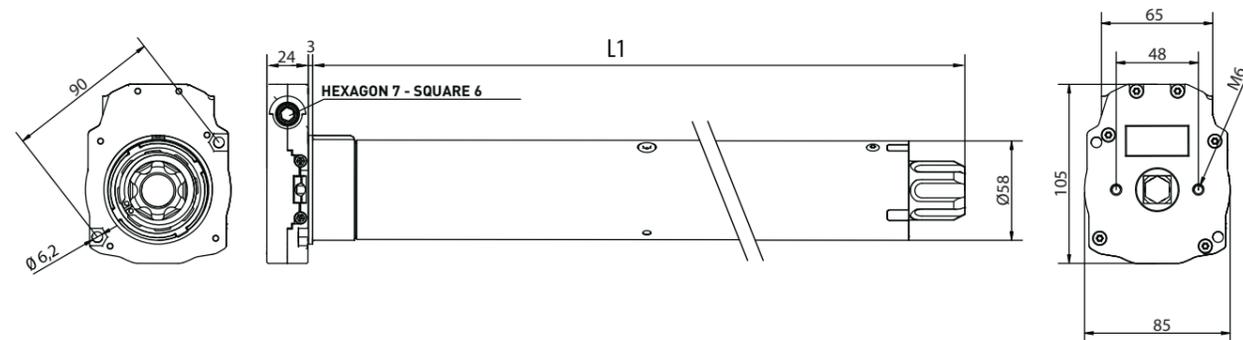

OCEAN Ø58

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	65	85	100	120	20
Speed (rpm)	17	17	11	11	75
Maximum turns	29	29	29	29	29
Power (W)	330	375	360	415	415
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Consumption (A)	1,50	1,70	1,60	1,90	1,90
Cable* 4 x 0,75 (m)	lg. 2,5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Weight (kg)	7,0	7,0	7,0	7,0	7,0
L1 (mm)	703	703	703	703	703

ACCESSORIES FOR MANUAL OPERATION

For a complete list see "Accessories for manual operation" on page 158

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CMS58061700	Zama	65 Nm	17 rpm
CMS58081700	Zama	85 Nm	17 rpm
CMS58101100	Zama	100 Nm	11 rpm
CMS58121100	Zama	120 Nm	11 rpm
CMS58027500	Zama	20 Nm	75 rpm

Certifications are available on the cherubini-group.com website

	65/17	85/17	100/11	120/11	20/75
Motor torque (Nm)	65	85	100	120	20
Speed (rpm)	17	17	11	11	75
Maximum turns	29	29	29	29	29
Power (W)	330	375	360	415	415
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50
Consumption (A)	1,50	1,70	1,60	1,90	1,90
Cable* 4 x 0,75 (m)	lg. 2,5				
Operating time (min)	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44
Weight (kg)	7,0	7,0	7,0	7,0	7,0
L1 (mm)	703	703	703	703	703

* Possibility of cable with Hirschmann STAS 3.



Foldable crank
with hook length 150 cm
Ref. 7463 150G 2101



Operating crank
lg. 150 cm
Ref. 9100 150L CH02



Eye with hexagon
7 x 86 mm
Ref. 6010 7008 CH16

AUTOMATION OF THE MOTOR WITH MANUAL OVERRIDE DEVICE

Ocean combined with TDS Compact and Compact Roll radio receivers becomes a radio controlled motor and takes on new functions.

Moving the override, the end positions remain unchanged.



OCEAN + TDS Compact

- Obstacle recognition during closing.
- Closing force adjustment on 3 levels possible.
- First intermediate position programmable from the remote control.
- Second intermediate position programmable from the remote control and controlled by the WindTec Lux light sensor.



OCEAN + Compact ROLL

- Obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Two intermediate positions that are programmable and usable from the remote control.

WAVE WIRE Ø58

the plug&play for awnings

Electronic limit switch, wire control and encoder

EASY TO INSTALL, EASY TO PROGRAM!



- With cassette awnings, the motor allows the automatic setting of the closing limit switch.
- For other types of awnings it's possible to set both limit switches manually, through simple sequences on the control panel.
- Adjustment of the limit switches through control panel: no need to access the motor head.
- DEDICATED BUTTON PANEL NOT REQUIRED!

Specific functions

- May be connected either directly or in parallel.



MOTOR WITH WIRE CONTROL

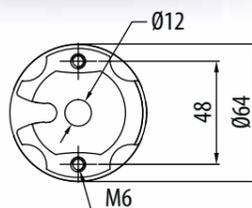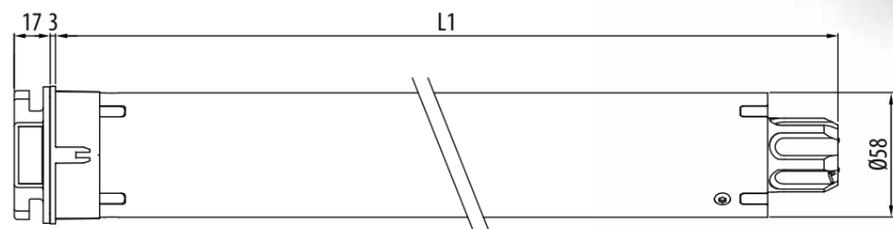

WAVE WIRE Ø58

MAIN CHARACTERISTICS

APPLICATION



Code	Head	Torque	Speed
CEW58061700	Zama	65 Nm	17 rpm
CEW58081700	Zama	85 Nm	17 rpm
CEW58121100	Zama	120 Nm	11 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	65	85	120
Speed (rpm)	17	17	11
Power (W)	330	375	415
Power supply (V/Hz)	230/50	230/50	230/50
Consumption (A)	1,50	1,70	1,90
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Weight (kg)	6,0	6,0	6,0
L1 (mm)	646	646	646

65/17	85/17	120/11
65	85	120
17	17	11
330	375	415
230/50	230/50	230/50
1,50	1,70	1,90
lg. 2,5	lg. 2,5	lg. 2,5
4	4	4
IP44	IP44	IP44
6,0	6,0	6,0
646	646	646

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



TDS Gold radio receiver

This receiver makes it possible to activate mechanical motors automatically.



Climatic controls WindTec WindTec SC

Wind and sun sensor (wireless, via radio receiver) and wind sensor (wired).



Blue Bus

Allows the central command of different range of motors.

TRONIC RX Ø58

safety and comfort

Electronic limit switch with built-in receiver, wire and radio control

Simple and intuitive adjustment of the limit switches from the remote control.

The encoder technology makes it possible to keep the position set with optimum precision and reliability.

Safety and simplicity

High-safety coding system "Rolling Code".

Easy programming and operation: the motor confirms all the steps by means of small rotations.



Specific functions

- Manual and semi-automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.

MOTOR WITH BUILT-IN RECEIVER

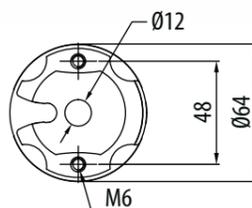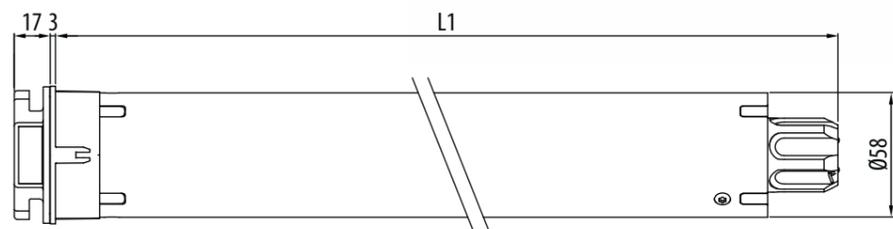

TRONIC RX Ø58

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	65	85	100	120
Speed (rpm)	17	17	11	11
Power (W)	330	375	360	415
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92
Consumption (A)	1,50	1,70	1,60	1,90
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15
Weight (kg)	6,0	6,0	6,0	6,0
L1 (mm)	646	646	646	646

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CER58061700	Zama	65 Nm	17 rpm
CER58081700	Zama	85 Nm	17 rpm
CER58101100	Zama	100 Nm	11 rpm
CER58121100	Zama	120 Nm	11 rpm

Certifications are available on the cherubini-group.com website

	65/17	85/17	100/11	120/11
Motor torque (Nm)	65	85	100	120
Speed (rpm)	17	17	11	11
Power (W)	330	375	360	415
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92
Consumption (A)	1,50	1,70	1,60	1,90
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15
Weight (kg)	6,0	6,0	6,0	6,0
L1 (mm)	646	646	646	646



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106

CLIMA PLUS RX

Ø58



for all types of adjustable shutters - both for drop types and for coupling types

Electronic limit switch with built-in receiver, wire and radio control

Setting possible with remote control or wired switch.

Compatible with most home automation systems on the market.

Tilting setting

The 5 programmable tilting options are designed to control all types of shutters with adjustable slats on the market - both drop system and coupling system types.

Specific functions

- Manual and semi-automatic adjustment of the limit switches.
- Protection against freezing and obstacle detection on both directions, sensitivity setting on 3 levels possible.
- Possibility of memorising an intermediate position.

Optional connections



Wired switch.



MOTOR WITH BUILT-IN RECEIVER



BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⚡

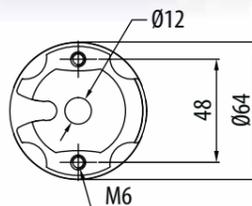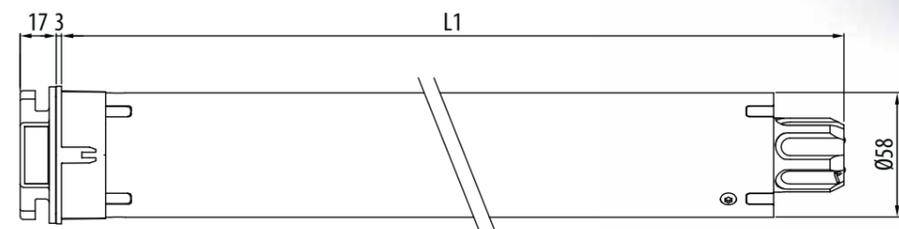


CLIMA PLUS RX Ø58

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)	65	85	100	120
Speed (rpm)	12	12	11	11
Power (W)	330	330	360	415
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92
Consumption (A)	1,50	1,50	1,60	1,90
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15
Weight (kg)	6,0	6,0	6,0	6,0
L1 (mm)	646	646	646	646

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CE58061200	Zama	65 Nm	12 rpm
CE58081200	Zama	85 Nm	12 rpm
CE58101100	Zama	100 Nm	11 rpm
CE58121100	Zama	120 Nm	11 rpm

Certifications are available on the cherubini-group.com website

	65/12	85/12	100/11	120/11
Motor torque (Nm)	65	85	100	120
Speed (rpm)	12	12	11	11
Power (W)	330	330	360	415
Power supply (V/Hz)	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92
Consumption (A)	1,50	1,50	1,60	1,90
Cable 4 x 0,75 (m)	lg. 2,5	lg. 2,5	lg. 2,5	lg. 2,5
Operating time (min)	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15
Weight (kg)	6,0	6,0	6,0	6,0
L1 (mm)	646	646	646	646

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Domotic Transmitter

It gives the possibility of integrate motors to the home automation system via radio.

WAVE RX Ø58

the motor for all awning types



Electronic limit switch with built-in receiver, wire and radio control

Attachment without brackets

Thanks to the metallic head, the motor can be fastened directly to the bracket.

Adjustment of the closing force

The possibility to adjust the applied force ensures the perfect closing of the cassette awnings and avoids the danger of over-stretching the awning fabric.

Specific functions

- Obstacle detection upwards, sensitivity setting on 3 levels possible.
- Torque control for the stop in closing position of cassette awnings.
- Possibility of memorising an intermediate position.
- Setting possible with remote control or wired switch.

Optional connections

Wired switch.
Connection to WindTec, Mistral and Rugiada climatic controls via radio.



FUNCTIONS FOR PERGOLAS AND VERANDAS



Pitched pergolas

On pitched pergolas the motor stops automatically when the fabric reaches its point of greatest extension: performing a remote control sequence is sufficient to program the limit switches. From that moment onwards each time the motor reaches the opening limit switch position, it stops so that it keeps the awning fabric taut.





Pergolas and horizontal awnings

For pergolas and horizontal awnings it is possible to activate the Fabric Tightening function: the motor, after reaching the outer limit, automatically performs a short backwards turn to tighten the fabric.

MOTOR WITH BUILT-IN RECEIVER



BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⚡

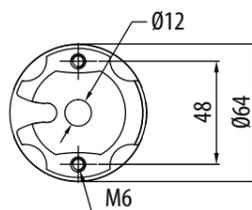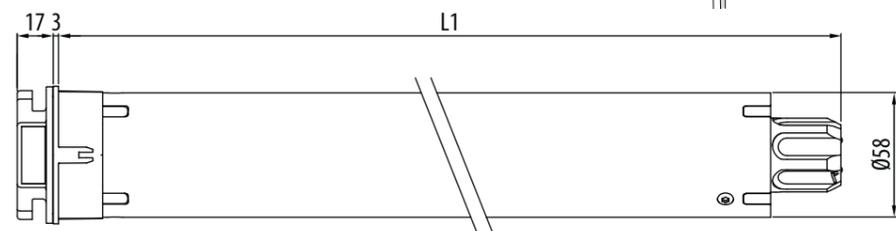

WAVE RX Ø58

MAIN CHARACTERISTICS

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CET58061700	Zama	65 Nm	17 rpm
CET58081700	Zama	85 Nm	17 rpm
CET58101100	Zama	100 Nm	11 rpm
CET58121100	Zama	120 Nm	11 rpm
CET58027500	Zama	20 Nm	75 rpm
CET58043200	Zama	40 Nm	32 rpm

Certifications are available on the cherubini-group.com website

TECHNICAL FEATURES

Motor torque (Nm)	65	85	100	120	20	40
Speed (rpm)	17	17	11	11	75	32
Power (W)	330	375	360	415	415	360
Power supply (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92	433,92	433,92	433,92
Consumption (A)	1,50	1,70	1,60	1,90	1,90	1,60
Cable 4 x 0,75 (m)	lg. 4,5					
Operating time (min)	4	4	4	4	4	4
Protection degree	IP44	IP44	IP44	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15	15	15	15
Weight (kg)	6,0	6,0	6,0	6,0	6,0	6,0
L1 (mm)	646	646	646	646	646	646

65/17	85/17	100/11	120/11	20/75	40/32
65	85	100	120	20	40
17	17	11	11	75	32
330	375	360	415	415	360
230/50	230/50	230/50	230/50	230/50	230/50
433,92	433,92	433,92	433,92	433,92	433,92
1,50	1,70	1,60	1,90	1,90	1,60
lg. 4,5					
4	4	4	4	4	4
IP44	IP44	IP44	IP44	IP44	IP44
15	15	15	15	15	15
6,0	6,0	6,0	6,0	6,0	6,0
646	646	646	646	646	646

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.



Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

WAVE LOCK RX

Ø58

the motor for automatic coupling awnings



Electronic limit switch with built-in receiver, wire and radio control

Wave Lock RX was created to be adapted with great flexibility to all horizontal or vertical awnings equipped with automatic coupling.

Electronic programming of the coupling excursion and stretching force ensure consistent operation over time.

Attachment without brackets

Thanks to the metallic head, the motor can be fastened directly to the bracket.

Specific functions

- Possibility of memorising the automatic coupling and uncoupling of the awning even in the intermediate position.
- Possibility of storing the automatic coupling and uncoupling of the blind in the intermediate position.
- Obstacle detection upwards, sensitivity setting on 3 levels possible.
- Torque control for the stop in closing position of cassette awnings.
- Setting possible with remote control or wired switch.

Optional connections


Wired switch.

Connection to WindTec, Mistral and Rugiada climatic controls via radio.


MOTOR WITH BUILT-IN RECEIVER




BROWN - PHASE
WHITE - WIRED SWITCH
BLUE - NEUTRAL
YELLOW - GREEN ⚡

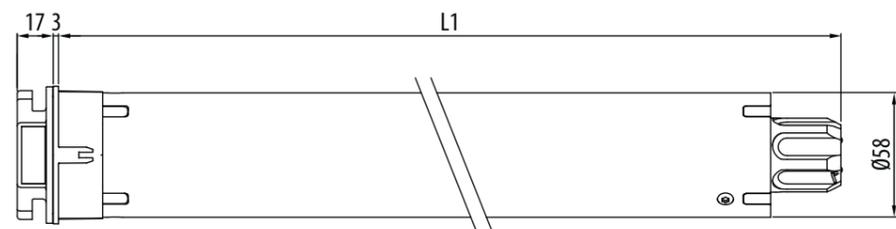

AUTOMATIC COUPLING AWNINGS

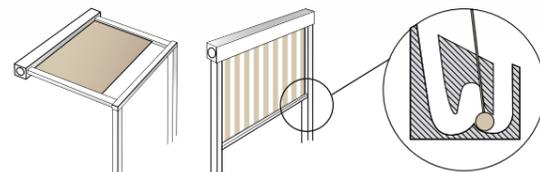

COUPLING AND UNCOUPLING SYSTEM

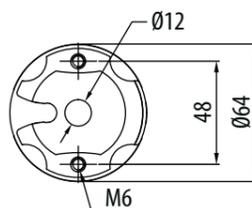

WAVE LOCK RX Ø58

MAIN CHARACTERISTICS

TECHNICAL FEATURES

Motor torque (Nm)		
Speed (rpm)		
Power (W)		
Power supply (V/Hz)		
Radio frequency (MHz)		
Consumption (A)		
Cable 4 x 0,75 (m)		
Operating time (min)		
Protection degree		
Receiver storage capacity (No. Remote controls)		
Weight (kg)		
L1 (mm)		

APPLICATION



TECHNOLOGY



Code	Head	Torque	Speed
CET58081725	Zama	85 Nm	17 rpm
CET58101125	Zama	100 Nm	11 rpm
CET58121125	Zama	120 Nm	11 rpm

Certifications are available on the cherubini-group.com website

	85/17	100/11	120/11
Motor torque (Nm)	85	100	120
Speed (rpm)	17	11	11
Power (W)	375	360	415
Power supply (V/Hz)	230/50	230/50	230/50
Radio frequency (MHz)	433,92	433,92	433,92
Consumption (A)	1,70	1,60	1,90
Cable 4 x 0,75 (m)	lg. 4,5	lg. 4,5	lg. 4,5
Operating time (min)	4	4	4
Protection degree	IP44	IP44	IP44
Receiver storage capacity (No. Remote controls)	15	15	15
Weight (kg)	6,0	6,0	6,0
L1 (mm)	646	646	646

COMPATIBLE SYSTEMS

For the complete range of compatible systems see "Compatibility Table" on page 106



Cherubini Remote Controls

One-channel, multi-channel, wall-mounted remote controls.





Rugiada TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter.



Climatic controls WindTec and Mistral

Wind sensor, wind and sun sensor and wireless vibrating wind sensor.

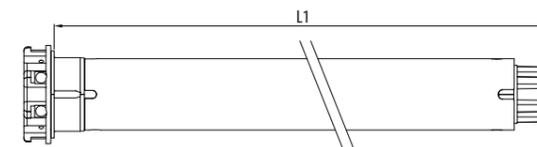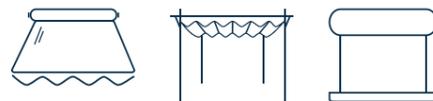

		Torque/Speed	Code	Torque	Speed	Weight (Kg)	L1 (mm)	For details:	
Plug&Play		PLUG&PLAY PLUS Ø35 Electronic limit switch with wired control	5/30	CEQ35053000	5 Nm	30 rpm	1,7	547	Page 34
Roll		ROLL Ø35 Mechanical limit switch	3/30	CMP35033000	3 Nm	30 rpm	1,6	460	Page 32
			5/30	CMP35053000	5 Nm	30 rpm	1,6	460	Page 32
		ROLL Ø45 Mechanical limit switch	7/30	CMP45073000	7 Nm	30 rpm	2,5	546	Page 42
			15/30	CMP45153000	15 Nm	30 rpm	3,0	546	Page 42
Senso Wire		SENSO WIRE Ø35 Electronic limit switch with wired control	5/30	CEG35053000	5 Nm	30 rpm	1,7	547	Page 36
		SENSO WIRE Ø45 Electronic limit switch with wired control	7/30	CEG45073000	7 Nm	30 rpm	2,5	503	Page 68
			15/30	CEG45153000	15 Nm	30 rpm	3,2	543	Page 68
Senso RX		SENSO RX Ø35 Electronic limit switch and built-in radio	3/30	CEA35033000	3 Nm	30 rpm	1,7	547	Page 40
			5/30	CEA35053000	5 Nm	30 rpm	1,7	547	Page 40
		SENSO RX Ø45 Electronic limit switch and built-in radio	7/30	CEA45073000	7 Nm	30 rpm	2,5	503	Page 84
			15/30	CEA45153000	15 Nm	30 rpm	3,2	543	Page 84
Wave RX		WAVE RX Ø58 Electronic limit switch and built-in radio	20/75	CET58027500	20 Nm	75 rpm	6,0	646	Page 98
			40/32	CET58043200	40 Nm	32 rpm	6,0	646	Page 98
Garda		GARDA Ø58 Mechanical limit switch	20/75	CME58027500	20 Nm	75 rpm	5,7	646	Page 88
			40/32	CME58043200	40 Nm	32 rpm	5,7	646	Page 88
Ocean		OCEAN Ø58 Mechanical limit switch with override device	20/75	CMS58027500	20 Nm	75 rpm	7,0	703	Page 90

"For us, home automation means creating devices that are easy to integrate and manage; creating open systems that are easy to use for both the installer and the end-user."

Elpidio Scaroni
Electronic design office



HOME AUTOMATION AND REMOTE CONTROLS

compatibility table	p. 106
accessories for home automation	
METAHome	p. 108
MAGO	p. 112
DOMOTIC RX RECEIVER	p. 116
BUS MODULES	p. 118
EXPANSION MODULE	p. 120
DOMOTIC TRANSMITTER	p. 121
DOMOTIC ISOLATOR	p. 121
GIRO series remote controls	
GIRO	p. 122
GIRO PLUS	p. 122
GIRO LUX	p. 122
GIRO P-LUX	p. 122
GIRO WALL	p. 126
POP series remote controls	
POP	p. 124
POP PLUS	p. 124
POP LUX	p. 124
POP P-LUX	p. 124
SKIPPER series remote controls	
SKIPPER POCKET	p. 127
SKIPPER LCD	p. 128
SKIPPER SENSO	p. 130
TOUCH series remote controls	
TOUCH-1L	p. 127
TOUCH-LOCK4	p. 127
climatic controls	
WINDTEC	p. 132
WINDTEC LUX	p. 132
WINDTEC SC	p. 132
MISTRAL	p. 134
GOCCIA wired rain-sensor	p. 135
RUGIADA TX radio rain-sensor	p. 135
control units and receivers	
TDS COMPACT Radio receiver for awnings	p. 136
TDS SILVER Control unit for awnings	p. 136
TDS GOLD Radio receiver for awnings	p. 137
TANDEM Radio receiver for awnings	p. 137
MINI Radio receiver for awnings and rolling shutters	p. 138
MYROLL radio receiver for rolling shutters	p. 138
OPTIME Radio receiver for rolling shutters	p. 139
COMPACT ROLL Radio receiver for rolling shutters	p. 139
ORIENS CRC Radio receiver for Venetian Blind motors	p. 140
electrical accessories	
TIMERS	p. 141
"COMFORT" SIGNAL REPEATER	p. 142
MULTIPLE CONTROL RELAY	p. 142
UNIVERSAL PROGRAMMING CABLE	p. 142
SOLEXA	p. 143

automation systems compatibility TABLE



		A510008 EXPANSION MODULE	A510023 BLUE BUS A510024 BLUE BUS RX	A510025 BLUE BUS TDS A510026 BLUE BUS TDS RX	TIMERS A510027 A510029	A510074 TIMER RADIO	A520007 WINDTEC	A520008 WINDTEC LUX	A520012 MISTRAL	A520016 RUGIADA	CHERUBINI REMOTE CONTROLS	A530058 POCKET 4C A530100 TOUCH-LOCK4	A530065 DOMOTIC TRANSMITTER
ELECTRONIC LIMIT SWITCH AND BUILT-IN RADIO	ORA ZRX					✓	✓	✓	✓	✓	✓	✓	✓
	OPEN ZRX					✓					✓	✓	✓
	REBIS ZRX					✓	✓	✓	✓	✓	✓	✓	✓
	SENSO RX		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
	WAVE RX		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
	WAVE LOCK RX		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
	TRONIC RX		✓	✓		✓					✓	✓	✓
	CLIMA PLUS RX		✓			✓					✓		✓
	PLUG&PLAY SHORT RX		✓	✓		✓					✓	✓	✓
MECHANICAL LIMIT SWITCH WITH BUILT-IN RECEIVER	GARDA RX		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
	OCEAN RX		✓	✓		✓					✓	✓	✓
ELECTRONIC LIMIT SWITCH WITH WIRE CONTROL	PLUG&PLAY PLUS		✓	✓	✓								
	PLUG&PLAY SHORT		✓	✓	✓								
	PLUG&PLAY		✓	✓	✓								
	PLUG&PLAY OCEAN EASY		✓	✓	✓								
	PLUG&PLAY SAFE EASY		✓	✓	✓								
	WAVE WIRE		✓	✓	✓								
	SENSO WIRE		✓	✓	✓								
MECHANICAL LIMIT SWITCH	GARDA	✓	✓	✓	✓								
	ROLL	✓	✓	✓	✓								
	MICRO	✓	✓	✓	✓								
MECHANICAL LIMIT SWITCH WITH OVERRIDE DEVICE	OCEAN	✓	✓	✓	✓								

for additional compatibilities see table below

The following motors, together with the control units indicated, become compatible with other automation systems:			A520007 WINDTEC	A520008 WINDTEC LUX	A520010 WINDTEC SC	A520012 MISTRAL	A520017 GOCCIA	A520016 RUGIADA	A510074 TIMER RADIO	CHERUBINI REMOTE CONTROLS	A530058 SKIPPER POCKET 4C	A530065 DOMOTIC TRANSMITTER	A530100 TOUCH-LOCK4	
ELECTRONIC LIMIT SWITCH WITH WIRE CONTROL	+	A510024 BUS RX			✓		✓		✓	✓		✓		
		A510025 BUS TDS			✓		✓							
		A510026 BUS TDS RX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
		A510021 TDS SILVER (only with WAVE WIRE, SENSO WIRE)			✓									
		A510030 TANDEM (only with WAVE WIRE)	✓	✓	✓	✓		✓		✓			✓	
MECHANICAL LIMIT SWITCH	+	A510024 BUS RX							✓	✓		✓		
		A510025 BUS TDS			✓		✓							
		A510026 BUS TDS RX	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
		A510020 TDS GOLD	✓	✓	✓	✓		✓	✓	✓	✓	✓		
		A510021 TDS SILVER			✓									
MECHANICAL LIMIT SWITCH WITH OVERRIDE DEVICE	+	A510038 TDS COMPACT	✓	✓		✓		✓	✓	✓	✓	✓	✓	
		A510036 MINI*	✓	✓		✓		✓	✓	✓	✓	✓	✓	
		A510037 COMPACT ROLL							✓	✓	✓	✓	✓	✓
		A510039 OPTIME*							✓	✓	✓	✓	✓	✓
		A510062 MYROLL							✓	✓	✓	✓	✓	✓
		A510030 TANDEM**	✓	✓	✓	✓		✓	✓	✓	✓	✓		

*Except GARDA Ø58 and OCEAN Ø58
**Except OCEAN Ø45 and Ø58

METAHome

Connection and opening for smart control




A SET OF SMART HOME FUNCTIONALITIES, CONFIGURABLE AND MODULAR TO SUIT EVERY NEED.

The METAHome gateway allows you to integrate both Z-Wave and Cherubini Radio CRC RX devices into one system, offering a smart home feature set that is configurable and modular for every need. With METAHome, you can control a wide range of Z-Wave devices, both Cherubini and leading manufacturers. METAHome allows you to optimise the management of a building via an App, setting up scenarios and automation for:

- Rolling shutters
- Awnings and screens
- Smartlock
- Heating
- Cooling
- Lighting
- Audio and video
- Smart devices

Available for mobile iOS and Android operating systems.

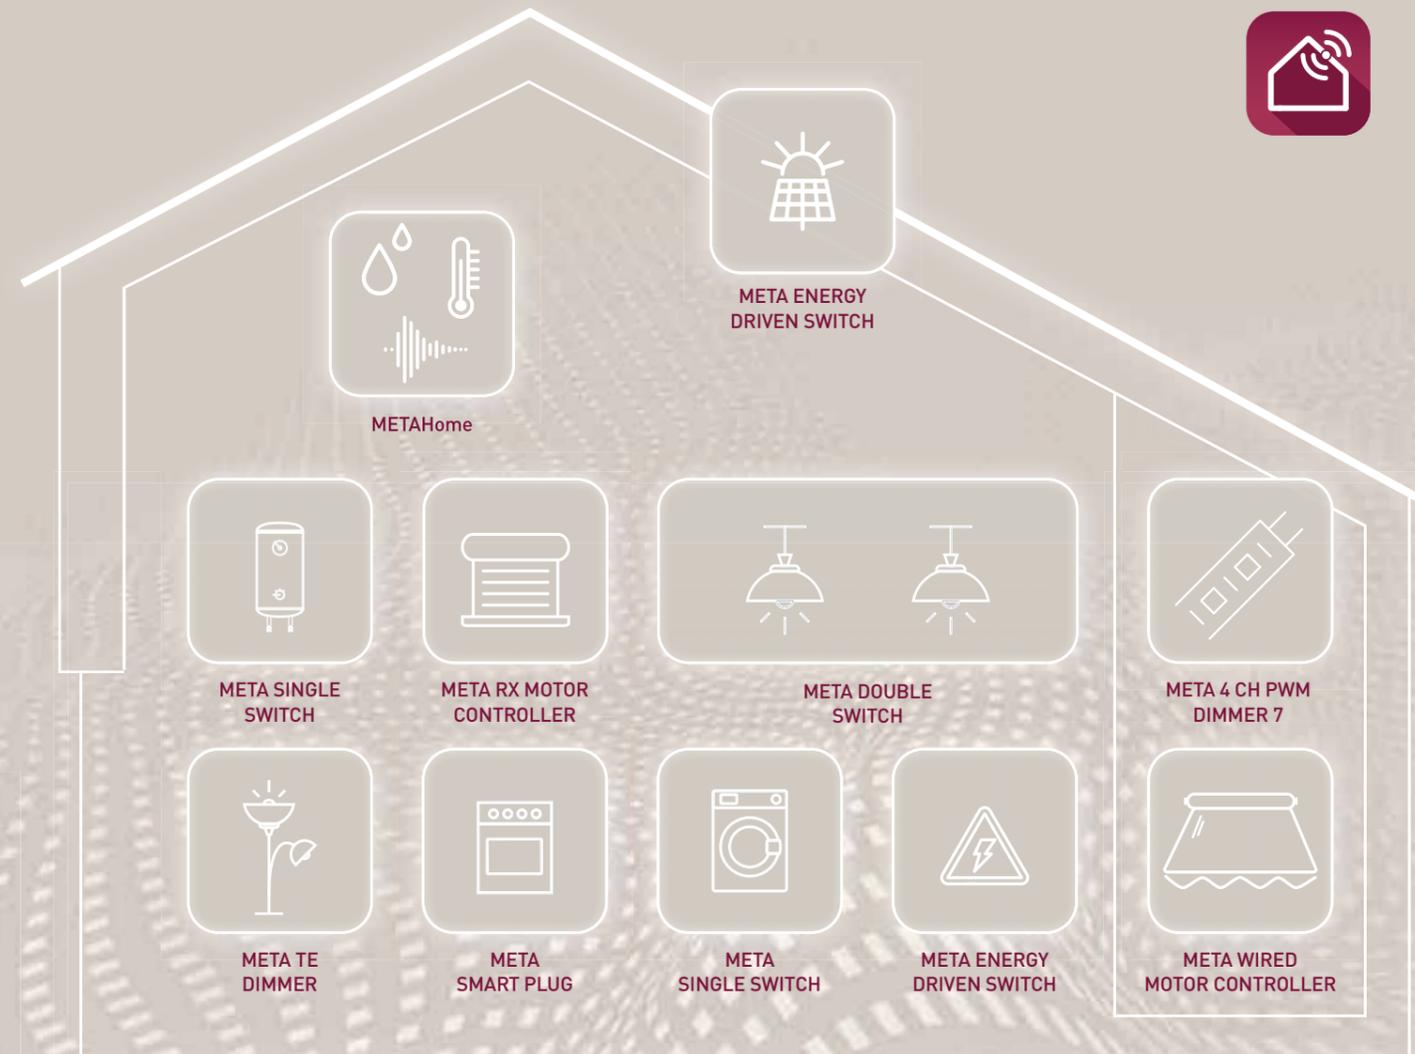

METAHome GATEWAY

Gateway with dedicated App for managing a network of devices, both via Cherubini Radio CRC RX protocol and Z-Wave, also remotely. Available in three colours: Warm Gray, Blue and Burgundy.

VERSIONS

Code	Model	Colour
A510075	METAHome Gateway	Warm Gray
A510076	METAHome Gateway	Burgundy
A510077	METAHome Gateway	Blue

CHARACTERISTICS

	METAHome Gateway
Power supply	5 V DC
Working temperature	-10 +40 °C
Radio protocols	Z-Wave, WiFi, RF 433,92
Maximum distance	100 m open 40 m closed
Dimensions	105x105x23 mm
Protection degree	IP20



META

A new system, multiple benefits

- Ultra-small size: the smallest modules in the world
- Easier installation thanks to SmartStart technology
- Longer transmission radius: +100 metres
- More powerful modules
- Reduced consumption and increased energy efficiency
- Long life: Zero Crossing contact protection technology
- S2 security: communication between devices is protected by advanced encryption standards
- Direct control of other associated devices
- Scenarios activation
- Power on/off with all types of buttons and switches
- Highly accurate consumption measurement
- Personalised reactions to alarms



A510078 META WIRED MOTOR CONTROLLER 7

- Actuator for motors with standard connection
- Works with any type of motor
 - Controls rolling shutters, awnings and screens
 - Possibility to program different intermediate positions
 - Auto-calibration system
 - Extremely precise position recognition



A510079 META RX MOTOR CONTROLLER 7

- Actuator for CHERUBINI RX motors (white wire)
- Controls rolling shutters, awnings and screens
 - Possibility to program different intermediate positions
 - Extremely precise position recognition



A510080 META TE DIMMER 7

- Dimmer with 230 V output
- Controls the light intensity of all types of dimmable lights, including LED and energy-saving lamps
 - ON/OFF control option on non-adjustable lights and loads
 - Works with both push buttons and switches
 - No flicker of brightness at very low powers



A510081 META 4 CH PWM DIMMER 7

- 4-channel 12/24 V dc dimmer
- Controls light intensity independently on the 4 channels
 - Works with LED and halogen lamps and strips

	Power supply	Maximum charge	Consumption in the stand-by mode
A510078 META WIRED MOTOR CONTROLLER 7	110-230 V ac 50/60 Hz	5 A	< 230 mW
A510079 META RX MOTOR CONTROLLER 7	110-230 V ac 50/60 Hz	5 A	< 230 mW
A510080 META TE DIMMER 7	110-230 V ac 50/60 Hz	1 A- resistive	< 1 W
A510081 META 4 CH PWM DIMMER 7	12-24 V ac	6 A /channel - Max 13 A	< 100 mW
A510082 META DRY CONTACT SWITCH 7	110-230 V ac 50/60 Hz 24 V dc	15 A (Resistive load)	< 260 mW
A510083 META DOUBLE SWITCH-L 7	110-230 V ac 50/60 Hz 24 V dc	2 x 8 A (Resistive load)	< 260 mW
A510084 META DOUBLE SWITCH-N 7	110-230 V ac 50/60 Hz 24 V dc	2 x 8 A (Resistive load)	< 260 mW
A510085 META SINGLE SWITCH 7	110-230 V ac 50/60 Hz 24 V dc	15 A (Resistive load)	< 260 mW
A510086 META ENERGY DRIVEN SWITCH-C 7	230 V ac 50/60 Hz	12,5 A	< 260 mW
A510068 META SMART PLUG	230 V ac 50/60 Hz	12 A	< 0,4 W



A510082 META DRY CONTACT SWITCH 7

- Single channel relay and dry contact
- Switching on/off equipment with independent power supply, such as gas valves and irrigation systems
 - Time management both ON/OFF



A510083 META DOUBLE SWITCH-L 7 A510084 META DOUBLE SWITCH-N 7

META DOUBLE SWITCH 7

- Actuator with two independent 230 V outputs for lights and small appliances
- Available in two versions: controlled by L-phase signal (A510083) and N-neutral (A510084)
 - Independently configurable channels
 - Multiple configuration options
 - Time-controlled on and off management for both channels independently



A510085 META SINGLE SWITCH 7

- Controls energy consumption and protects against electrical failure
- Measures power, energy, voltage, current and power factor
 - If the energy consumed exceeds the set threshold, the load is disconnected
 - Control of heavy loads



A510086 META ENERGY DRIVEN SWITCH-C 7

- Controls energy consumption and protects against electrical failure
- Version 10 kW > for the whole house
 - Controls both the energy consumed and the energy produced
 - Measures power, energy, voltage, current and power factor
 - Customisation of load control according to measured energy
 - Control of heavy loads



A510068 META SMART PLUG

- Controlled socket for any household appliance and equipment up to 12 A
- Multicoloured LED for operation feedback
 - Overvoltage and overcurrent detection
 - Overload protection
 - Integrates an energy consumption meter

CHARACTERISTICS

Radio protocol	Z-Wave 700 Series
Maximum distance in open space	100 m
Maximum distance indoors	40 m
Operating temperature	-10 °C +40 °C
Dimensions	37x37x17 mm
Dimensions META SMART PLUG	64x44x44 mm
Protection degree	IP20

MAGO

The Bluetooth® system for rolling shutters



MAGO APP FOR CONTROLLING ROLLING SHUTTERS, BLINDS AND SCREENS

MAGO is the Bluetooth® system for managing the movement of all the sun protection systems in the house via smartphone.

Installation is easy: MAGO can be used both in new buildings and in renovations, as a standard system with wired motors.

The end user after downloading the application to his smartphone can autonomously set up the system without any installer action.

With the MAGO system you can:


- **Use** your smartphone as a remote control.
- **Program** your rolling shutters and awnings, and also turn on lights and appliances, in a completely independent way and without technical assistance.
- **Customise** the App, creating groups, scenes and rooms, to meet specific needs.
- **Increase** the installation control range thanks to interaction among connected MAGO devices.

Available for mobile iOS and Android operating systems.



MAGO

The Bluetooth® system for rolling shutters

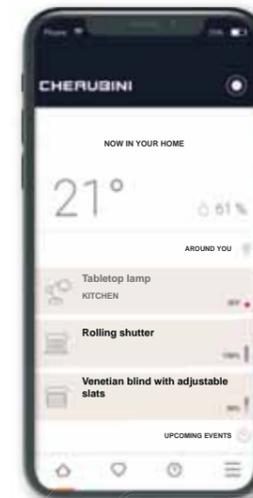

MAGO CONTROL SYSTEM

The App recognizes the items connected to the system and controls them.

MAGO Switch and MAGO Control unit:

Rolling shutter, awnings, screens, venetian blinds and adjustable shutters control.

Via the specific MAGO devices, turning on and off of:

- Light sources and LED dimmer adjustment
- Boiler
- Household appliances
- Air conditioning



DIARY MANAGEMENT

Both individual items and scenes can be operated either directly or through the App diary programming.



PROGRAMMABLE FUNCTION

Your smartphone becomes the domotic system of your house.

The App on your smartphone can be user-customised to combine individual items into groups.

Types of grouping:

- **Homogeneous groups of items:** rolling shutters, awnings, lights.
- **Rooms:** living room, kitchen, bedroom.
- **Scenes:** evocative settings can be created through the programmed adjustment of the connected items. The scenes can be activated automatically, by programming the diary, or on demand.

MAGO

The Bluetooth®
system for rolling shutters



A SMART NETWORK FOR YOUR HOME

The MAGO system consists of several elements with specific functions. Each Bluetooth® device relays the controls of the other actuators and implements any controls intended for it.

A510051

MAGO CONTROL UNIT

Built-in control unit suitable for piloting standard and non-standard wiring motors. It can be used for rolling shutters, awnings, screens, venetian blinds and adjustable shutters.
Possible connection to an external control button.



A510048

MAGO ACTUATOR

On/Off actuator designed for turning on and off lights and household appliances.
Possible connection to an external control button.



A510047

MAGO DIMMER

Low-voltage device, it controls 2 12 or 24 V LED strips.
Possible connection to an external control button.



MAGO

The Bluetooth®
system for rolling shutters



A510046

MAGO SWITCH

Wall-mounted switch suitable for piloting standard wiring motors.
It can be used for rolling shutters, awnings, screens and venetian blinds.




MAGO DEVICES

Code	Model
A510046	MAGO SWITCH
A510051	MAGO CONTROL UNIT
A510048	MAGO ACTUATOR
A510047	MAGO DIMMER

CHARACTERISTICS

	MAGO SWITCH A510046	MAGO CONTROL UNIT A510051	MAGO ACTUATOR A510048	MAGO DIMMER A510047
Power supply	110-230V ac	110-230V ac	110-230V ac	12-24V dc
Max. motor power	500 W	500 W	--	--
Max. power load	--	--	2 x 500 W resistive	2 x 60 W (12V) 2 x 120 W (24V)
Transmission frequency	2,4 GHz	2,4 GHz	2,4 GHz	2,4 GHz
Decoder system	Bluetooth® 4	Bluetooth® 4	Bluetooth® 4	Bluetooth® 4
Operating temperature	-10 °C +55 °C	-10 °C +55 °C	-10 °C +55 °C	-10 °C +55 °C
Dimensions (mm)	78 x 78 x 28	48,5 x 48,5 x 22	48,5 x 48,5 x 22	48,5 x 48,5 x 22
Weight	62 g	30 g	30 g	30 g
Protection degree	IP20	IP20	IP20	IP20

DOMOTIC RECEIVERS



A510031 POWER ONE



A510032 DUO
A510033 DUO BT



A510042 POWER ONE 2C



A510043 POWER ONE 2M



A510073 DIMMER LED RX

The Power One and Duo domotic receivers enable the control of low- and mid-power electric appliances using lines power or low voltage power (e.g. incandescent lamps, etc.) by way of a Cherubini remote control. The Duo BT receiver provides the same functionality but with a 12 or 24 V power supply. All 3 receivers have a dry contact output. The domotic receivers Power One 2C and 2M enable the control of powerful electrical equipment such as halogen lamps or infrared heaters. Also suitable for the control of specific devices, such as Power supplies for LED lights or fluorescent light tubes, etc. The low-voltage Dimmer LED RX allows LED bars to be controlled via 2 channels, configuring the 2 outputs with 2 different modes: 1D with one duplicate load, or 2L with 2 independent loads.

VERSIONS

Code	Model	Function
A510031	POWER ONE	Mid-power appliances
A510032	DUO	Low-power appliances
A510033	DUO BT	Home automation systems in low voltage
A510042	POWER ONE 2C	High powered electrical devices - wired
A510043	POWER ONE 2M	High powered electrical devices - with terminal board
A510073	DIMMER LED RX	Dimmer control for LED

CHARACTERISTICS

	A510031 POWER ONE	A510032 DUO	A510033 DUO BT
Power supply	220 V ac	220 V ac	12/24 V ac/dc
Maximum power 220 V ac	1000 W resistive	2x500 W resistive	2x500 W
Operating temperature	-10 °C +50 °C	-10 °C +50 °C	-10 °C +50 °C
Dimensions	40 x 40 x 20 mm		
Protection degree	IP44	IP44	IP44
Radio frequency	433,92 MHz	433,92 MHz	433,92 MHz

	A510042 POWER ONE 2C A510043 POWER ONE 2M
Power supply	220 V ac
Maximum power 220 V ac	2000 W halogen lamps and heaters 500 W LED and fluorescent lamps
Operating temperature	-10 °C +50 °C
Dimensions	120 x 35 x 20 mm
Protection degree	IP44
Radio frequency	433,92 MHz

	A510073 DIMMER LED RX
Power supply	12/24 V ac/dc
Maximum power	12 V 2x60 W - 24 V 2x120 W
Operating temperature	-10 °C +50 °C
Dimensions	48,5 x 48,5 x 22 mm
Protection degree	IP20
Radio frequency	433,92 MHz

POWER ONE A510031

Suitable for powering medium wattage loads (e.g. lighting components)
- Input for button or control switch.
- Stable or timed output.

- 1- Brown - Phase
- 2- Blue - neutral
- 3- White - Wired switch (optional)
- 5- Black - Output 1
- 6- Black - Common

DUO A510032 DUO BT A510033

Suitable for running two independent loads, or else a diverted low power load (e.g. lighting).
- Input for button or control switch.
- Stable or timed output.

- 1- Brown - Phase/Power +
- 2- Blue - Neutral/Power -
- 3- White - Wired switch (optional)
- 4- Green - Output 2
- 5- Yellow - Output 1
- 6- Red - Common





POWER ONE 2C A510042 POWER ONE 2M A510043

Suitable for the control of electrical devices such as high-performance halogen lamps or infrared heaters.
- Input for button or control switch.
- Stable or timed outputs.

- ON POWER
 - N - Blue - neutral
 - L1 - Brown - Phase
 - L2 - White - Wired switch (optional)
 - PE - Yellow / Green - Earth
- ON DEVICE
 - N - Blue - Neutral
 - M1 - Brown - Phase
 - PE - Yellow / Green - Earth

DIMMER LED RX A510073

Suitable for controlling LED lighting systems with 2 separate outputs, configurable as 2 channels with a duplicate load (1D) or 2 independent loads (2L).

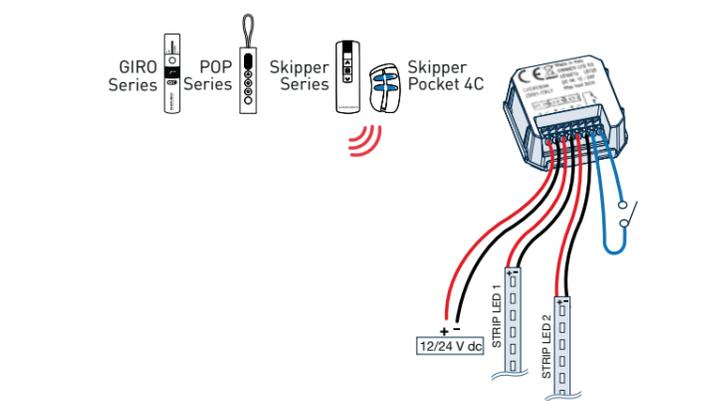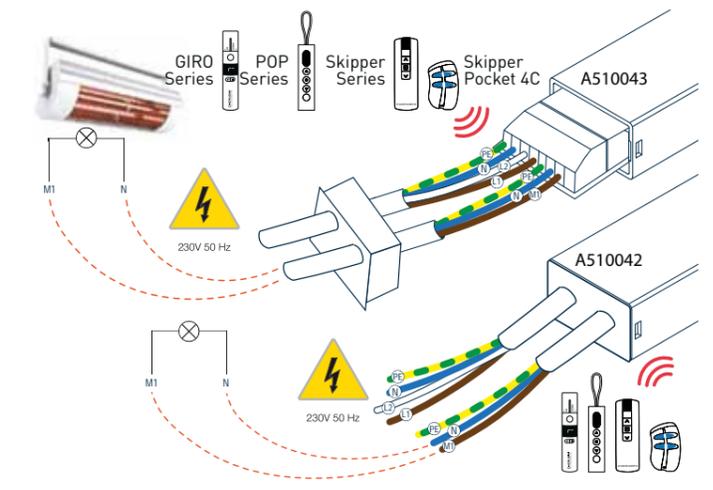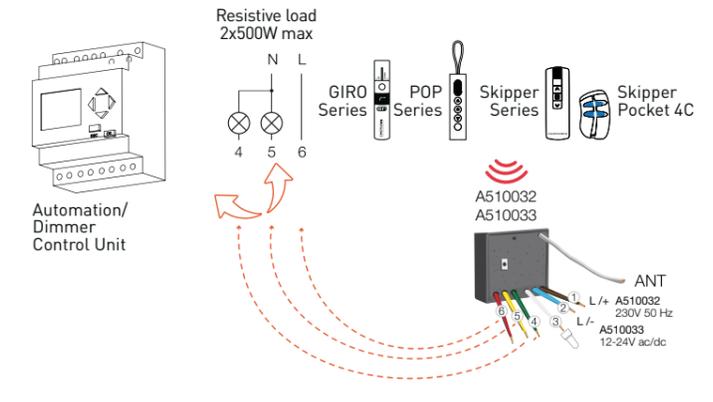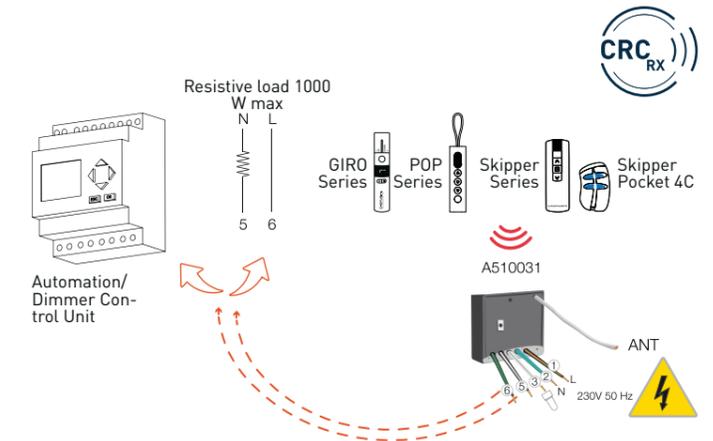

BUS MODULES

command and centralisation modules

A510023 BLUE BUS

A510024 BLUE BUS RX

A510025 BLUE BUS TDS

A510026 BLUE BUS TDS RX



Centralised control via a bus

Allows the central command of different range of motors. Allows the central command of different range of motors. Allows individual and general operation of an installation using low-voltage signals transmitted over a bus cable.

Versatile

Compatible with the entire Cherubini motorisation series, both mechanical and electronic motors.

Many applications

Can also be used in mixed systems
Blue Bus / Blue Bus RX: rolling shutters, adjustable shutters, screens,...
Blue Bus TDS / Blue Bus TDS RX: awnings, rolling shutters, screens,...

Several operating modes

Simultaneous mode:

After an order is transmitted from a central control, all actuators respond simultaneously.

Sequential mode:

The actuators respond in sequence to a command from the central control unit.

Safety (BLUE BUS / BLUE BUS RX)

The module has an input for security devices (fire alarms, intruder detectors, etc).

Climatic controls (BLUE BUS TDS / BLUE BUS TDS RX)

The module includes inputs for Cherubini climatic controls: anemometer WindTec SC and rain sensor Goccia to Blue Bus TDS and Blue Bus TDS RX; anemometers WindTec and WindTec Lux, wireless wind sensor Mistral and rain sensor Rugiada to Blue Bus TDS RX.

Optional connections

Possibility of connecting an Up/Down button for local and centralised command.


VERSIONS

Code	Model	Function
A510023	BLUE BUS	Bus module
A510024	BLUE BUS RX	Bus module with built-in receiver
A510025	BLUE BUS TDS	Bus module for Awnings
A510026	BLUE BUS TDS RX	Bus module with built-in receiver for awnings


CHARACTERISTICS

	BLUE BUS BLUE BUS TDS	BLUE BUS RX BLUE BUS TDS RX
Power supply	110 V - 230 V ac	110 V - 230 V ac
Power	2 W	2 W
Max. motor power	500 W	500 W
Operating temperature	-10 °C +55 °C	-10 °C +55 °C
Weight	300 g	300 g
Dimensions	80x80x45 mm	80x80x45 mm
Protection degree	IP44	IP44
Radio frequency	-	433,92 MHz
Decoder system	-	Rolling Code
Modulation	-	AM/ASK
Storage capacity	-	15

INSTALLATION DIAGRAM

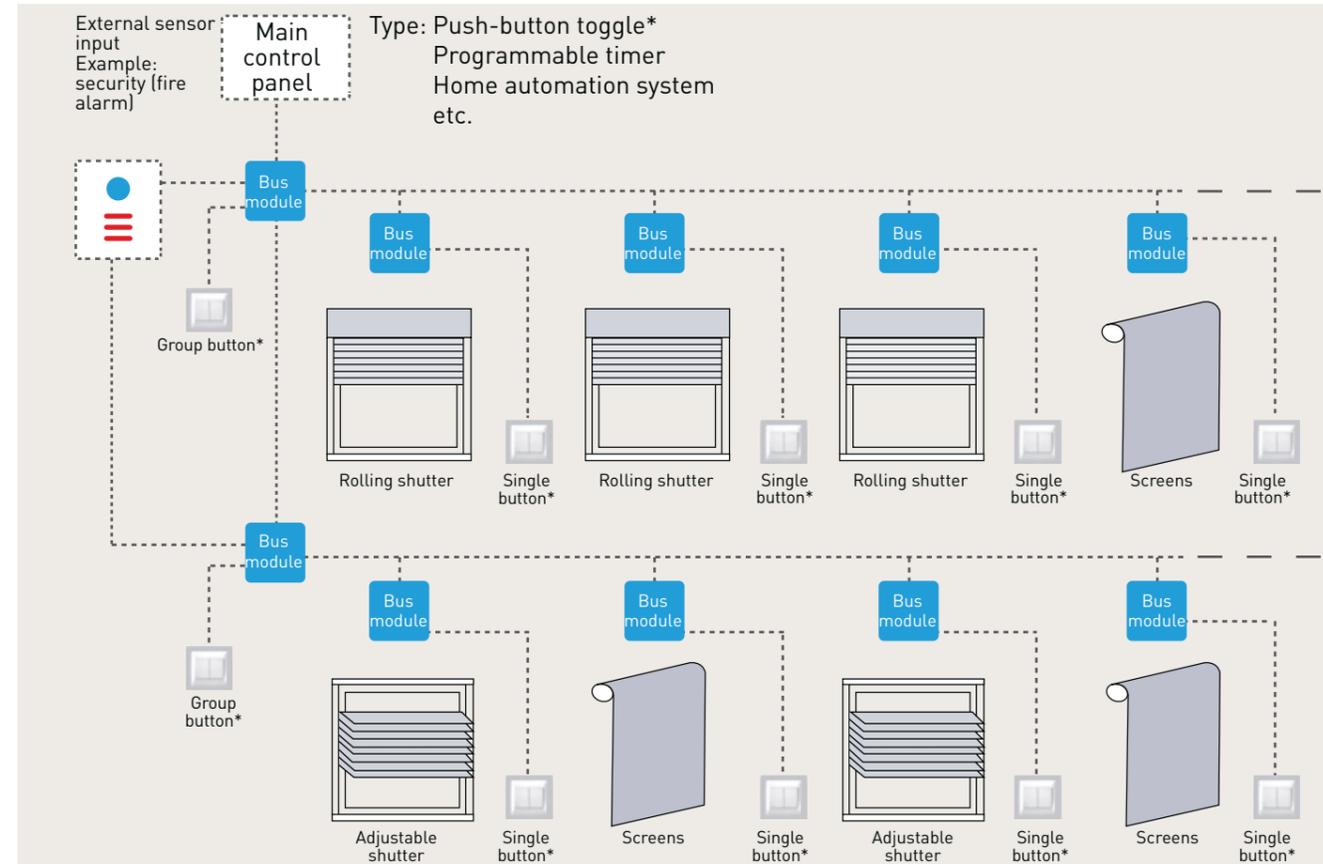

BLUE BUS / BLUE BUS RX

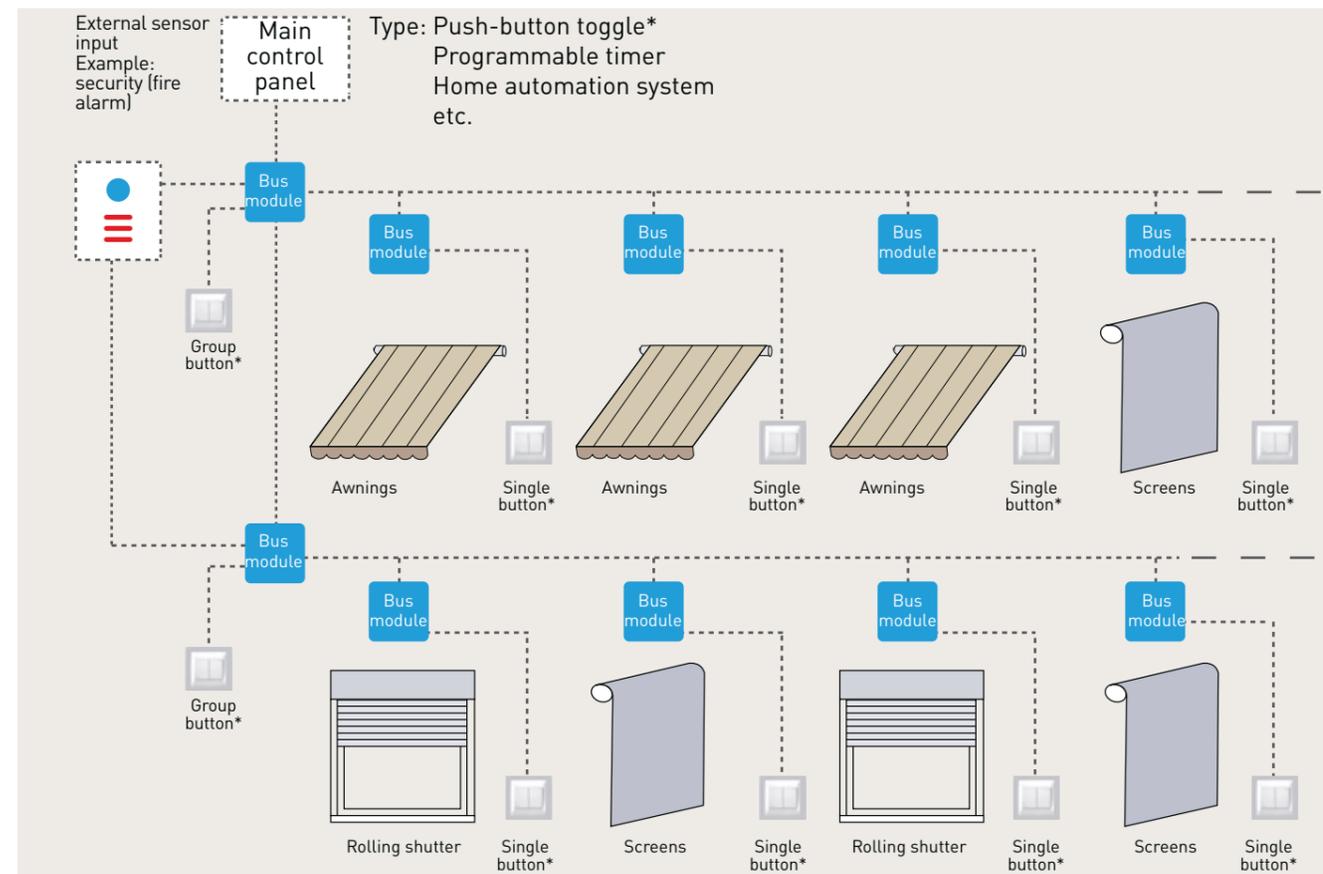

BLUE BUS TDS / BLUE BUS TDS RX

* It is preferable to use a switch type unstable.


EXPANSION MODULE




A510008

It gives the possibility of grouping 2 motors together and of activating them individually or together. Possibility of interconnecting modules.

EXAMPLE OF SEQUENTIAL CENTRALISATION WITH BUS AND EXPANSION MODULES

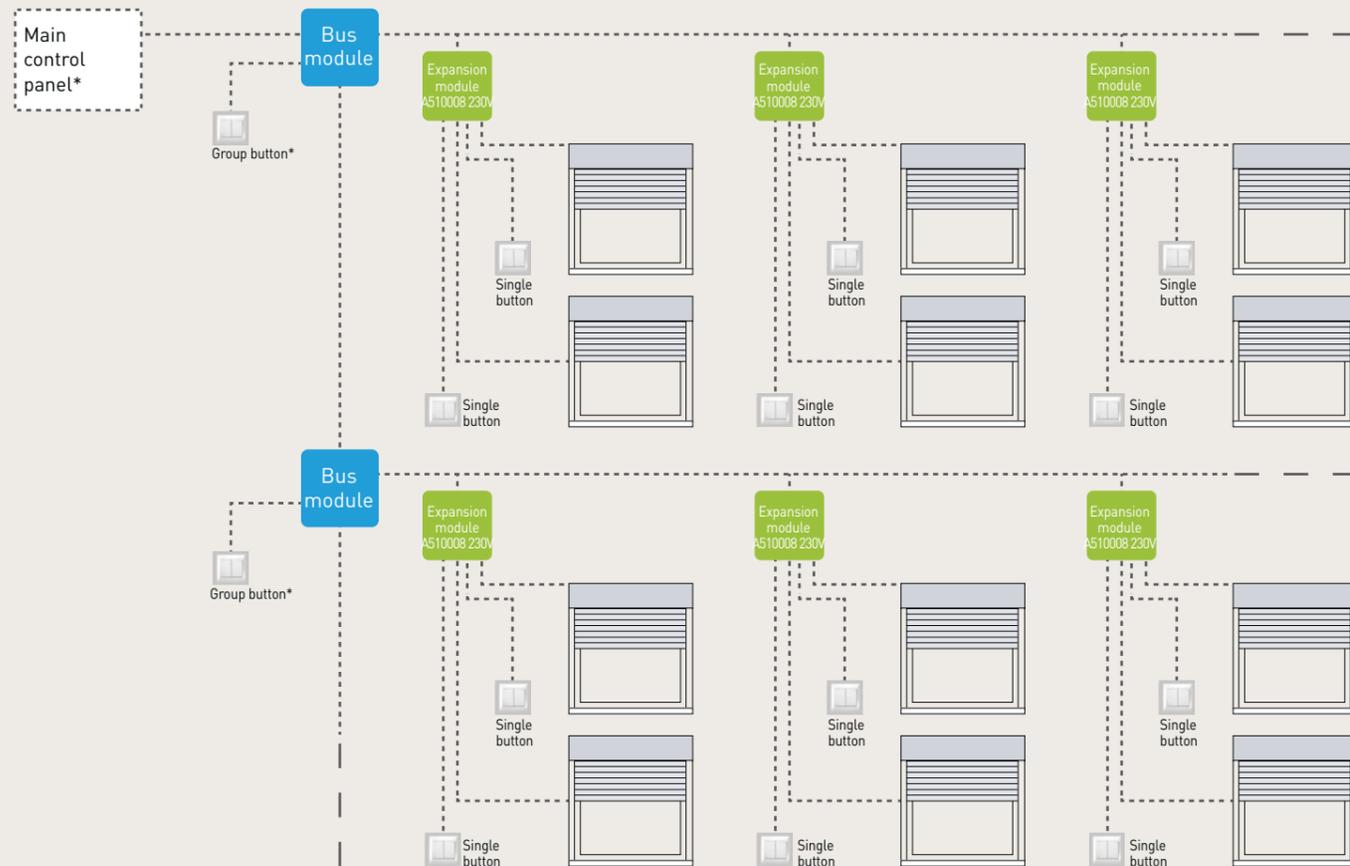

EXAMPLE OF CENTRALISATION WITH EXPANSION MODULES

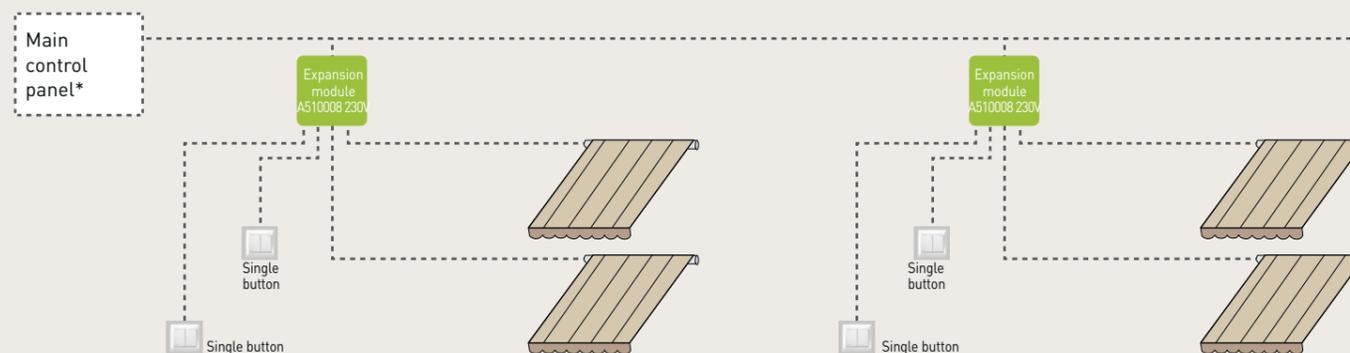

* For the Main control panel and the Bus module, it is preferable to use a switch type unstable.

DOMOTIC TRANSMITTER



A530065




- This interface allows to adapt the Cherubini radio systems to the home automation control unit.
- Compatible with all Cherubini radio systems: motors equipped with the white wire (Tronic RX, Wave RX, Senso RX, Clima Plus RX, P&P Short RX, ecc...) and radio receivers (TDS Gold, TDS Compact, OPTime, Compact Roll, Mini, Tandem, MyRoll).

CHARACTERISTICS

Power supply	230 V ac
Power	1,5 W
Transmission frequency	433,92 MHz
Decoder system	Rolling code
Modulation	AM/ASK
Operating range in open spaces	150 m
Operating temperature	-10 °C +55 °C
Dimensions (without cables)	40x40x20 mm
Weight	80 g

WIRING DIAGRAM

- DOMOTIC CONTROL UNIT
- UP/DOWN SELECTOR

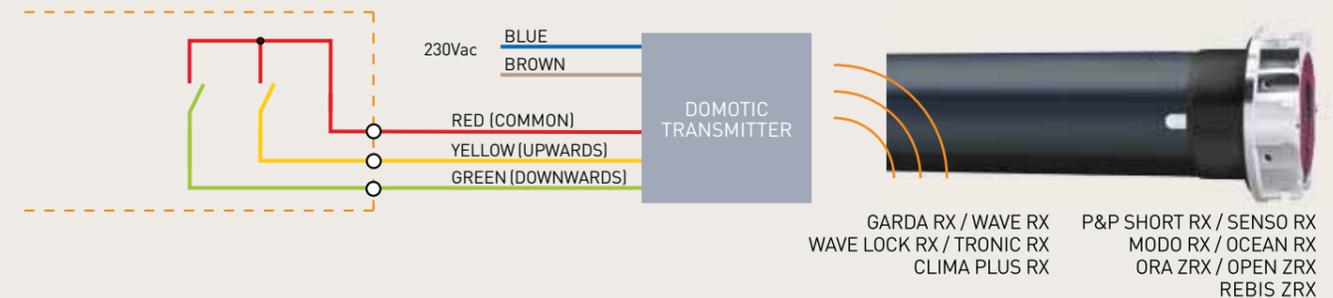

DOMOTIC ISOLATOR




A510052

This interface device allows to connect Cherubini motors equipped with the white wire (Tronic RX, Wave RX, Senso RX, Clima Plus RX, P&P Short RX, etc.) to any domotic actuators from third-party manufacturers.

- Ensures proper insulation in white wire connection.
- Ensures interlocking also in case of actuator failure.
- Powered contact actuators can also be connected.

CHARACTERISTICS

Power supply	230 V ac - 50/60 Hz
Max. motor power	500 W
Operating temperature	-10 °C +55 °C
Dimensions	48,5x48,5x22 mm
Weight	38 g
Protection degree	IP20

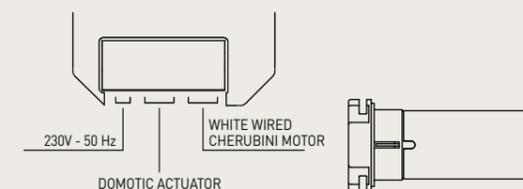

GIRO

GIRO series remote controls

The perfect balance between form and function

- Rotary switch enables a more natural control than the usual buttons.
- Long battery life.
- Dedicated programming buttons are protected in the battery compartment.
- High-brightness white channel indicator and icon display to turn light automation on/off.
- Two dedicated button switches make light automation and channel setting easier.
- Automatic close of the programming function.

Lux function

This remote control function allows you to enable or disable the solar function in motors and receivers that are compatible with WindTec Lux climate controls.

Colours:



GIRO

VERSIONS

Code	Model	Colour
A530067L	GIRO	Warm Gray
A530071L	GIRO	Blue
A530086L	GIRO	Burgundy
A530069L	GIRO PLUS	Warm Gray
A530073L	GIRO PLUS	Blue
A530088L	GIRO PLUS	Burgundy
A530068L	GIRO LUX	Warm Gray
A530072L	GIRO LUX	Blue
A530087L	GIRO LUX	Burgundy
A530070L	GIRO P-LUX	Warm Gray
A530074L	GIRO P-LUX	Blue
A530089L	GIRO P-LUX	Burgundy

CHARACTERISTICS

Power batteries (included)	2 x LR03 (AAA)
Transmission frequency	433,92 MHz
Decoder system	Rolling code
Operating range in open spaces	150 m
Operating temperature	-10 °C +50 °C
Dimensions (mm)	160 x Ø30
Weight (with batteries)	100 g



GIRO

- One-channel remote control, for one receiver or one group of receivers.
- Frontal high-brightness white LED indicator lamp.
- Dedicated programming buttons and rear LED indicator lamp.

GIRO PLUS

- Multi-channel remote control with 7 individual channels and one global channel.
- Allow the display to show only the channels in use.
- Dedicated forward/back channel switching buttons.
- Frontal high-brightness white numerical display.
- Dedicated programming buttons and rear LED indicator lamp.

GIRO



GIRO PLUS



GIRO LUX

- One-channel remote control with activation/deactivation of the Lux function.
- Dedicated buttons to turn light automation on/off.
- Frontal high-brightness white LED indicator lamp with icons.
- Dedicated programming buttons and rear LED indicator lamp.

GIRO P-LUX

- The Lux function allows you to enable or disable the solar function individually or globally in channel 0.
- Multi-channel remote control with 7 individual channels and one global channel.
 - Allow the display to show only the channels in use.
 - Frontal high-brightness white LED indicator lamp with numerical display and icons.
 - Dedicated programming buttons and rear LED indicator lamp.

GIRO LUX



GIRO P-LUX



POP

POP series remote controls



Handy, essential and customizable in six colours

- Coloured closing caps with removable matching cord.
- Wall support with countersunk-head screw.
- Easy-to-read white LED display.
- Long-lasting and easy-to-replace AAA batteries included.



Programming

- Hide unused channels function available.
- Automatic close of the programming function.



Colours:

casing closing cap/cord



Customization Kit

Made of 5 different colours closing caps and matching cords, the kit allows the end-user to customize and mark the different remote controls of the house.



POP



VERSIONS

Code	Model	Colour
A530126	POP	■
A530127	POP	■
A530138	POP PLUS	■
A530139	POP PLUS	■
A530132	POP LUX	■
A530133	POP LUX	■
A530144	POP P-LUX	■
A530145	POP P-LUX	■

CHARACTERISTICS

Power supply	2,4V - 3V dc
Type of battery	2 x LR03 (AAA)
Transmission frequency	433,92 MHz
Modulation	AM/ASK
Decoder system	Rolling code
Operating range in open spaces	100 - 150 m
Operating temperature	-10 °C +50 °C
Dimensions (mm)	132 x 32 x 16
Weight (with batteries)	63 g

Kit Code

Kit Code	Colours
A4508_0L60	Closing caps and cords

Display case code

A540012	Case containing two non-transmitting remote controls, wall bracket, caps and interchangeable lanyards.
---------	--

POP

One-channel remote control for one receiver or one group of receivers.



POP PLUS

Multi-channel remote control with 7 individual channels and one global channel. Hide unused channels function available.



POP LUX

One-channel remote control for one receiver or one group of receivers.

The Lux control allows you to enable or disable the solar function in motors and receivers compatible with the WindTec Lux climate controls.



POP P-LUX

Multi-channel remote control with 7 individual channels and one global channel.

Option to only visualise used channels on display. The Lux control allows you to enable or disable the solar function in motors and receivers compatible with the WindTec Lux climate controls, individually or on the global channel.



GIRO WALL

GIRO series remote controls



Wall-mounted remote control

- One-channel remote control for one receiver or one group of receivers.
- Shallow and square design that can be inset into the wall.
- It includes a completely removable wall bracket.
- The bracket can be adjusted to correspond with square mounting boxes to cover over any gaps in brickwork.
- Automatic close of the programming function.

Colours:



White
RAL
9016



Anthracite
RAL
7016



VERSIONS

Code	Model	Colour
A530090L	GIRO WALL	White
A530091L	GIRO WALL	Anthracite

CHARACTERISTICS

Power supply	2,4V - 3V dc
Type of battery	1 x CR2430
Transmission frequency	433,92 MHz
Modulation	AM/ASK
Decoder system	Rolling Code
Operating range in open spaces	150 m
Operating temperature	-10 °C +50 °C
Dimensions (mm)	78 x 78 x 10
Weight	95 g

REMOTE CONTROLS



CHARACTERISTICS

Power supply	Battery 1 x CR2450
Decoder system	Rolling Code
Radio frequency	433,92 MHz
Operating range in open spaces	100 m
Dimensions (mm)	40 x 40 x 10
Weight	20 g

CHARACTERISTICS

Power supply	Battery 1 x CR2450
Decoder system	Rolling Code
Radio frequency	433,92 MHz
Operating range in open spaces	100 m
Dimensions (mm)	40 x 40 x 10
Weight	20 g

VERSIONS

Code	Model	Colour
A530054	SKIPPER POCKET	White
A530058	SKIPPER POCKET 4C	White

CHARACTERISTICS

Power supply	12V dc
Type of battery	23A/L1028
Transmission frequency	433,92 MHz
Modulation	AM/ASK
Decoder system	Rolling Code
Operating range in open spaces	150 - 250 m
Operating temperature	-10 °C +55 °C
Dimensions (mm)	81 x 46 x 16
Weight	40 g

TOUCH-1L REMOTE CONTROL

- One-channel remote control compatible with all devices bearing the CRC RX mark. Allows one motor or several motors to be controlled simultaneously.
- Can be wall mounted.

A530099



TOUCH-LOCK4 REMOTE CONTROL

- Four channel pocket remote control for all Cherubini RX motors and receivers.
- Can be carried on a key ring or in your pocket.

A530100



SKIPPER POCKET REMOTE CONTROLS

- Small remote control that can be carried on a key ring or in your pocket.
- Design and functionality allow intuitive control of the motor.

A530054 SKIPPER POCKET

One-channel remote control

A530058 SKIPPER POCKET 4C

Remote control with 4 independent channels and step-by-step operation mode



SKIPPER LCD

SKIPPER series remote controls

- Ergonomic design
- Easy to use
- Simple and intuitive programming



Visualization Graphic display
LCD RGB 1,8"

Control device type Joystick type



Multifunction 50-channel remote control with a 1,8" colour LCD display. Symbols together with the colour LCD display make handling of the remote control very intuitive for the user, with all available information clearly displayed. It supports the control of up to 50 devices and the creation of 10 scenarios and 16 groups.

Groups and automations

Using Skipper LCD remote control you can create groups and automations at home. You can group by room, floor, facade, office, ...giving each group a name of your choice and making simple to apply a centralised action to all of them at once.

Scenarios

One of the remote control's key features is the creation of scenarios. These allow you to create an appropriate environment, to reflect the circumstances, at the touch of a button (for example: (1)'Night', rolling shutters close, awnings retract (2)'Summer', rolling shutters open, awnings are set automatically, ...)

Programmable timer

To complete the functions above you have the possibility to action all of them automatically, at a predetermined time or at different times throughout the day, to simulate someone being at home. The user always has the choice to activate these actions manually or automatically.

Solar function

For installations which use the WindTec Lux (sun-wind) automated system, there's also the option to selectively activate or deactivate the solar function by individual devices, groups or scenarios.

The AAA batteries used give the transmitter a long battery life and are easy to obtain and replace.

VERSIONS

Code	Model*	Function
A530035L	SKIPPER LCD	White
A530041L	SKIPPER LCD	Black

*wall bracket supplied

CHARACTERISTICS

Power supply	2,4V - 3V dc
Type of battery	2 x LR03 (AAA)
Transmission frequency	433,92 MHz
Modulation	AM/ASK
Decoder system	Rolling code
Operating range in open spaces	100 - 150 m
Operating temperature	-10 °C +50 °C
Dimensions (mm)	140 x 45 x 25
Weight (with batteries)	100 g

SKIPPER LCD



Examples of functions

Groups


A group is a group of actuators. Groups are used to globalise functions in the quickest, most comfortable manner, so that you can program in a faster, more intuitive way.

Actuators can be grouped in any way you wish: by type of actuator (rolling shutters, awnings, screens, etc), by floor (1st floor, 2nd floor, etc), by rooms (dining room, lounge, bedrooms), etc.

You can create up to 16 groups.



examples of groups

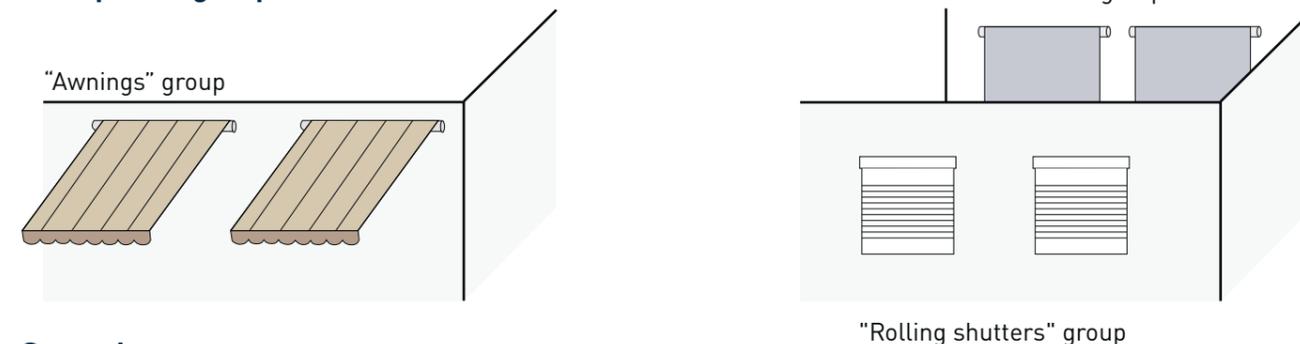

Scenarios

A scenario is a function that allows you to control several actuators or groups that you have defined. This function allows you to determine the functions that each actuator or group will carry out when you activate the scene. With the Skipper LCD transmitter, you can create up to 10 different scenes.

Examples of scenes



Night-time scene
Lower the "Rolling shutters" group
Retract the "Awnings" group
Close the "Screen" group



Summer-time scene
Driving upwards "Rolling-shutter" group
"Awnings" group in automatic operation
"Screens" group to its ideal intermediate position

SKIPPER SENSO

SKIPPER series remote controls

Ergonomic design
Easy to use
Simple and intuitive programming



Visualization Graphic display
LCD RGB 1,8"
Control device type Joystick type



One-channel remote control with integrated brightness and temperature sensor for indoor.

LCD colour screen 1,8".

Skipper Senso enables the desired light and temperature levels to be maintained inside the room. Shutters and screens will automatically adjust when the set thresholds have been reached.

During the summer months the Skipper Senso adjusts the opening and closing of rolling shutters and screens to provide protection from the sun's rays, whilst in winter it uses solar radiation to integrate the heating of the environment.

Easy to use: When desired light and temperature levels have been set by the user the remote control unit is placed in the appropriate location in the wall mounting bracket supplied.

The intuitive graphical interface ensures the Senso's ease of use.

VERSIONS

Code	Model*	Function
A530063L	SKIPPER SENSO	White

* wall bracket supplied


CHARACTERISTICS

Power supply	2,4V - 3V dc
Type of battery	2 x LR03 (AAA)
Transmission frequency	433,92 MHz
Modulation	AM/ASK
Decoder system	Rolling code
Operating range in open spaces	100 - 150 m
Operating temperature	-10 °C +50 °C
Dimensions (mm)	140 x 45 x 25
Weight (with batteries)	100 g

SKIPPER SENSO JUST THE LIGHT YOU WANT.



SYSTEM STATUS LEGEND

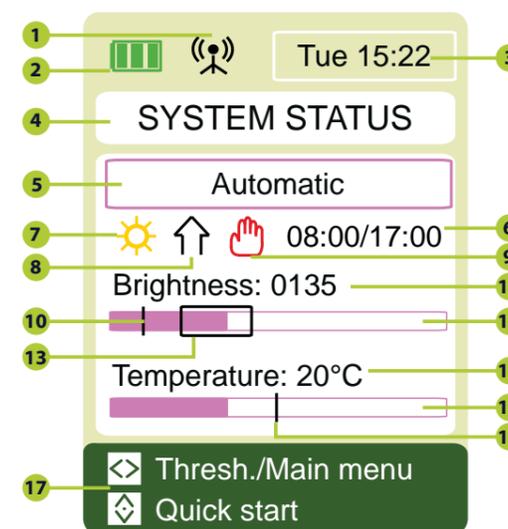

1. Command transmission indicator
2. Remote control battery level
3. System time
4. Screen name
5. Active operational mode
6. Automation operational timetable (if enabled)
7. Season option active: Summer/Winter
8. Last command sent
9. Temporarily disable automatic operation
10. Twilight threshold
11. Brightness value in real time
12. Brightness bar
13. Brightness hysteresis frame
14. Temperature value in real time
15. Temperature bar
16. Temperature intervention threshold
17. Navigation menu

WINDTEC

Climatic Controls

Ability to control the climate



Built-in radio receiver (only WindTec and WindTec Lux)
No wiring between the motor and the control unit.


Wind & Sun sensor (only WindTec Lux)
The awning works automatically and is protected from the wind.

Compatible with all series
The line of climatic control systems is compatible with all our series of motors (see Compatibility Table on page 106-107).

Reliability and safety
The high-performance "Rolling Code" decoder system works with a limited bandwidth and therefore avoids interference.

Practical
Adjustable bracket that can be mounted on a surface at any angle.

FASTENING METHODS

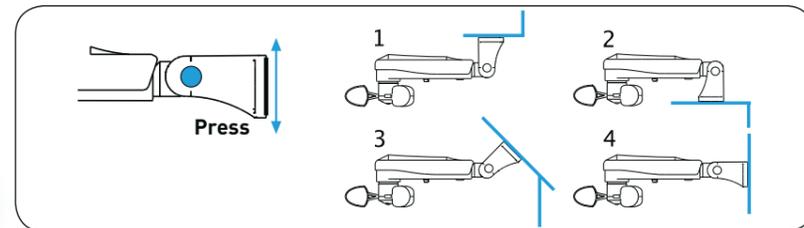

VERSIONS

Code	Model	Function
A520007	WINDTEC	Wind sensor
A520008	WINDTEC LUX	Wind and sun sensor
A520010	WINDTEC SC	Wind sensor

Code	Model	Contents
A540006	Wind RX kit	WINDTEC SC/TDS GOLD/SKIPPER
A540007	Wind kit	WINDTEC SC/TDS SILVER


CHARACTERISTICS

	WINDTEC LUX	WINDTEC LUX	WINDTEC SC
Power supply (V/Hz)	230/50	230/50	-
Radio frequency (MHz)	433,92	433,92	-
Wind sensor setting (km/h)	7,5-45	7,5-45	-
Light sensor setting (klux)	2,5-100	-	-
Dimensions (mm)	300x140x95		
Protection degree	IP33	IP33	IP33
Weight (g)	365	365	300

WINDTEC


A520007

- Wind sensor.
- Wireless connection between the motor and the radio receiver.
- Threshold adjustment directly on the device.
- Compatible with Wave RX, Senso RX, Ocean RX, Ora ZRX, Rebis ZRX motors and TDS Gold (A510020), TDS Compact (A510038) and Mini (A510036) radio receivers.

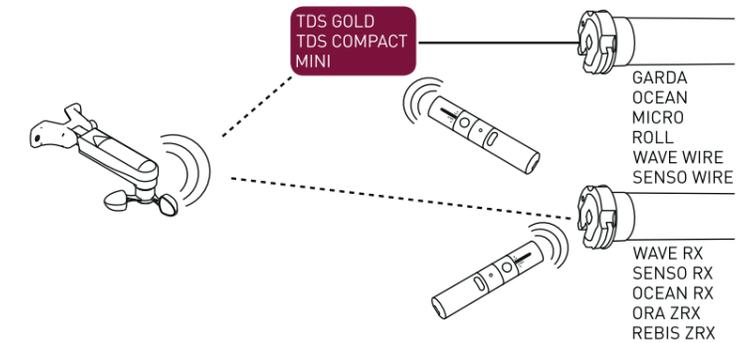


A520008

- Wind & Sun sensor.
- Wireless connection between the motor and the radio receiver.
- Thresholds adjustment directly on the device.
- Compatible with Wave RX, Senso RX, Ocean RX, Ora ZRX, Rebis ZRX motors and TDS Gold (A510020), TDS Compact (A510038) and Mini (A510036) radio receivers.

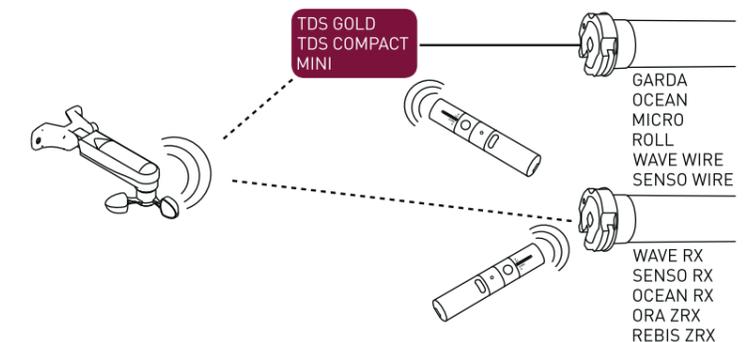

A520010

- Wind sensor.
- Direct connections through 2 wires.
- Adjustment of the wind alarm threshold from the remote control.
- Compatible with TDS Gold radio receiver (A510020) and TDS Silver control unit (A510021).

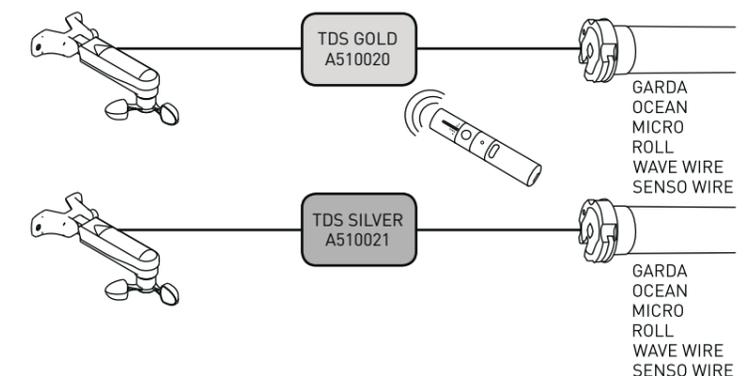

WINDTEC ANEMOMETER

WindTec Lux anemometer

WINDTEC SC ANEMOMETER

MISTRAL

Vibration wind sensor



A520012

MISTRAL

The vibration wind sensor protects the awning by detecting its movement caused by the wind.

Compatible with the Wave RX, Ocean RX, Ora ZRX motor series and with external radio receivers for awnings.


Wireless: no wiring between the motor and the sensor.

To be installed on the awning's terminal load bar.

Small size (140x38x26 mm).



OPERATIONAL DIAGRAM

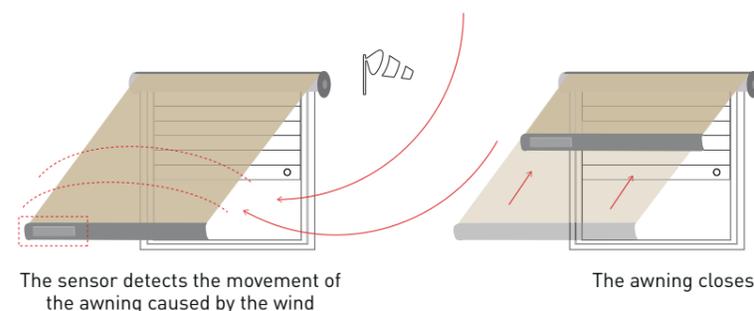

VERSIONS

Code	Model	Function
A520012	MISTRAL	Wind sensor

CHARACTERISTICS

Power supply	2,4 V-3V DC
Type of battery	2xLR03 (AAA)
Transmission frequency	433,92 MHz
Modulation	AM/ASK
Decoder system	Rolling Code
Irradiated RF power (ERP)	2 mW
Operating temperature	-10 °C +50 °C
Dimensions (mm)	140 x 38 x 26 mm
Weight (g)	100
Protection degree	IP44

RAIN-SENSOR



A520017

GOCCIA wired rain-sensor

Rain-sensor for awnings.

CHARACTERISTICS

Power supply	12V dc
Maximum charge applicable on the relay	1A
Operating temperature	-10°C +90°C
Dimensions (without cables)	120 x 60 x 20 mm
Weight	200 g




A520016

RUGIADA TX radio rain-sensor

Rain-sensor wireless set on Cherubini Domotic transmitter. The rain alarm can be set according to the individual needs, on a UP or DOWN command of the awning. Easy setting by the remote control.

OPERATIONAL DIAGRAM

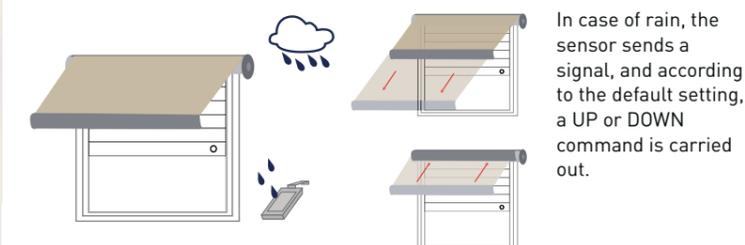

CHARACTERISTICS

Power supply	230 V ac
Power	2 W
Transmission frequency	433,92 MHz
Decoder system	Rolling code
Modulation	AM/ASK
Radio operating range	10-15 m

Control unit

Operating temperature	-10°C +55°C
Weight	300 g

Sensor element

Operating temperature	-10°C +90°C
Dimensions (without cables)	120 x 60 x 20 mm
Weight	200 g

Plastic housing

Protection degree	IP44
Dimensions (without cables)	80 x 80 x 40 mm

CONTROL UNITS

for awnings



A510038

TDS COMPACT radio receiver

The new generation radio receiver that gives added performance to wired motors with mechanical or electronic limit switches.

- Obstacle recognition during closing.
- Obstacle detection on both directions, sensitivity setting on 3 levels possible.
- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible, especially for screens and mosquito blinds.
- First intermediate position programmable from the remote control.
- Second intermediate position programmable from the remote control and controlled by the WindTec Lux light sensor.
- With cassette awnings, it is possible to set the limit switch at the stop.

Optional connections:

- Possibility to connect a switch type unstable.
- Compatible with the WindTec and WindTec Lux climatic controls and with the vibration wind sensor Mistral and with rain-sensor Rugiada.

CHARACTERISTICS

Power supply	230 V / 50 Hz
Max. motor power	600 W
Storage capacity	15 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +70 °C
Dimensions	120x35x20 mm
Protection degree	IP55



A510021

TDS SILVER control unit

- Control unit for awnings.
- Compatible with WindTec SC climatic sensor.
- Possibility of connecting an up/down button.

CHARACTERISTICS

Power supply	230 V / 50 Hz
Max. motor power	500 W
Dimensions	120x80x50 mm
Protection degree	IP55
Operating temperature	-10 °C +55 °C



CONTROL UNITS

for awnings



A510020

TDS GOLD radio receiver

- Compatible with the WindTec, WindTec Lux and WindTec SC climatic controls, with the vibration wind sensor Mistral and rain-sensor Rugiada.
- Possibility of connecting an up/down button.
- High-safety coding system "Rolling Code".

CHARACTERISTICS

Power supply	230 V / 50 Hz
Max. motor power	500 W
Storage capacity	15 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +55 °C
Dimensions	120x80x50 mm
Protection degree	IP55



A510030

TANDEM radio receiver

- Control of two motors for rolling shutters or awnings installed on the same wind-up roller.
- Inputs for up/down buttons.
- Input for anemometer WindTec and WindTec Lux.
- Input for wired anemometer WindTec SC.
- Compatible with Cherubini radio control climate sensors.

CHARACTERISTICS

Power supply	230 V / 50 Hz
Max. motor power	2x600 W
Storage capacity	7 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +55 °C
Dimensions	115x135x50 mm
Protection degree	IP54



RADIO RECEIVERS

for awnings and rolling shutters



A510036



MINI radio receiver for awnings and rolling shutters

The smallest radio receiver in the Cherubini line (40x40x20 mm). It can be inserted in a built-in socket.

- Input up/down button.
- Compatible with the WindTec and WindTec Lux climatic controls and with the vibration wind sensor Mistral and with rain-sensor Rugiada.

CHARACTERISTICS

Power supply	230 V / 50 Hz
Max. motor power	300 W
Storage capacity	15 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +55 °C
Dimensions	40x40x20 mm
Protection degree	IP44

A510062



MYROLL radio receiver for rolling shutters

- 3 level adjustable time-out time.
- Possibility of connecting an up/down button.
- It can be inserted in a built-in socket.
- High-safety coding system "Rolling Code".

CHARACTERISTICS

Power supply	230 V / 50 Hz
Radio frequency	433,92 MHz
Decoder system	Rolling Code
Modulation	AM/ASK
Storage capacity	15
Max. motor power	500 W
Operating temperature	-10 °C +55 °C
Dimensions	48,5x48,5x22 mm
Weight	30 g

RADIO RECEIVERS

for rolling shutters



A510039 - A510040
A510037

OPTIME AND COMPACT ROLL radio receivers

OPTime and Compact Roll: the new generation radio receivers that give added performance to wired motors with mechanical or electronic limit switches.

- Obstacle recognition either upwards or downwards.
- Obstacle detection on both directions, sensitivity setting on 3 levels possible.
- "Super-sensitivity" function on obstacle detection (downwards), set by remote control, setting on 3 levels possible.
- Two intermediate positions that are programmable and usable from the remote control.
- With security devices it is possible to set the limit switch at the stop.

Optional connections:

Possibility to connect a switch type unstable.

The OPTime radio receiver is also available for motors with Easy-connector.



A510039 OPTIME



A510040 OPTIME EASY



A510037 COMPACT ROLL

CHARACTERISTICS

OPTime A510039 - A510040

Power supply	230 V / 50 Hz
Max. motor power	300 W
Storage capacity	15 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +70 °C
Dimensions	114x35x20 mm
Protection degree	IP44

Compact Roll A510037

Power supply	230 V / 50 Hz
Max. motor power	600 W
Storage capacity	15 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +70 °C
Dimensions	120x35x20 mm
Protection degree	IP55

ORIENS CRC

Radio receiver for venetian blind

A510034 - A510035



A510034



A510035

ORIENS CRC radio receiver

- Easy adjustment of slat inclination.
- EU and US mode controls and the innovative CHERUBINI mode that enables the slats to be adjusted and to quickly and intuitively raise and lower the blinds.
- Possibility of memorising an intermediate position and a Privacy position.
- Easy programming: the motor confirms all the steps by means of small rotations.

Versatile

- Fits to all Venetian blind motors with mechanical or electronic limit switch.
- Fits to all tilters with or without the third position system.

Compatibility:

- Compatible with all Cherubini remote controls.
- Compatible with WindTec climatic controls.

Optional connections:

- Input for double switch or for "up/down" control switch.

A510034

Power supply cable with Hirschmann STAS 3 connector.
Motor cable with Hirschmann STAK 3 connector.

A510035

Standard 4 wire cable for power supply and motor.

CHARACTERISTICS

Power supply	110 / 220 V ac
Max. motor power	600 W
Storage capacity	15 remote controls
Radio frequency	433,92 MHz
Operating temperature	-10 °C +70 °C
Dimensions	120x35x20 mm
Protection degree	IP55



TIMERS

A510074



TIMER RADIO

- Multi-channel timer remote control
- 6 channels with timer function.
- Possibility of programming a daily opening and closing command for each channel.
- Centralised control for the 6 channels.
- ASTRO function.
- 4 ways of using the timer.
- Magnetic attachment to the base for easy use.

CHARACTERISTICS

Power supply	Battery CR2450
Operating temperature	0 °C +50 °C
Transmission frequency	433,92 MHz

A510027



TIMER ROLL

- Timer with automatic, manual and holiday operational modes.
- Day/Time programming.
- Memorised positions: 2 (up/down).
- Graphic icon display.

A510029

TIMER ROLL PLUS ASTRO with season function compatible with sensor*

- Timer with automatic, automatic-seasonal, manual and holiday operational modes.
- Week/Time programming with connection to sensor.
- Memorised positions: 7 up, 7 down 2 sensor values.
- May be connected to light sensors.
- Graphic icon display.

A510027 and A510029 clocks can be used only with 70x70x50 mm recesses

VERSIONS

Code	Description
A510027	Programmable timer
A510029	Timer with season function compatible with sensor*
A520013	Light sensor, cable 2 m
A520014	Light sensor, cable 5 m

* the sensor must be ordered separately

CHARACTERISTICS

Power supply	230V/50Hz
Operating temperature	-5 °C +45 °C
Operating time	2,5 min

A510703



ROLLMAT PLUS G/S

- Timer for manual or automatic control of motorized rolling shutters with housing into the belt winder hole.
- Daily program.
- Weekly program.
- Holiday program / random presence simulation.
- Automatic change of season, summer / winter.
- ASTRO function.
- Power supply 230V/50Hz.

COMPATIBLE SENSORS

Code	Description
A520700	Light sensor Rollmat/Rolltec, cable 1 m
A520701	Light sensor Rollmat/Rolltec, cable 2 m

ELECTRICAL ACCESSORIES



A510019

"COMFORT" signal repeater



- It repeats the remote control signal.
- Ideal for critical environmental conditions.
- Direct power supply from a Schuko socket.



A510009

Multiple control relay

- It gives the possibility of activating the motor from one or more buttons in the "step-by-step" mode.



A530066

Universal programming cable


- Convenient and simple system for assembly and adjustment of the motors with mechanical or electronic limit switches.



standard cabling



cabling for electronic limit switches



ELECTRICAL ACCESSORIES



A510700

SOLEXA radio control unit for awnings, venetian blinds and roller screens

- Sun, Wind and Rain sensor.
- Indoor temperature sensor to control shading.
- Outdoor temperature sensor.
- Possibility to set the preferred shading position.
- The opening angle of Venetian blind slats can be set.
- Large, easy to read display.
- Because of its being radio controlled and battery powered the control unit can be installed wherever it is needed.
- Weather station included.

CHARACTERISTICS

Control device type

Power supply	2 x 1,5 V (2 batteries AA/Mignon/LR6) or 2 x 1,2 V (2 batteries, AA/Mignon/LR6)
Dimensions	103×98×28 mm
Weight	170 g (including batteries)
Operating temperature	0°C +50°C
Protection degree	IP40
Radio frequency	868,2 MHz



Weather station

Power supply	230 V / 50 Hz
Dimensions	96×77×118 mm
Weight	260 g
Operating temperature	-30°C +60°C
Protection degree	IP44
Radio frequency	868,2 MHz



Available only for the German market.



"To be at the customer's side with products and services designed according to real needs, with attention to every detail, right down to the creation of tailor-made solutions".

*Michele Cavati
Electronic design office*

ACCESSORIES

adapters

MOTORS SERIES Ø35

p. 146

MOTORS SERIES Ø45

p. 147

MOTORS SERIES Ø58

p. 149

brackets

MOTORS SERIES Ø35

p. 150

MOTORS SERIES Ø45

p. 151

For all motors with universal head without shoulders

MOTORS SERIES Ø45

p. 153

For all motors with universal head with shoulders and previous head

MOTORS SERIES Ø45 - OCEAN

p. 155

MOTORS SERIES Ø45 - PLUG&PLAY SAFE EASY

p. 156

MOTORS SERIES Ø58

p. 157

other accessories

ACCESSORIES FOR MANUAL OPERATION

p. 158

ACCESSORIES FOR VENETIAN BLINDS

p. 159

SAFETY STOPS

p. 160

ADAPTERS FOR Ø35 MOTORS

Octagonal	<p>A3505_0501 Adapters Octagonal 40 (External tube notch)</p>	<p>A3505_0502 Adapters Octagonal 40 (Internal tube notch)</p>	
	<p>A3505_0503 Adapters Round 40 th. 2 mm</p>	<p>A3505_0506 Adapters Round 40 th. 1 mm</p>	<p>A3505_0510 Adapters Round 40 th. 1.5 mm, with tooth</p>
Round	<p>A3505_0511 Adapters Round 40 th. 1.5 mm</p>	<p>A3505_0515 Adapters Round Filtersun 44</p>	<p>A3505_0516 Adapters Round Hunter Douglas 47</p>
	<p>A3505_0504 Adapters ZF 45</p>	<p>A3505_0507 Adapters Delfin 44 and Acmeda 44</p>	
	<p>A3505_0508 Adapters Oval 42x46</p>	<p>A3505_0509 Adapters Benthin 52</p>	
Others	<p>A3505_0513 Adapters Round 49 Mottura</p>	<p>A3505_0505 Ring adapter 35 mm - 45 mm. Allows to use all adapters of series 45. N.B. All adapters of the series 45 fit on the output!</p>	

ADAPTERS FOR Ø45 MOTORS

Ogives	<p>A4505_0525 Adapters RollerBat 63</p>	<p>A4505_0518 Adapters Oval 70 Selt</p>	<p>A4505_0519 Adapters tube 70 reduced Ogive</p>
	<p>A4505_0520 Adapters Oval 70 Selt and RollerBat 70</p>	<p>A4505_0521 Adapters Ogive 78 + Flat Ogive 78</p>	
Round	<p>A4505_0514 Adapters Round 50 Thoni</p>	<p>A4505_0528 Adapters Delfin 52-58-70</p>	
	<p>A4505_0505 Adapters Round 50</p>	<p>A4505_0506 Adapters Round 60</p>	<p>A4505_0515 Adapters Round 70</p>

ADAPTERS FOR Ø45 MOTORS












Octagonal	<p>Octagonal 52</p> <p>A4505_0511 Adapters Octagonal 52</p>	<p>Octagonal 60</p> <p>A4505_0510 Adapters Octagonal 60 th. 1 mm</p>	<p>Star-shaped 60</p> <p>A4505_0512 Adapters Star-shaped 60</p>
	<p>Octagonal 70</p> <p>A4505_0502 Adapters Octagonal 70</p>	<p>Octagonal 60</p> <p>A4505_0531 Adapters Octagonal 60 th. 0,6 mm</p>	<p>Octagonal 60 up to 20 Nm</p> <p>A4505_0532 Adapters Octagonal 60 th. 0,6 mm, reduced thickness</p>
	<p>Deprat 53</p> <p>A4505_0508 Adapters Deprat 53</p>	<p>Deprat 62/Welser 63</p> <p>A4505_0507 Adapters Deprat 62/Welser 63</p>	<p>Deprat 89</p> <p>A4505_0516 Adapters Deprat 89</p>
ZF	<p>ZF 54</p> <p>A4505_0508 Adapters ZF 54</p>	<p>ZF 64</p> <p>A4505_0509 Adapters ZF 64</p>	<p>ZF 80</p> <p>A4505_0517 Adapters ZF 80</p>
	<p>Acmeda 60</p> <p>A4505_0522 Adapters Acmeda 60</p>	<p>Dalex 63 + 80 / Eurothema 60 / Gibus D58 / RollerBat 56 / Soprofen 53 + 54</p> <p>A4505_0524 Drive pulley suitable for multiple profiles</p> <p>Dalex 80 Dalex 63 Eurothema 60 Gibus D58 RollerBat 56 Soprofen 53/54</p>	
	<p>Others</p>		

ADAPTERS FOR Ø58 MOTORS

Ogives	<p>Ogive 78</p> <p>A5805_0502 Adapters Ogive 78</p>	<p>Ogive 78 flat</p> <p>A5805_0513 Adapters Flat Ogive 78</p>	<p>Ogive 85</p> <p>A5805_0503 Adapters Ogive 85</p>	<p>Ogive 100</p> <p>A5805_0516 Adapters Ogive 100 Stobag</p>	
	<p>Round 63</p> <p>A5805_0509 Adapters Round 63</p>	<p>Round 70</p> <p>A5805_0508 Adapters Round 70</p>	<p>Round 72</p> <p>A5805_0514 Adapters Round 72 Gibus LS60 (Øe 72)</p>		
	<p>Round 75</p> <p>A5805_0511 Adapters Round 75 Matest</p>	<p>Round 98</p> <p>A5805_0510 Adapters Round 98</p>	<p>Round 102</p> <p>A5805_0507 Adapters Round 102</p>		
	<p>Octagonal 70</p> <p>A5805_0501 Adapters Octagonal 70</p>	<p>Octagonal 102</p> <p>A5805_0506 Adapters Octagonal 102 Welser</p>	<p>Octagonal 125</p> <p>A5805_0512 Adapters Octagonal Heroal 125</p>		
Others	<p>ZF 80</p> <p>A5805_0504 Adapters ZF 80</p>	<p>RollerBat 80</p> <p>A5805_0515 Adapters RollerBat 80</p>	<p>Deprat 89</p> <p>A5805_0505 Adapters Deprat 89</p>		

BRACKETS FOR MOTORS Ø35





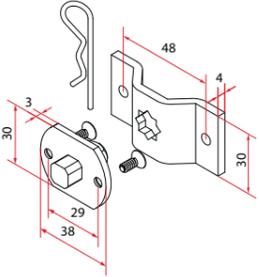
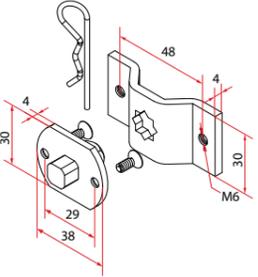


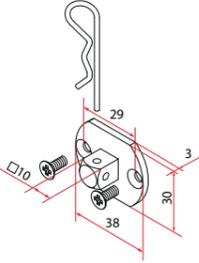





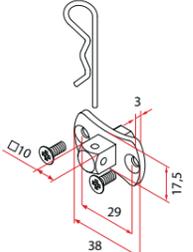


all motor torques			
 <p>A3506_0551 10 mm square pin with omega bar, through holes</p>	 <p>A3506_0552 10 mm square pin with omega bar, M6 holes</p>	 <p>A4506_0621 Omega bar for 10 mm square, with M6 holes</p>	 <p>A3506_0557 RTPFL support plate</p>
 <p>A3506_0555 Flanged 10 mm square pin</p>	 <p>A3506_0553 Fixing plate for side covers</p>	 <p>A3506_0558 Plate with hole cross 12,5x5</p>	 <p>A3506_0564 Plate with hole cross 10,3x4,5</p>
 <p>A3506_0556 Plate with hole cross 13x2,5</p>	 <p>A3506_0560 Flange with bolt square 10 mm short</p>	 <p>A3506_0561 Flange with bolt square 10 mm butterfly shape</p>	
 <p>A3506_0554 Motor head adapter 35 mm - 45 mm Allows use of Series 45 brackets for motors with universal head with shoulders (see pages 153-154)</p>			

BRACKETS FOR MOTORS Ø45



For all motors with universal head without shoulders

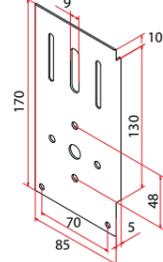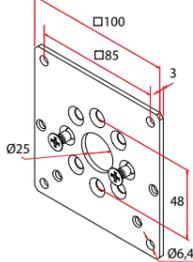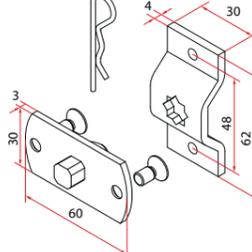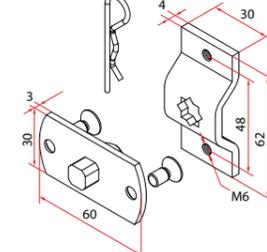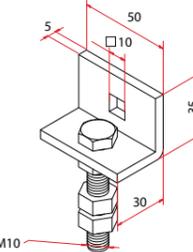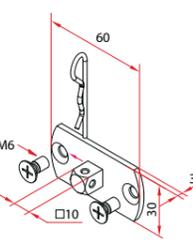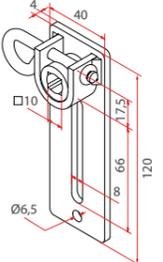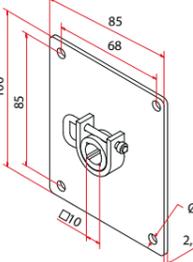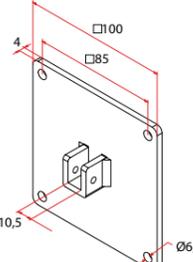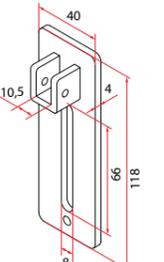all motor torques			
 <p>9014 Flange</p>	 <p>A4506_0559 "Vercelli" support plate</p>	 <p>A4506_0568 (zamac heads only) Plate 100x100</p>	 <p>A4506_0588 Bracket "Bloc-Baie"</p>
 <p>A4506_0616 (only for plastic head) Square pin 10 mm</p>	 <p>A4506_0638 Zamac bracket with spring</p>	 <p>A4506_0642 Steel support with spring</p>	
up to 32 Nm			
 <p>A4506_0556 (head in zama) A4506_0566 (head in plastic) Flanged 10 mm square pin with omega bar, through holes</p>	 <p>A4506_0557 (head in zama) A4506_0567 (head in plastic) Flanged 10 mm square pin with omega bar, M6 holes</p>	 <p>A4506_0558 Adjustable bracket with 10 mm square hole</p>	 <p>A4506_0580 (head in zama) A4506_0569 (head in plastic) 10 mm square pin with M6 screw</p>
 <p>A4506_0562 Adjustable bracket with 10 mm square hole, with release</p>	 <p>A4506_0561 Bracket with 10 mm square hole, with release</p>	 <p>A4506_0572 Bracket with 10 mm square hole, without release</p>	 <p>A4506_0573 Adjustable bracket with 10 mm square hole, without release</p>

BRACKETS FOR MOTORS Ø45

For all motors with universal head without shoulders

up to 32 Nm

<p>A4506_0597 Mosquito screen 10 short flanged square pin bracket</p>	<p>A4506_0600 Bracket with saddle square 10 mm</p>	<p>A4506_0621 Omega bar for 10 mm square, with M6 holes</p>	<p>A4506_0623 Star-shaped 10 mm square pin coupling removable head</p>
--	---	--	---

up to 20 Nm

<p>A4506_0595 SLO support plate</p>	<p>A4506_0641 Support 3 slots with release</p>	<p>A4506_0644 Snap-on bracket</p>	<p>A4506_0653 Support kit 100x100 ZF Croci-Veka</p>
--	---	--	--

<p>A4506_0656 Profine system sidewall support</p>	<p>FASTENING KIT</p> <p>Plate Bracket in plastic</p> <p>SYSTEM OPTime</p> <p>Fastening without screws: Compatible on all kind of side caps. Possibility of adjustment on all positions.</p>
--	--

Code	Description	Code	Description
A4506_0645	OPTime fastening kit 130	A4506_0649	OPTime fastening kit 165
A4506_0646	OPTime fastening kit 137	A4506_0650	OPTime fastening kit 170
A4506_0647	OPTime fastening kit 140	A4506_0651	OPTime fastening kit 180
A4506_0648	OPTime fastening kit 150	A4506_0652	OPTime fastening kit 205

BRACKETS FOR MOTORS Ø45

For all motors with universal head with shoulders and previous head

all motor torques

<p>A4506_0555 Universal bracket with fast coupling</p>	<p>A4506_0570 Adjustable snap-on bracket</p>	<p>A4506_0587 Snap-on bracket with holder "Demi linteau"</p>	<p>A4506_0612 Fast coupling bracket - "Wings"</p>
<p>A4506_0614 Fast coupling bracket on plate 100x100</p>	<p>A4506_0615 Fast coupling bracket on plate 80x80</p>	<p>A4506_0617 Universal bracket with wiring</p>	<p>A4506_0618 Inotic-side bracket</p>





up to 32 Nm

<p>A4506_0586 Bracket for Coffrelite end cap</p>	<p>A4506_0589 Snap-on bracket ZF</p>	<p>A4506_0591 Steel plate & snap-on bracket</p>	<p>A4506_0596 Fast coupling bracket in metal</p>
<p>A4506_0622 Fast coupling plate 130x60 with 3 slots</p>	<p>A4506_0640 Bracket 134x60</p>		


BRACKETS FOR MOTORS Ø45

For all motors with universal head with shoulders and previous head

up to 25 Nm

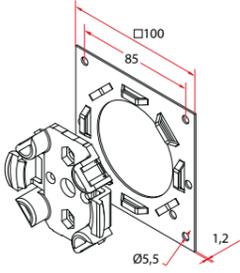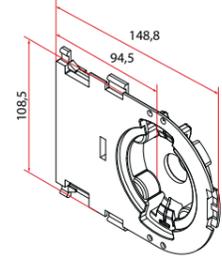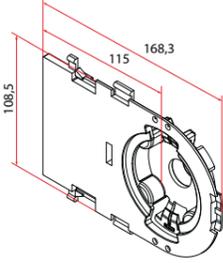 <p>A4506_0574 Snap-on bracket "Click OPTime"</p>	 <p>A4506_0581 Bracket 100x100 ZF - Croci - Veka</p>	 <p>A4506_0592 Plastival slide (short version)</p>	 <p>A4506_0593 Plastival slide (long version)</p>
---	--	---	---

up to 15 Nm





 <p>A4506_0627 Anti-vibration bracket with fast coupling</p>





SUPPORTS FOR OCEAN SERIES Ø45 MOTORS









Ocean
Ocean RX
Plug&Play Ocean Easy

all motor torques

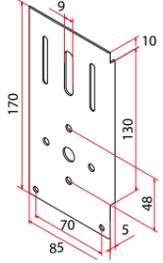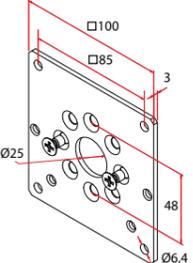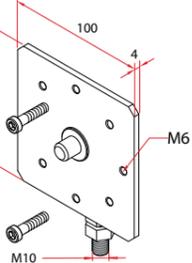 <p>9014 Flange</p>	 <p>A4506_0559 "Vercelli" support plate</p>	 <p>A4506_0568 Plate 100x100</p>	 <p>A4506_0571 Adjustable bracket for Ocean</p>
---	---	--	---

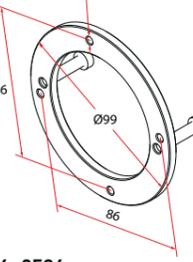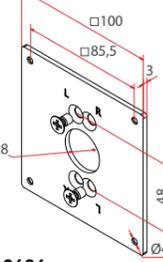 <p>A4506_0584 Fastening sliding ring</p>	 <p>A4506_0624 Plate 100x100 holes 12,5°</p>
--	---


up to 32 Nm

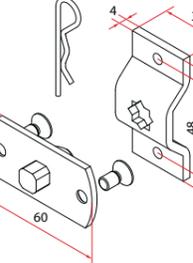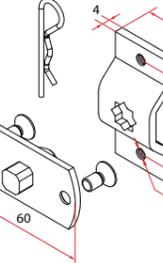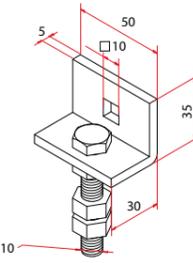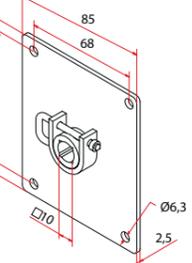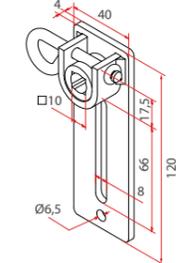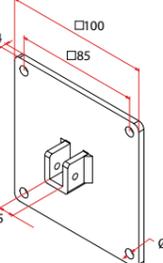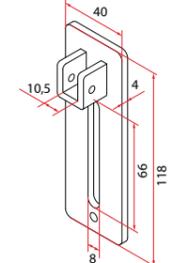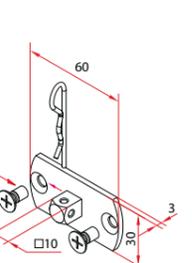 <p>A4506_0556 Flanged 10 mm square pin with omega bar, through holes</p>	 <p>A4506_0557 Flanged 10 mm square pin with omega bar, M6 holes</p>	 <p>A4506_0558 Adjustable bracket with 10 mm square hole</p>	 <p>A4506_0561 Bracket with 10 mm square hole, with release</p>
 <p>A4506_0562 Adjustable bracket with 10 mm square hole, with release</p>	 <p>A4506_0572 Bracket with 10 mm square hole, without release</p>	 <p>A4506_0573 Adjustable bracket with 10 mm square hole, without release</p>	 <p>A4506_0580 10 mm square pin with M6 screw</p>

SUPPORTS FOR OCEAN SERIES Ø45 MOTORS


Ocean
Ocean RX
Plug&Play Ocean Easy

up to 32 Nm

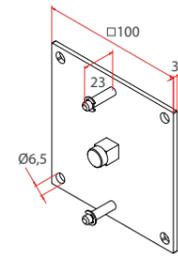

A4506_0632
Fast plate 100x100

up to 20 Nm

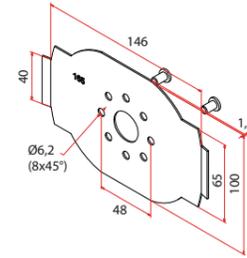


A4506_0628
Fixing for 165 mm sides


BRACKETS FOR MOTORS PLUG&PLAY SAFE EASY Ø45




all motor torques



A4506_0643
Omega plate Tradi ZF system

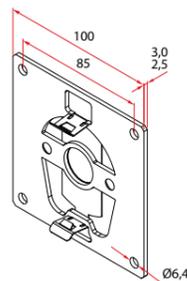


A4506_0654
Fast coupling bracket on plate 100x100




A4506_0655
Plate, center distance 81


BRACKETS FOR MOTORS Ø58




A4506_0554
Fast coupling bracket with spring split pins

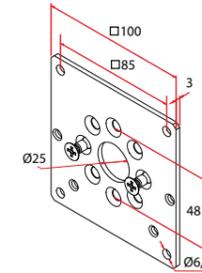


A4506_0568
Plate 100x100

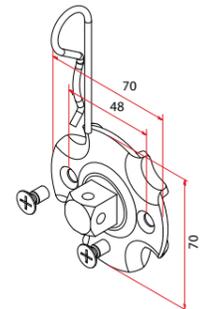

A5806_0555
Square pin 16 mm

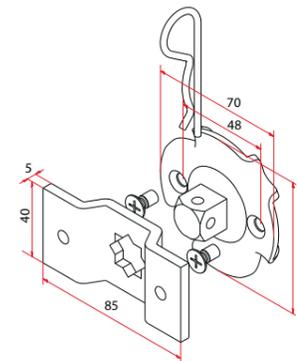


A5806_0551
Square pin 16 mm with omega bar

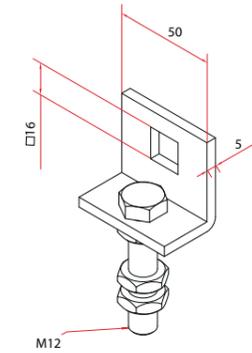


A5806_0558
Adjustable bracket with 16 mm square hole (up to 85 Nm)


Motor with override: **OCEAN**

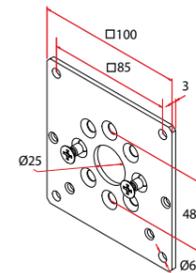

A4506_0568
Plate 100x100

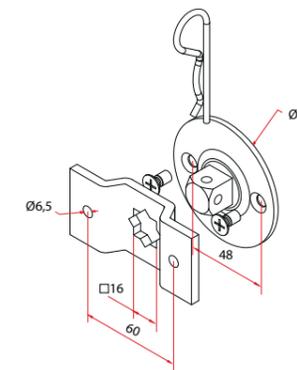

A5806_0552
Square pin 16 mm with omega bar for override

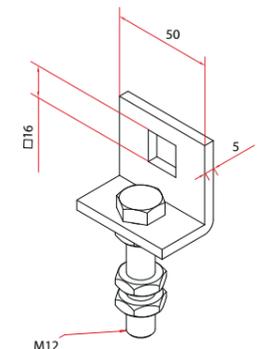

A5806_0558
Adjustable bracket with 16 mm square hole (up to 85 Nm)

ACCESSORIES




For manually operating motors of the series OCEAN, OCEAN RX, PLUG&PLAY OCEAN EASY and PLUG&PLAY SAFE EASY

 <p>Ref. 9100 150L CH02 Operating crank length 150 cm Only for OCEAN series motors</p>	 <p>Ref. 7463 150G 2101 Foldable crank with hook length 150 cm Only for OCEAN series motors</p>	 <p>Ref. 7461 150N 1606A Foldable crank with assembled tube length 150 cm</p>
 <p>Ref. 7721 7040 OC16 Outlet at 60°, fast coupling with eye Only for OCEAN series motors</p>	 <p>Ref. 7840 7033 OCNK (nickel plated) Ref. 7840 7043 OC16 (Ral 9016) Outlet at 90°, fast coupling with eye Only for OCEAN series motors</p>	 <p>Ref. 7705 7030 OCNK Outlet 55°, plate in nickel plated Zama, with eye Only for OCEAN series motors</p>
 <p>Ref. 8026 70 Magnetic outlet with plate</p>	 <p>Ref. 14987016 Ref. 8056M12 Ref. 8056V13 Magnetic outlets without plate</p>	 <p>Ref. 6015 Ref. 6015 7007 Hexagonal pole 7 w/71 mm protrusion+screw Ref. 6015 7018 Hexagonal pole 7 w/185 mm protrusion+screw</p>
 <p>Ref. 7840 7038 CA16 + 7844 12CA16 Outlet at 90° magnetic + magnetic gear reduction</p>	 <p>Ref. 6010 7008 CH16 Eye with hexagon 7 x 86 mm Ref. 6010 7012 CH16 Eye with hexagon 7 x 126 mm Ref. 6010 7018 CH16 Eye with hexagon 7 x 186 mm Only for OCEAN series motors</p>	 <p>Ref. 7810 Plate 85x40x2 mm Hole cover plate designed for manual override on cassette</p>


Control system for indoor venetian blinds, compatible with various models of Ø 35 tubular motor.

The cone raising mechanism included in the kit allows thin strings to be used to adjust the light, improving the visibility and aesthetics of the venetian blind.

The system can be installed in 57 mm x 51 mm rails and is suitable for venetian blinds with 15 mm to 50 mm wide aluminium or wooden slats.

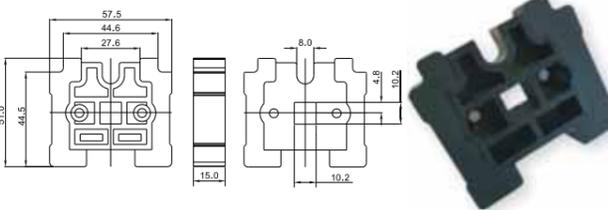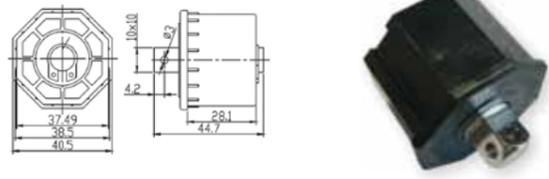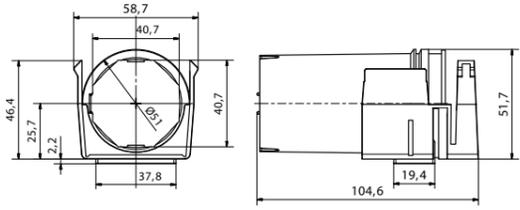 <p>A3516_5177 Support in plastic material for head-rail 58x56 with square hole 10,2 mm</p>	 <p>A3515_5179 Cap for octagonal tube 40</p>
 <p>A3516_5180 Tilter with bracket</p>	

Application example

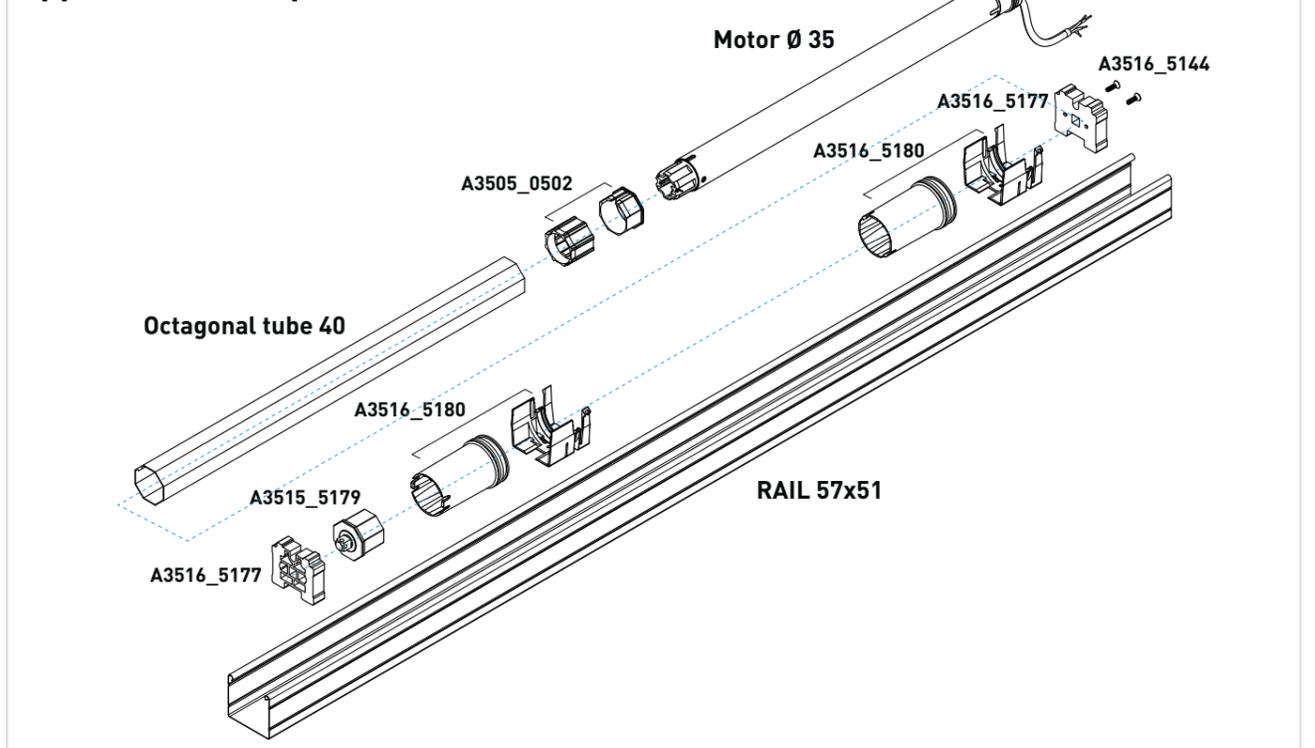

SAFETY STOPS



A4516_5746
Safety stop
2 Meshes



A4516_5747
Safety stop
3 Meshes



A4516_5748
Safety stop ring
Octagonal 60



A4516_5749
Safety stop ring
Octagonal 70



A4516_5B68
Glass-fibre reinforced safety stop and metal plate
2 Meshes - plate 60 mm



A4516_5H86
Glass-fibre reinforced safety stop and metal plate
3 Meshes - plate 60 mm



721502
Safety clip stop for ZF54 ZF64 JD53 2 Links



721509
Extension for safety clip stop - change from 2 to 3 links

Code	Description
721500	Clip-on safety stop tool
721503	Safety clip for ZF54 ZF64 JD53 1 Mesh
721505	Safety clip stop for Octagon 60-interaxis 1=60 2 links
721508	Safety clip for Octagon 60-interaxis 1=60 1 Mesh

GENERAL SALES TERMS AND CONDITIONS

- Orders** - All orders will only be accepted according to the following conditions. We will confirm your order in writing by our Order Confirmation. It is the customer's responsibility to check the order confirmation. Any differences in specification or terms shown on the order confirmation must be notified to Cherubini within 5 days of the date of the order confirmation, otherwise the customer has to accept the goods as shown on the order confirmation.
- Prices** - Our price list shows only indicative prices. If any extraordinary or unexpected circumstances change the conditions stated at the moment of the contract the company has the right to change prices with a prior notice. Any price negotiations, conducted by agents or sub-agents, require the authorisation of Cherubini before these prices can become operable.
- Delivery** - Goods are shipped at the buyer's risk, even if these parts are being shipped for a free delivery shipment.
- Payments** - Cherubini retains the ownership of the goods until all payments have been made for them. The payment of the amount of the invoice must be paid within the terms and conditions indicated on the invoice. Failure to make payments in accordance with these terms and conditions may incur the imposition of a 3% penalty interest rate higher than the official discount rate of the moment.
- Deliveries** - Deliveries will be made in accordance with our normal trading terms and conditions. However, should any unforeseen circumstance arise which precludes a delivery being made, the customer will have no rights to seek compensation of any kind from Cherubini.
- Claims** - The goods will be considered completely accepted by the customers after 8 days from their receiving. All claims must be in writing and sent to Cherubini by registered letter within eight days of the customer receiving the goods. In case of goods subject to a manufacturing defect, such goods will be replaced ex works as quickly as possible. No claims will be allowed for direct or consequential loss arising from damage caused by the operation of our products. All replacement of product will be authorised and carried out only by Cherubini. Any delay in payment by the buyer will nullify all sales agreements.
- Controversy** - All disputes arising from any matter resulting from the supply of product to a customer will only be settled by the Law Court of Brescia, Italy.

WARRANTY

CHERUBINI GUARANTEES ITS MOTORS AND RELATED ACCESSORIES TO BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP UNDER NORMAL AND PROPER USE, AT THE FOLLOWING CONDITIONS:

PERIOD

Cherubini warrants its tubular motors for a period of five (5) years. The electrical and electronic accessories (including the control systems) have a two (2) year warranty. All warranties start from the date of manufacturing.

WARRANTY APPLICATION

Cherubini has an obligation under the terms of this warranty to repair or replace any parts found to be defective as quickly as possible. Cherubini shall retain any parts replaced under warranty. The buyer is responsible for all freight costs associated with the repair, or replacement of the parts, without any obligation of assistance on the spot by Cherubini.

WARRANTY LIMITATIONS

The following will render the warranty null and void:

- If the product has been opened or dismantled, or there are clear signs the product has been subject to abuse or other damage.
- If the buyer has selected a product which is not in accordance with our written product specifications.
- If the buyer or his agent has not followed the written installation and wiring instructions issued by Cherubini.
- If our products are used in a manner for which they were not designed or they are used with accessories which have not previously been approved in writing by the Technical Department of Cherubini.
- If any of the electrical accessories or controls have not been wired or installed in the manner depicted in our installation instructions.

PRODUCT USE LIMITATIONS

Cherubini has designed the range of products for use in operating awnings, shutters or screens for sun protection, provided they are not in continuous use. These products must be installed according to IEC Standards or any other rule in force at the moment of their installation or planning.



The products and details shown in this catalogue are for information only, and may be changed at any time, without notice.

Cherubini S.p.A.

Via Adige, 55 - 25081 Bedizzole (BS) - Italia
Tel. +39 030 6872 039 - Fax +39 030 6872 040
info@cherubini.it
www.cherubini.it

Cherubini Iberia S.L.

Avda. Unión Europea 11-H - Apdo. 283
P. I. El Castillo - 03630 Sax - Alicante - Spagna
Tel. +34 966 967 504 - Sat +34 966 969 024
info@cherubini.es
www.cherubini.es

Cherubini France S.a.r.l.

ZI Du Mas Barbet
165 Impasse Ampère - 30600 Vauvert - Francia
Tél. +33 (0) 466 77 88 58 - Fax +33 (0) 466 77 92 32
info@cherubini.fr
www.cherubini.fr

Cherubini Deutschland GmbH

Siemensstrasse 40 - 53121 Bonn - Germania
Tel. +49 (0) 228 962976 34/35
Fax +49 (0) 228 962976 36
info@cherubini-group.de
www.cherubini-group.de

Cherubini Türkiye

Ritim Istanbul - D-100 Güney Yanyolu
Cevizli Mahallesi, Zuhul Caddesi
34846 Maltepe - Istanbul
Tel/Fax +90 (0) 216 515 6287
info@cherubini.com.tr
www.cherubini.com.tr

Sales Germany:

Udo Ebner

Tel. +49 (0) 7143 872 359 - Fax +49 (0) 7143 872 363
udo.ebner@cherubini.it



Sales Switzerland:

Andrea Grisolia

Mobil +41 (0) 79 431 81 71
andrea.grisolia@cherubini.it



By choosing FSC®, certified products, we are support responsible management of the world's forest. The inks used for this catalog, based on vegetable oil, use renewable natural raw materials, thus responding to the growing demand for products compatible with the environment.